

UTILITY CONSTRUCTION

ALL WATER LINES OWNED BY ROBESON COUNTY

PROP.
5 - RELOCATE EXISTING WATER METER
215M OF 20MM PE WATER TUBING, SDR 7,
1.38MPA WP
5 - 200MM X 20MM TAPPING SADDLES
5 - 20MM CORPORATION STOPS
CONNECT USING NECESSARY FITTINGS



PROP. 661M - FILL OR REMOVE
ABANDONED 200MM PIPE, PVC WATER

PROP.
1 - REMOVE EXISTING
WATER METER

PROP.
1 - RELOCATE EXISTING WATER METER
2M OF 20MM PE WATER TUBING, SDR 7,
1.38MPA WP
1 - 200MM X 20MM TAPPING SADDLE
1 - 20MM CORPORATION STOP
CONNECT USING NECESSARY FITTINGS

PROP. 666M OF 200MM PVC WATER
PIPE, SDR 21, 1.38MPA WP
4 - 200MM 22 1/2° DI BENDS
CONNECT USING NECESSARY FITTINGS

RELOCATE HYDRANT
SEE SHEET UC-14

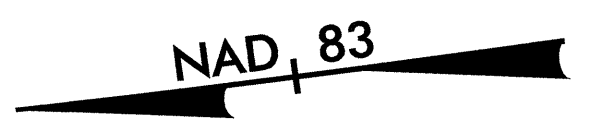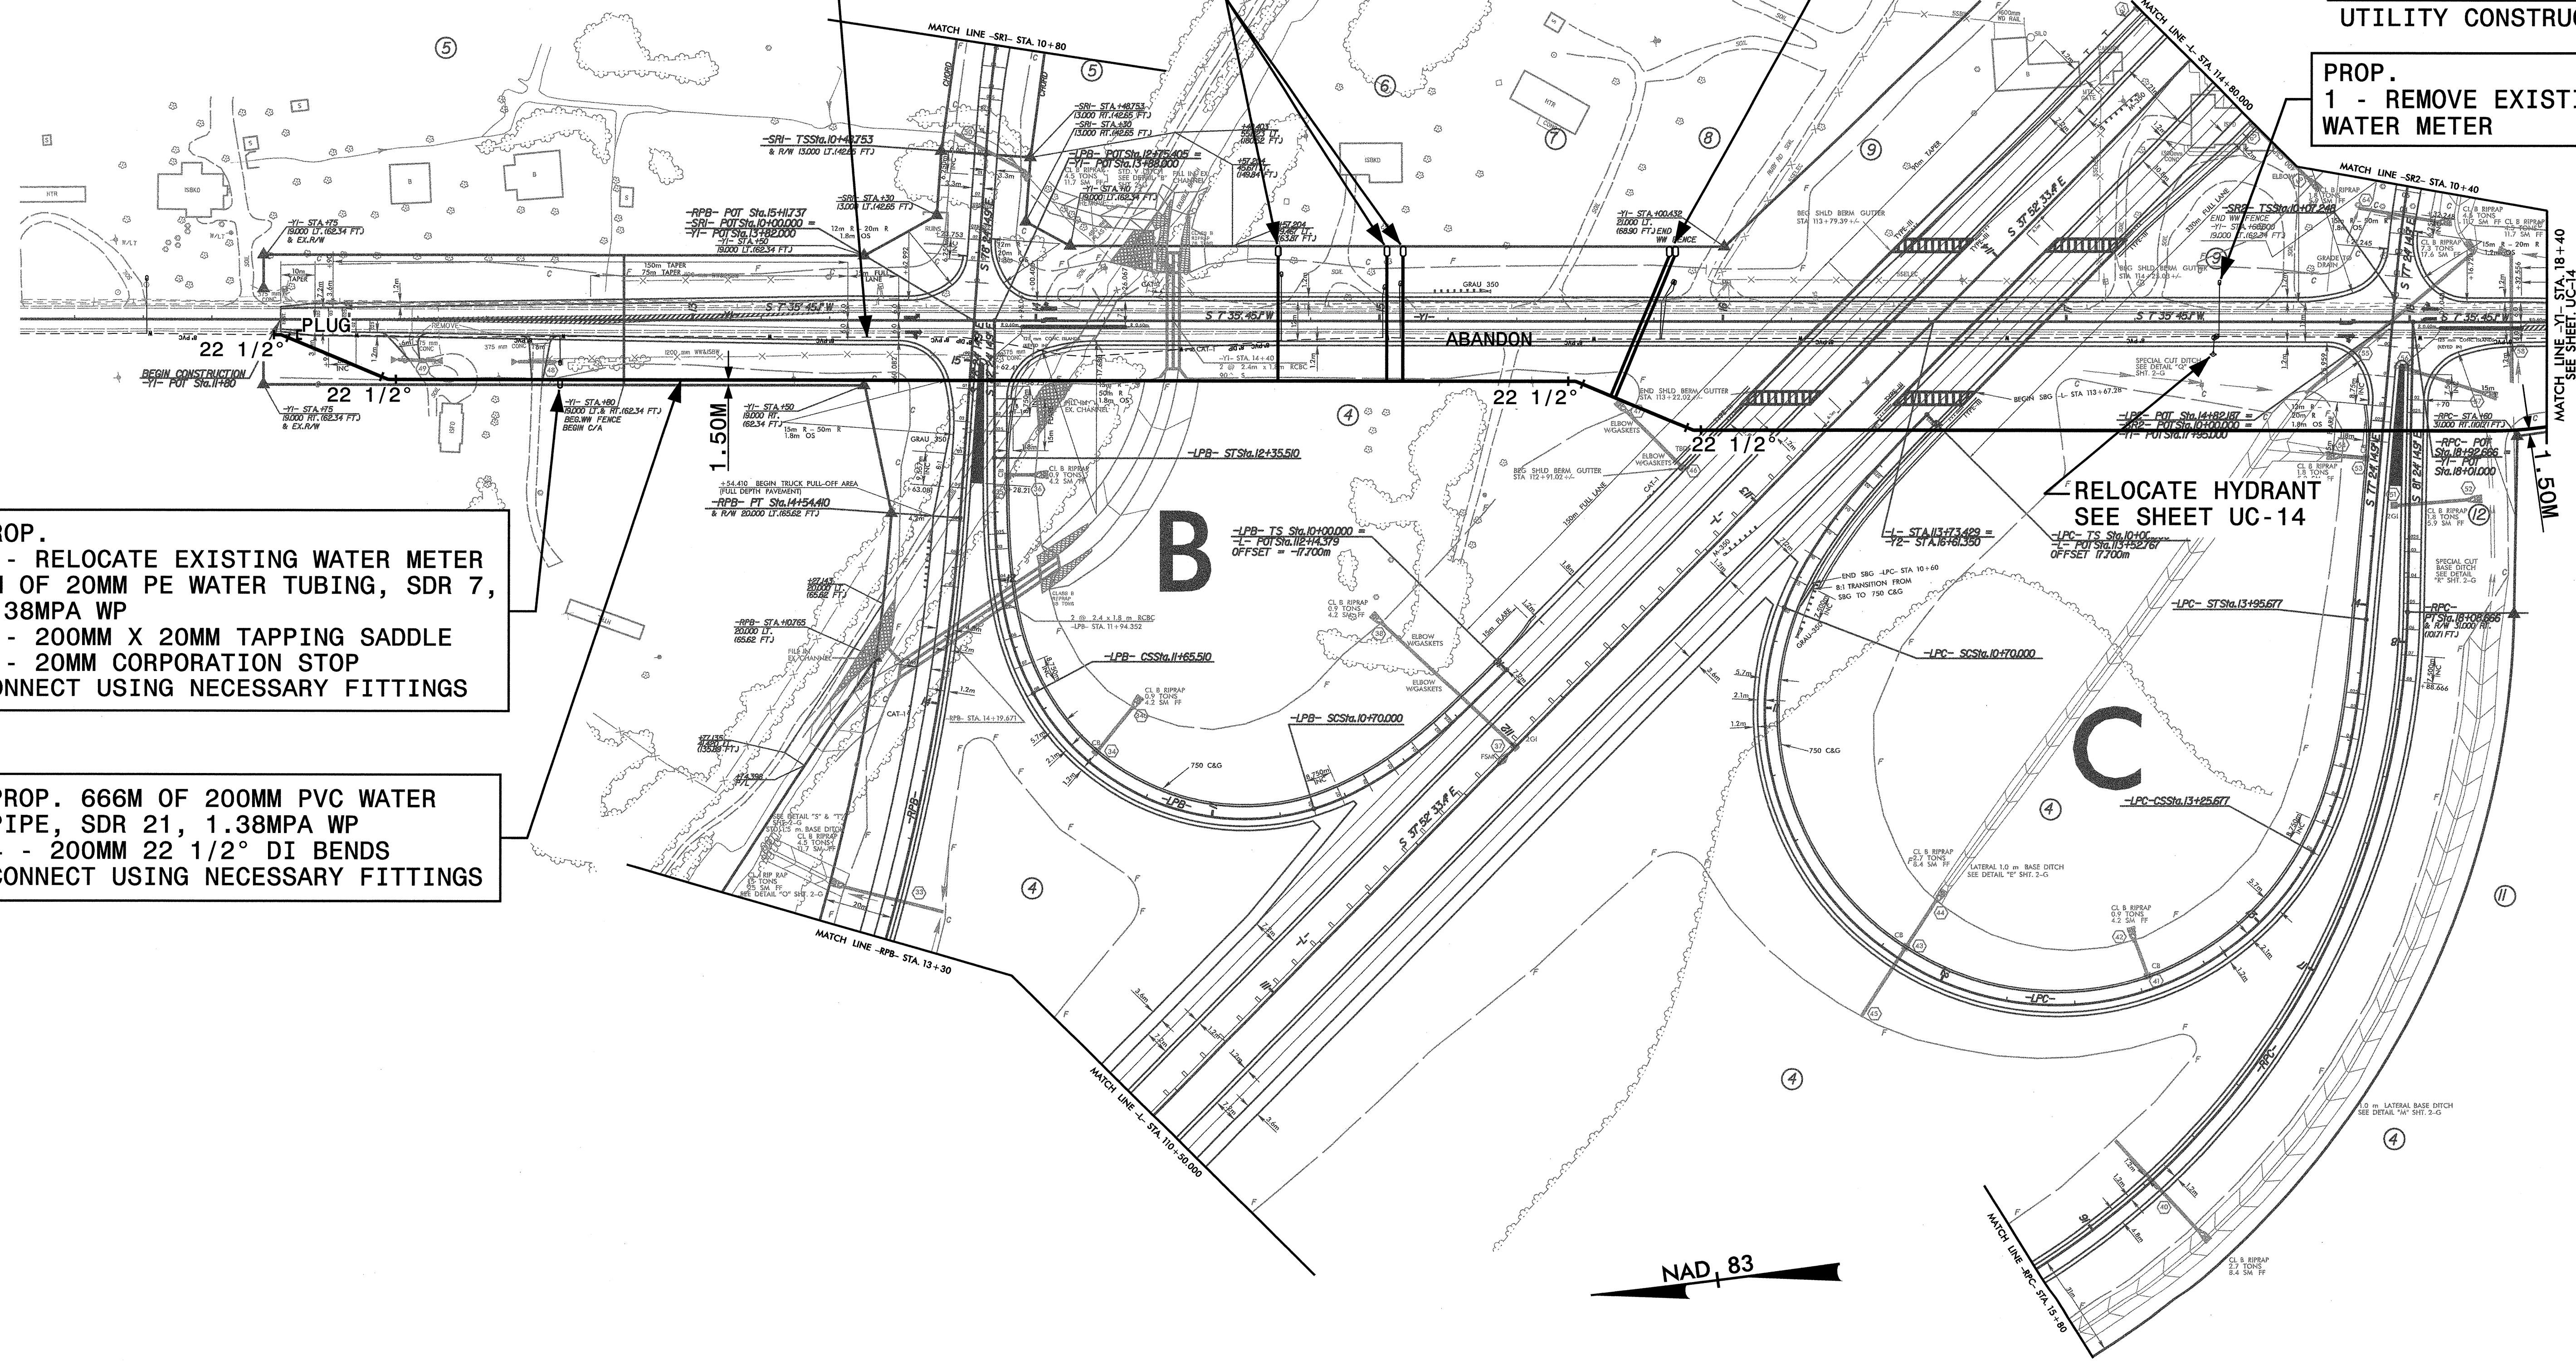

N:\705\A\CADD\N-05\13BA\05\13BAUC12.dwg
 08/31/2014 09:16:03 AM