



PLAN OF RAIL POST SPACINGS

NOTE: ARC DIMENSIONS ARE MEASURED TO THE CENTER OF THE BOLT GROUP ALONG AN ARC 194mm FROM THE BACKFACE OF THE PARAPET.


ANGLE TO BE MADE FROM 12mm X 102mm X 279mm P AND 12mm X 102mm X 102mm P

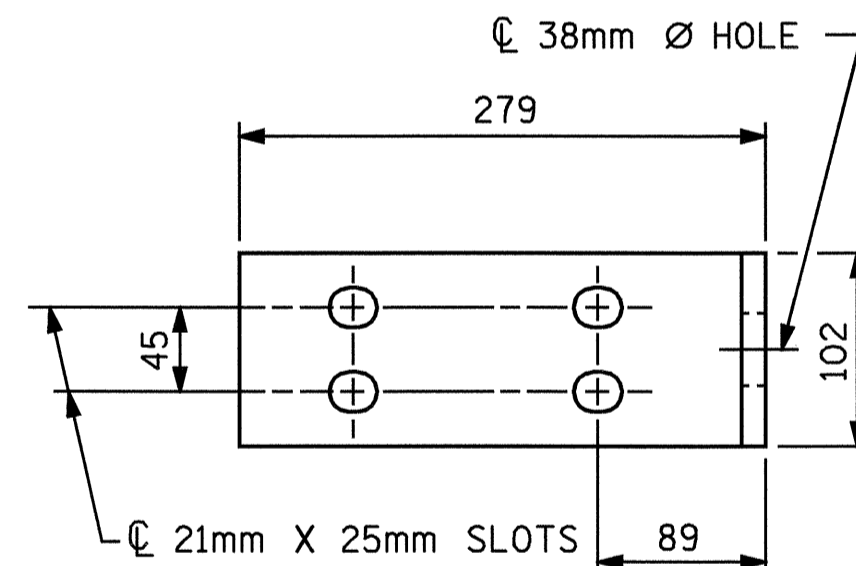


ELEVATION

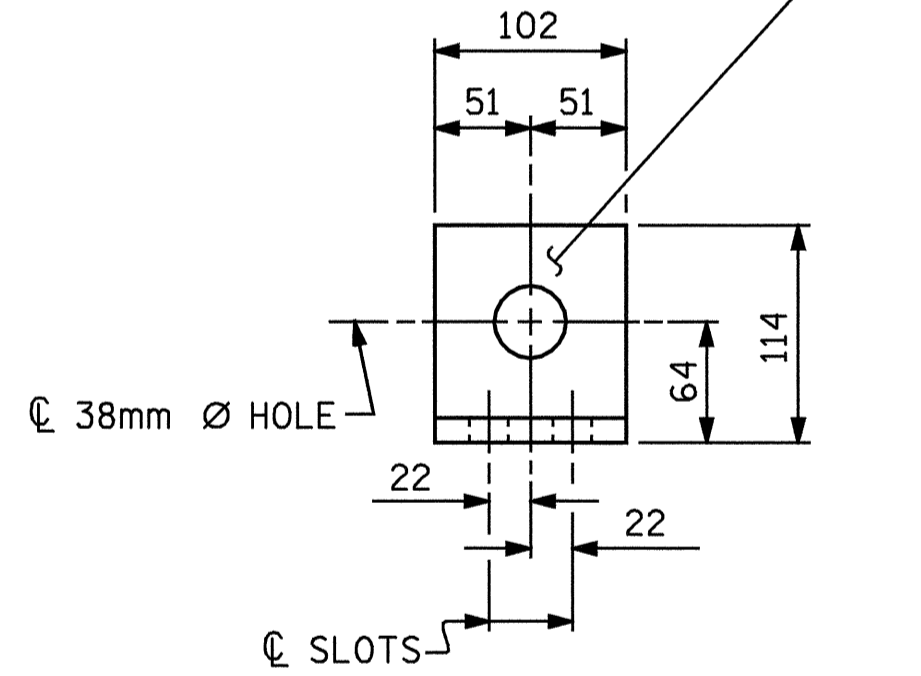


END VIEW (FIX AND EXP.)

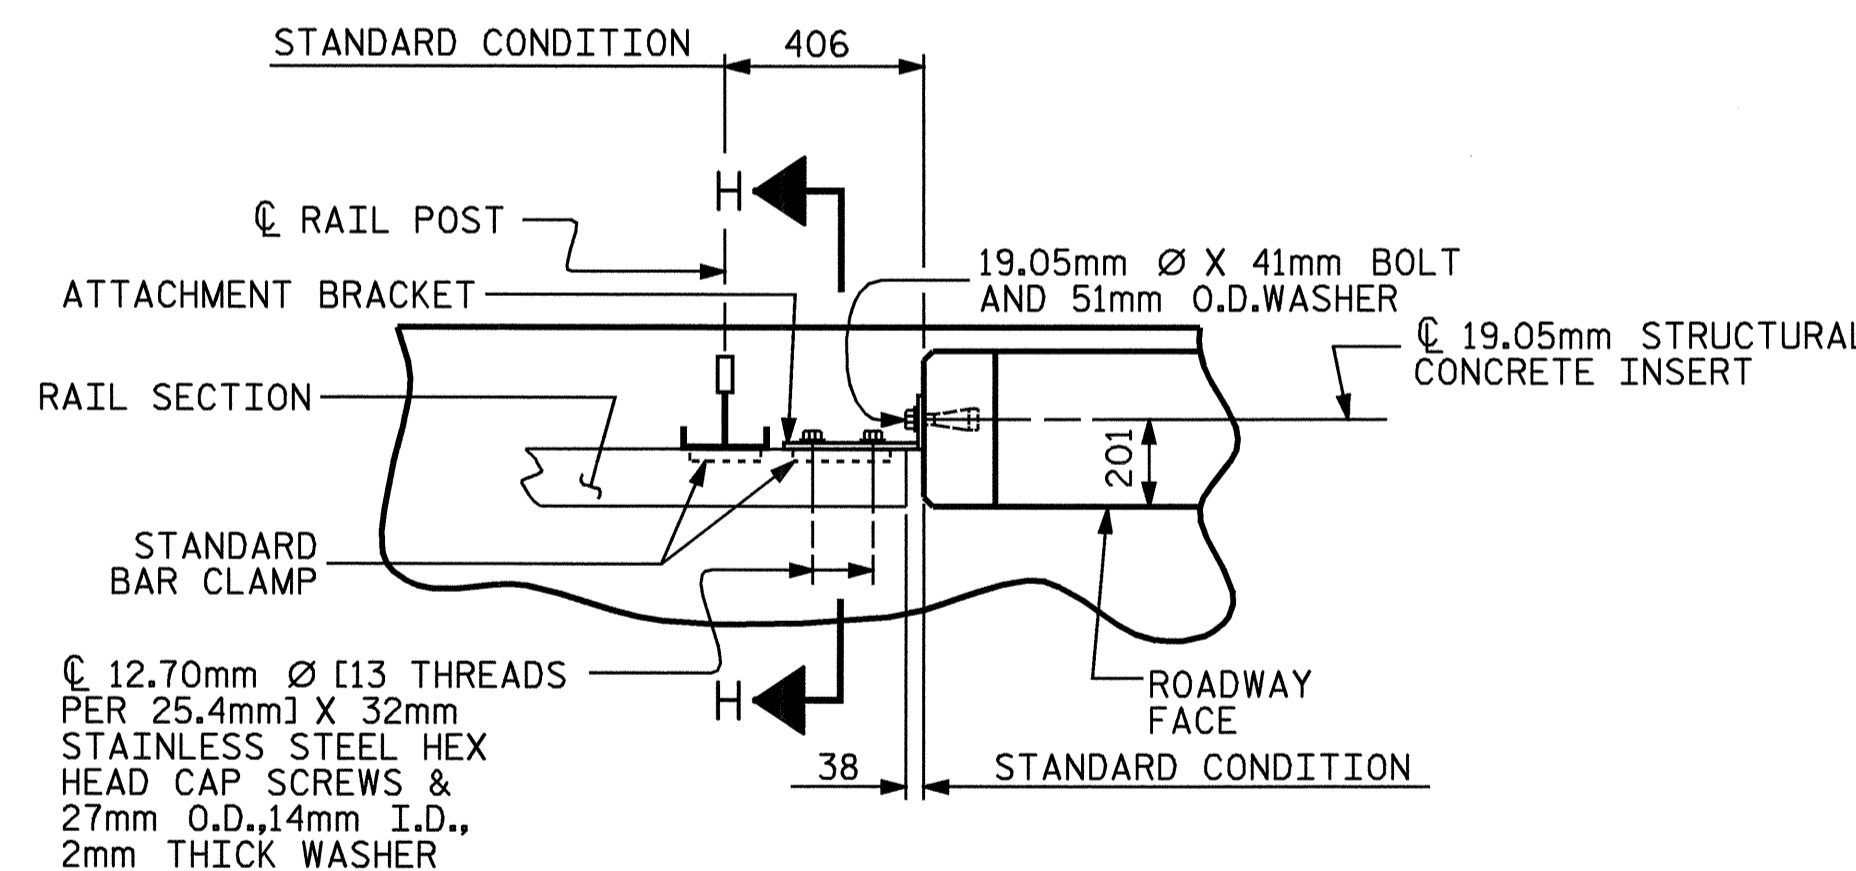

PLAN - RAIL AND END POST

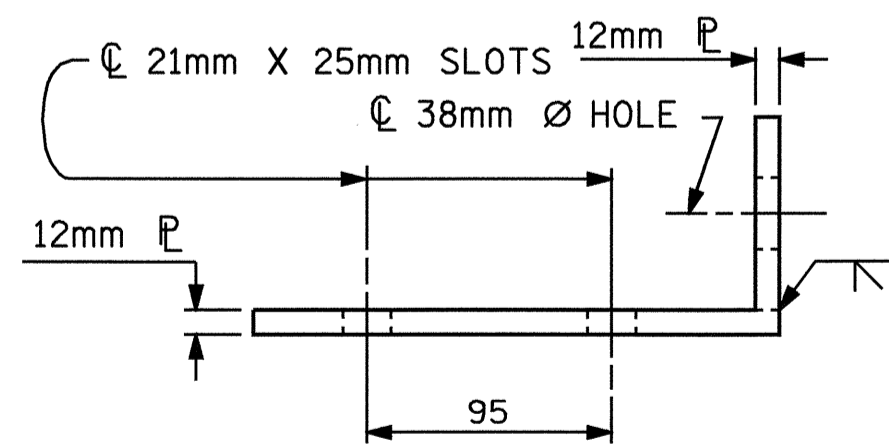


TOP VIEW

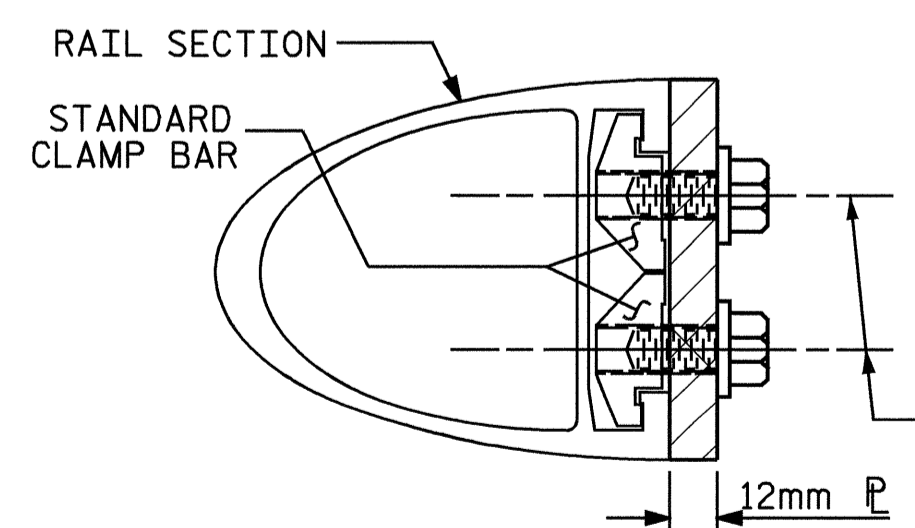


SECTION H-H (FIX)

DETAILS FOR ATTACHING METAL RAIL TO END POST

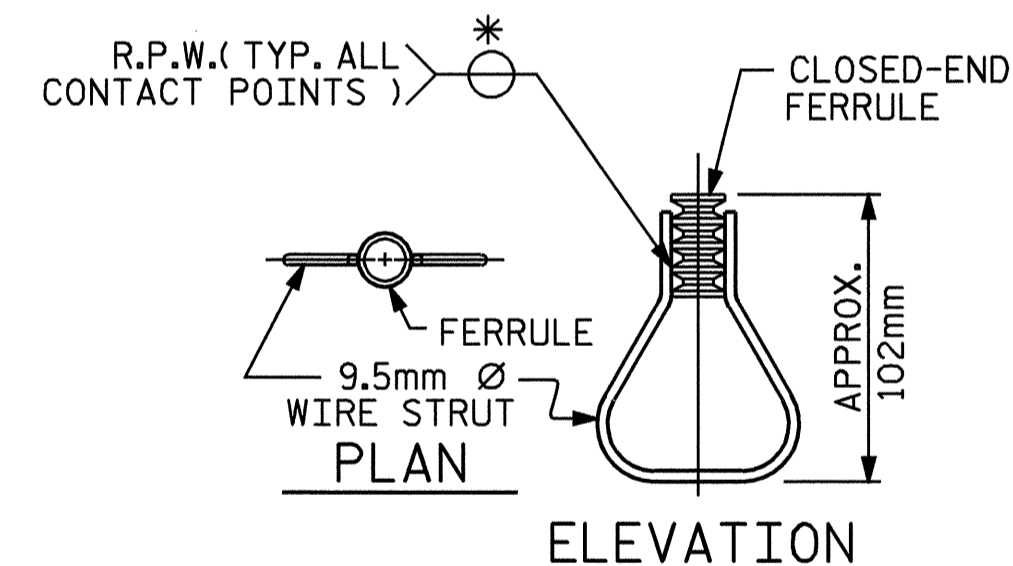

STRUCTURAL CONCRETE INSERT

* EACH WELDED ATTACHMENT OF WIRE TO FERRULE SHALL DEVELOP THE TENSILE STRENGTH OF THE WIRE.

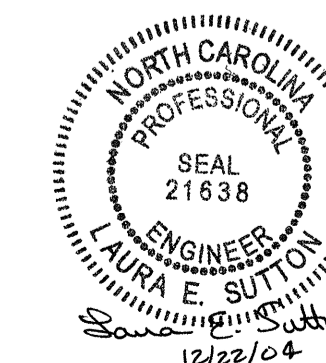

NOTES

STRUCTURAL CONCRETE INSERT

THE STRUCTURAL CONCRETE INSERT ASSEMBLY SHALL CONSIST OF THE FOLLOWING COMPONENTS:

- A. FERRULES SHALL BE MADE FROM STEEL MEETING THE REQUIREMENTS OF AASHTO M169, GRADE 12L14 AND SHALL HAVE A MINIMUM LENGTH OF THREADS OF 38mm.
- B. 1 - 19.05mm Ø X 41mm BOLT WITH WASHER. BOLT SHALL CONFORM TO THE REQUIREMENTS OF ASTM A307. BOLT AND WASHER SHALL BE GALVANIZED. (AT THE CONTRACTOR'S OPTION, STAINLESS STEEL BOLT AND WASHER MAY BE USED AS AN ALTERNATE FOR THE 19.05mm Ø X 41mm GALVANIZED BOLT AND WASHER. THEY SHALL CONFORM TO OR EXCEED THE MECHANICAL REQUIREMENTS OF ASTM A307. THE USE OF THIS ALTERNATE SHALL BE APPROVED BY THE ENGINEER.)
- C. WIRE STRUT SHOWN IN THE CONCRETE INSERT ASSEMBLY DETAIL IS THE MINIMUM ALLOWABLE SIZE AND SHALL HAVE A MINIMUM TENSILE STRENGTH OF 689 MPa. AS AN OPTION, A 11mm Ø WIRE STRUT WITH A MINIMUM TENSILE STRENGTH OF 620 MPa. IS ACCEPTABLE.

NOTES

METAL RAIL TO END POST CONNECTION

THE METAL RAIL TO END POST CONNECTION SHALL CONSIST OF THE FOLLOWING COMPONENTS :

- A. 12mm PLATES SHALL CONFORM TO AASHTO M270 GRADE 250 AND SHALL BE GALVANIZED AFTER FABRICATION.
- B. 19.05mm STRUCTURAL CONCRETE INSERT SHALL HAVE A WORKING LOAD SHEAR CAPACITY OF 21.4 kN. THE FERRULES SHALL ENGAGE A 19.05mm Ø X 41mm BOLT WITH 51mm O.D. WASHER IN PLACE. THE 19.05mm Ø X 41mm BOLT SHALL HAVE N. C. THREADS.
- C. CAP SCREWS FOR RAIL ATTACHMENT TO ANGLE SHALL CONFORM TO THE REQUIREMENTS OF ASTM F593 ALLOY 305 STAINLESS STEEL. CAP SCREWS TO BE CENTERED IN SLOTS AT 16°C.
- D. STANDARD CLAMP BARS (SEE METAL RAIL SHEET).
- E. 13mm Ø PIPE SLEEVES (IF REQUIRED) TO BE GALVANIZED.

THE COST OF THE STANDARD CLAMP BARS AND CAP SCREWS USED IN THE METAL RAIL TO END POST CONNECTION SHALL BE INCLUDED IN THE UNIT CONTRACT PRICE BID FOR METERS OF 1 OR 2 BAR METAL RAILS.

THE 19.05mm STRUCTURAL CONCRETE INSERT WITH BOLT SHALL BE ASSEMBLED IN THE SHOP.

THE COST OF THE 19.05mm STRUCTURAL CONCRETE INSERT ASSEMBLY, AND THE 12mm PLATES COMPLETE IN PLACE SHALL BE INCLUDED IN THE VARIOUS PAY ITEMS.

THE CONTRACTOR, AT HIS OPTION, MAY USE AN ADHESIVE BONDING SYSTEM IN LIEU OF THE STRUCTURAL CONCRETE INSERT EMBEDDED IN THE END POST. IF THE ADHESIVE BONDING SYSTEM IS USED, THE 19.05mm Ø X 41mm BOLT WITH WASHER SHALL BE REPLACED WITH A 19.05mm Ø X 165mm BOLT AND 51mm O.D. WASHER. ALL SPECIFICATIONS THAT APPLY TO THE 19.05mm Ø X 41mm BOLT SHALL APPLY TO THE 19.05mm Ø X 165mm BOLT. SEE SPECIAL PROVISIONS FOR "ADHESIVELY ANCHORED ANCHOR BOLTS AND DOWELS". FIELD TESTING OF THE ADHESIVE BONDING SYSTEM IS NOT REQUIRED.

GROOVED CONTRACTION JOINTS, 12mm IN DEPTH, SHALL BE TOOLED IN ALL EXPOSED FACES OF THE PARAPET IN ACCORDANCE WITH ARTICLE 825-10(B) OF THE STANDARD SPECIFICATIONS. THE CONTRACTION JOINTS SHALL BE LOCATED AT A SPACING OF 2.4m TO 3.5m BETWEEN EXPANSION JOINTS. NO CONTRACTION JOINTS WILL BE REQUIRED FOR SEGMENTS LESS THAN 3.5m IN LENGTH.

ASSEMBLED BY : B.N.BARODAWALA	DATE : 4-12-04
CHECKED BY : MIKE ALLEN	DATE : 10-21-04
DRAWN BY : WJH	3/89
CHECKED BY : CRK	3/89
REV. 8/16/99	RWW/LES
REV. 10/17/00	LES/RDR
REV. 5/7/03	RWW/JTE

PROJECT NO. R-0977A
CHEROKEE COUNTY
STATION: 68+58.000-LREV-

SHEET 3 OF 3

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
STANDARD
RAIL POST SPACINGS
AND
END OF RAIL DETAILS
FOR TWO BAR METAL RAILS

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-205
1			3			TOTAL SHEETS
2			4			230

STR. #5

STD. NO. BMR2SM