
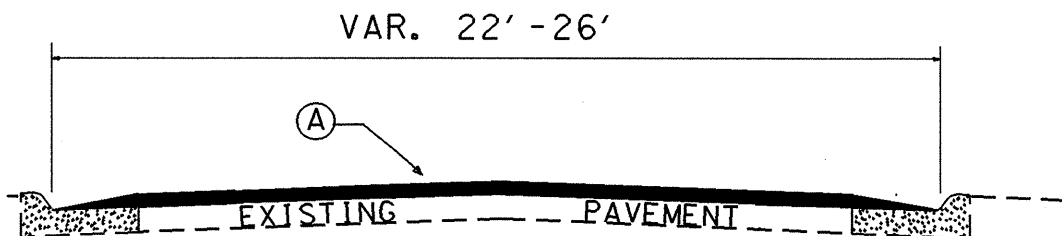
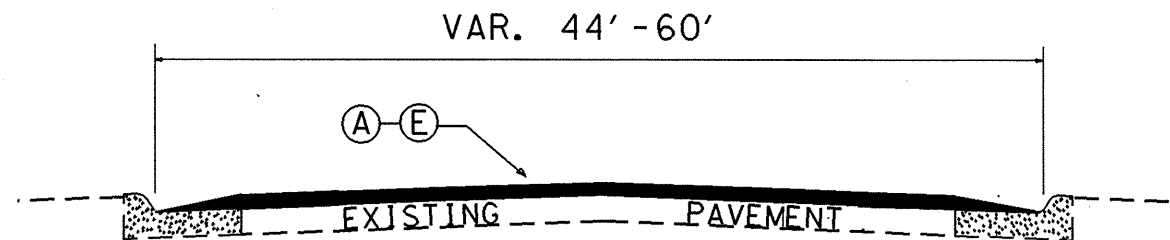
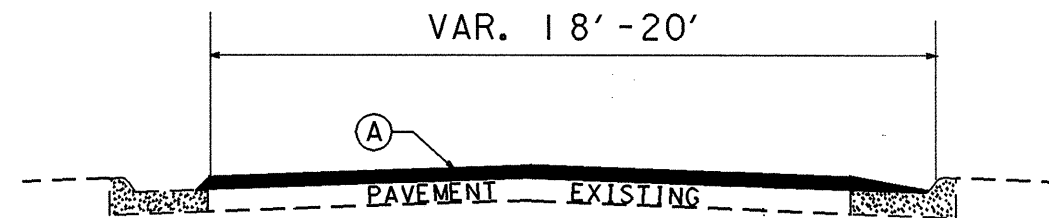
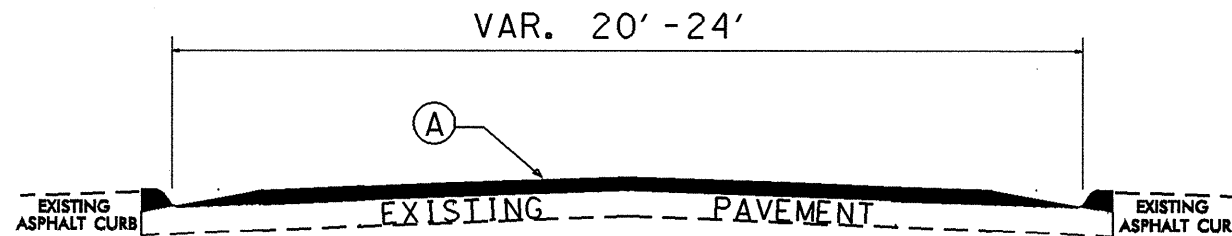
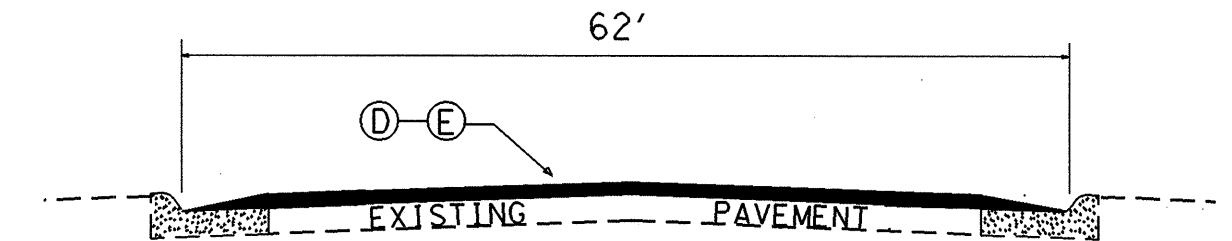
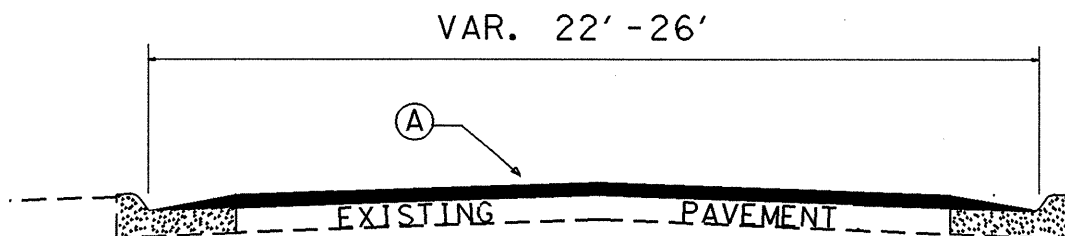
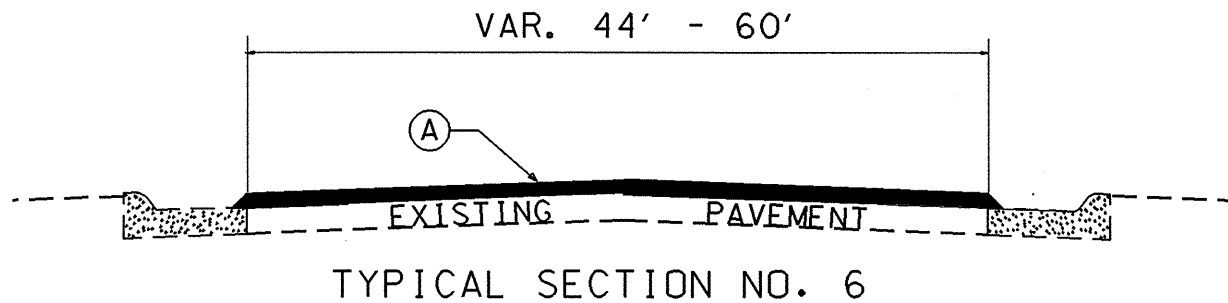


PAVEMENT SCHEDULE	
A	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
B	SHOULDER RECONSTRUCTION
C	PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
D	PROP. APPROX. 5/8" ULTRA THIN ASPHALT CONCRETE SURFACE COURSE, TYPE B, AT AN AVERAGE RATE
E	MILL ASPHALT PAVEMENT APPROX. 1½"

- 12CR. 10361.2
- 12CR. 20361.3
- 12CR. 303601.2
- 12CR. 303606.1
- 12CR. 303613.2
- 12CR. 303623.2
- 12CR. 303627.2
- 12CR. 303637.1
- 12CR. 303638.1
- 12CR. 303695.1

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.
MILL BRIDGE APPROACHES 100' TO PROVIDE A SMOOTH TRANSITION AS DIRECTED.

PROJ. REFERENCE NO.	SHEET NO.	TOTAL SHEETS
	14	19
STATE PROJ. NO.	F. A. PROJ. NO.	DESCRIPTION

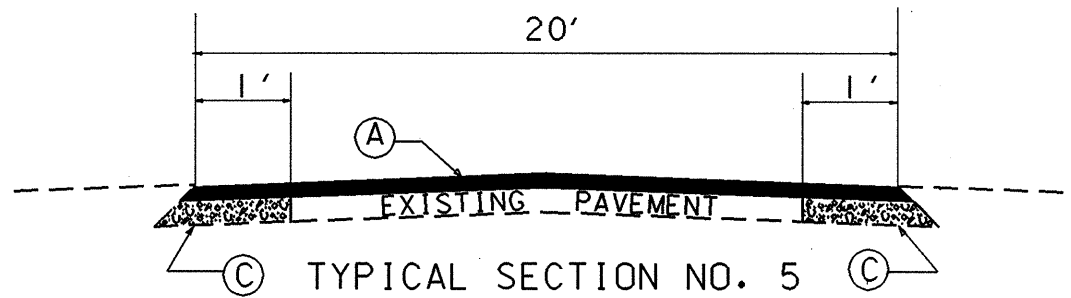

TYPICAL SECTION NO. 8