


PROJECT REFERENCE NO.	SHEET NO.
B-4320	EC-3/CONST.4
R/W SHEET NO.	HYDRAULICS ENGINEER
ROADWAY DESIGN ENGINEER	

- NOTE: PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.
- NOTE: TEMPORARY SILT FENCE AND SPECIAL SEDIMENT CONTROL FENCE SHALL BE INSTALLED A MINIMUM OF 3 FEET FROM TOE OF FILL IN WETLAND AREAS
- NOTE: UTILIZE TEMPORARY ROCK SEDIMENT DAM TYPE - B AND/OR TEMPORARY ROCK SILT CHECK TYPE - A AS STILLING BASIN WHERE APPLICABLE.

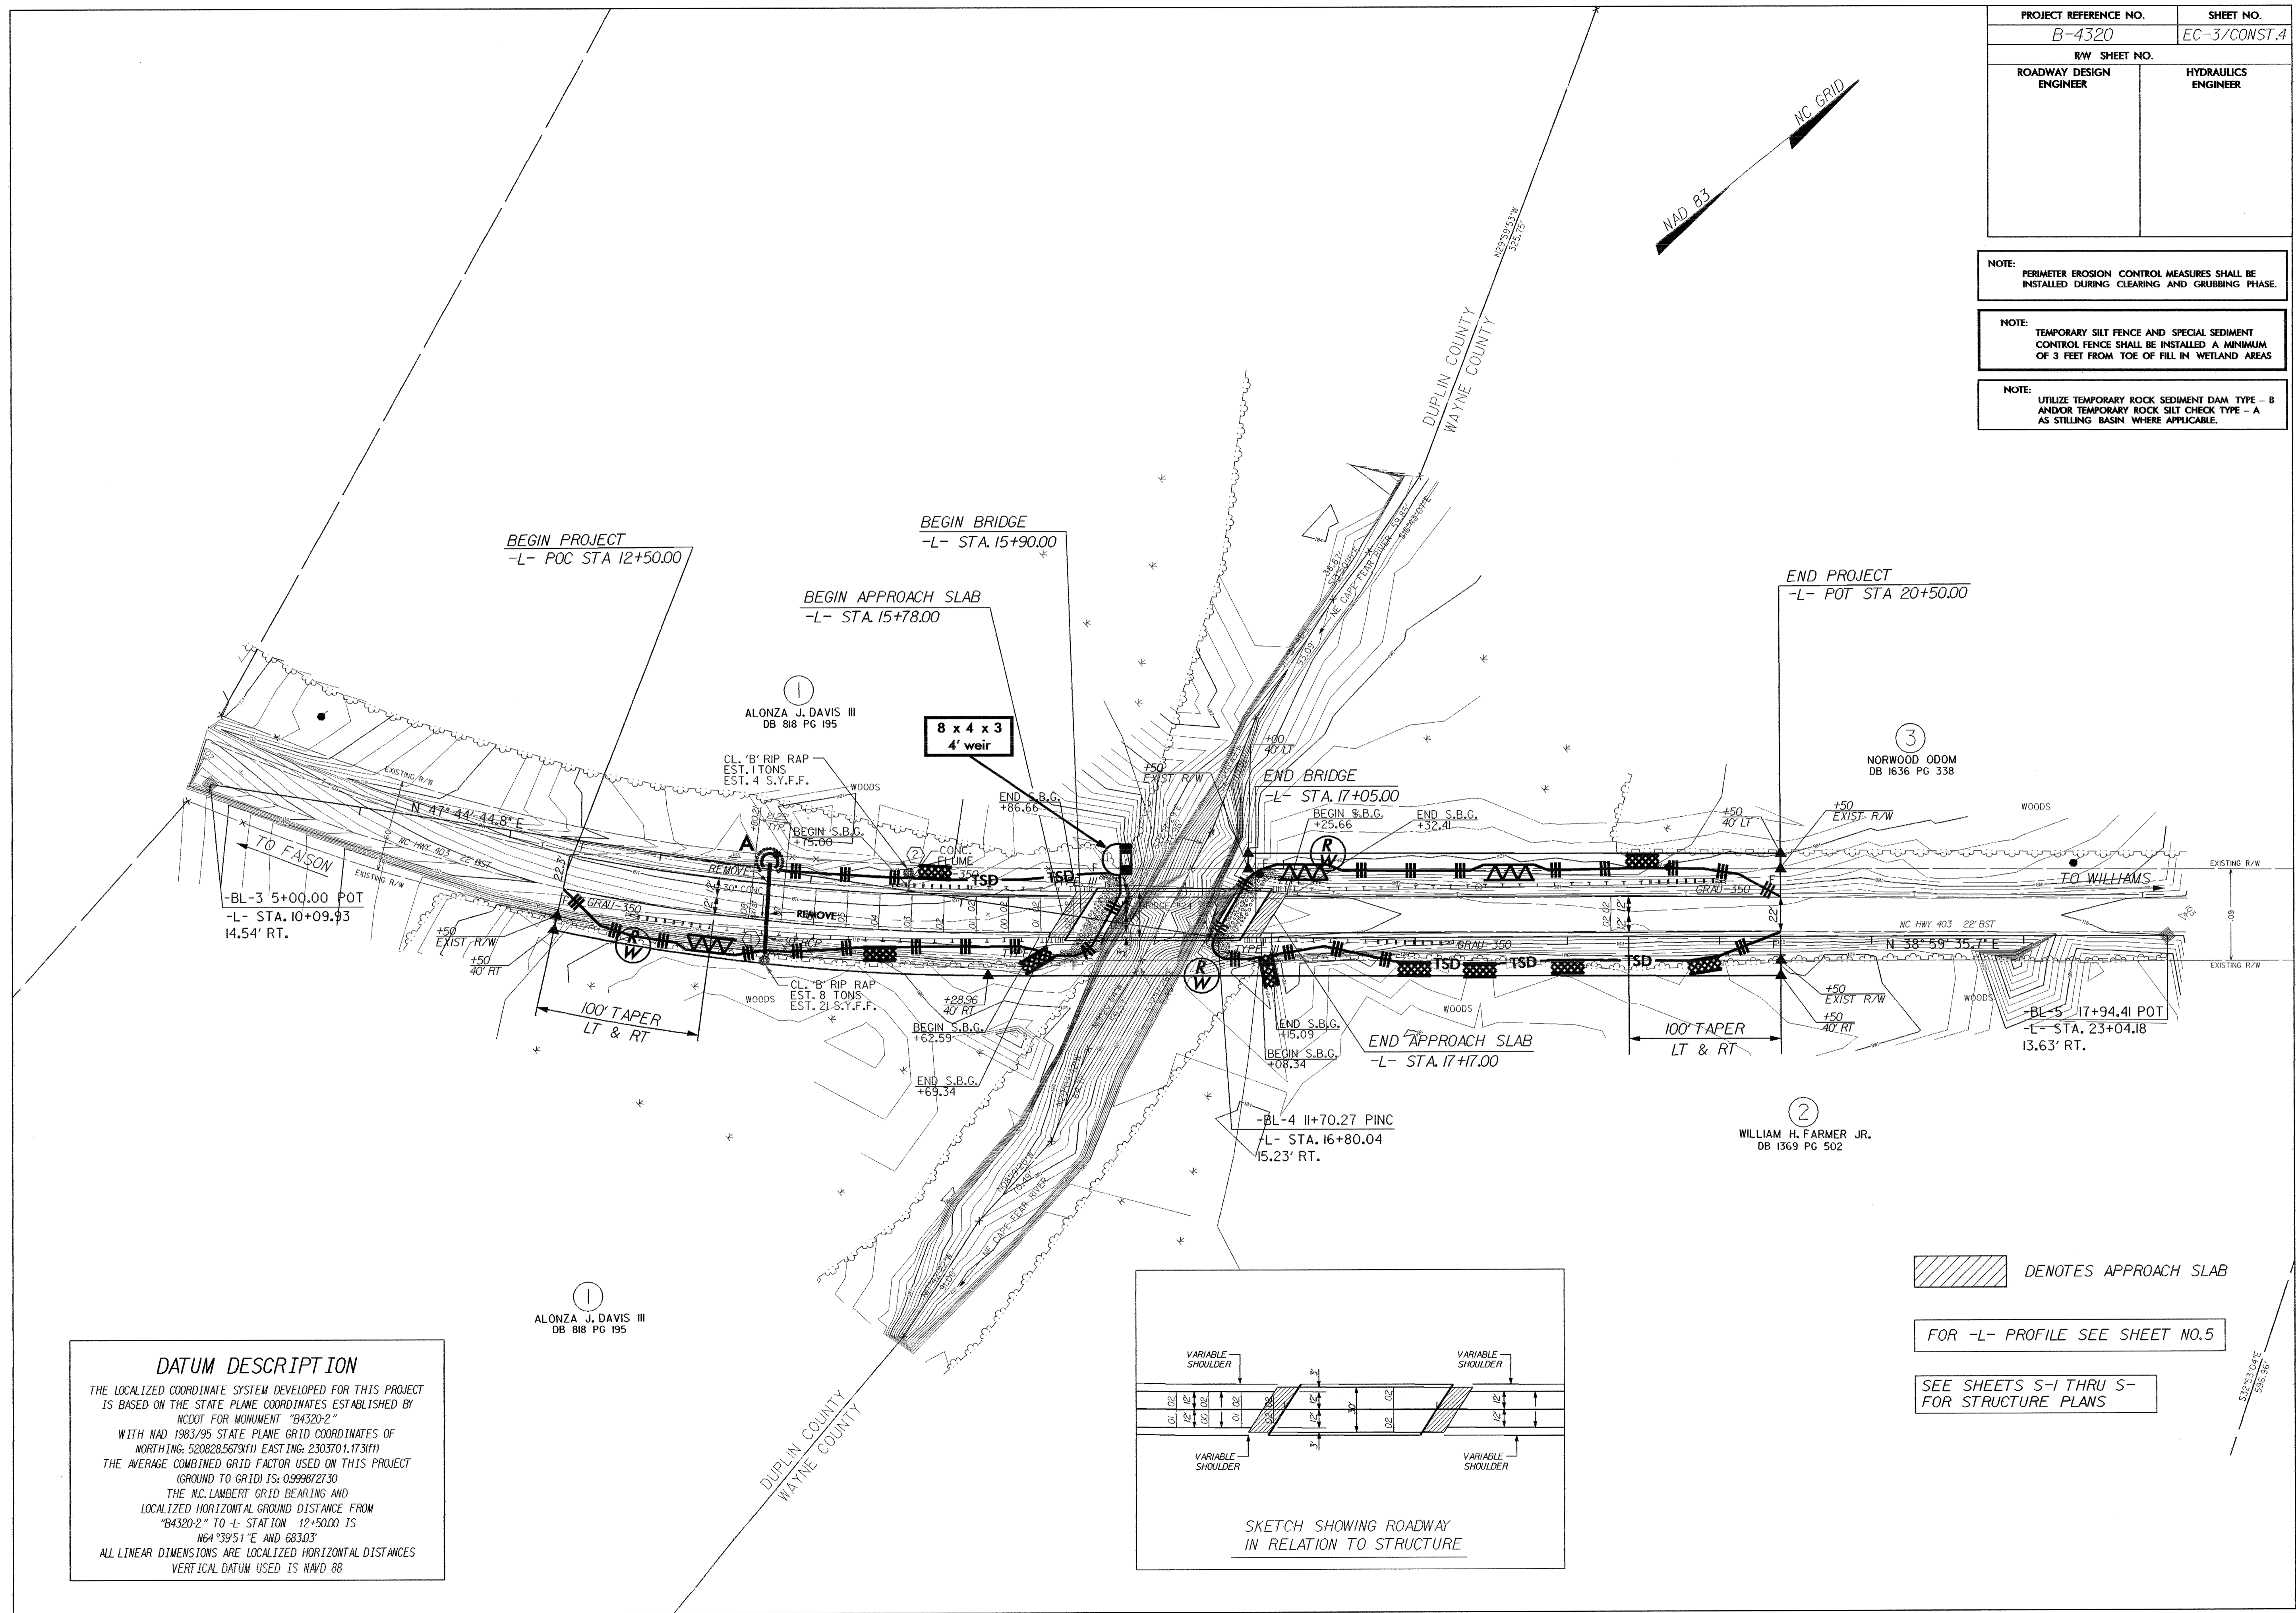

**DATUM DESCRIPTION**


THE LOCALIZED COORDINATE SYSTEM DEVELOPED FOR THIS PROJECT IS BASED ON THE STATE PLANE COORDINATES ESTABLISHED BY NCDOT FOR MONUMENT "B4320-2"

WITH NAD 1983/95 STATE PLANE GRID COORDINATES OF NORTHING: 520828.5679(1) EASTING: 2303701.1731(1)

THE AVERAGE COMBINED GRID FACTOR USED ON THIS PROJECT (GROUND TO GRID) IS: 0.999872730

THE N.C. LAMBERT GRID BEARING AND LOCALIZED HORIZONTAL GROUND DISTANCE FROM "B4320-2" TO -L- STATION 12+5000 IS N64°39'51"E AND 683.03'

ALL LINEAR DIMENSIONS ARE LOCALIZED HORIZONTAL DISTANCES VERTICAL DATUM USED IS NVD 88

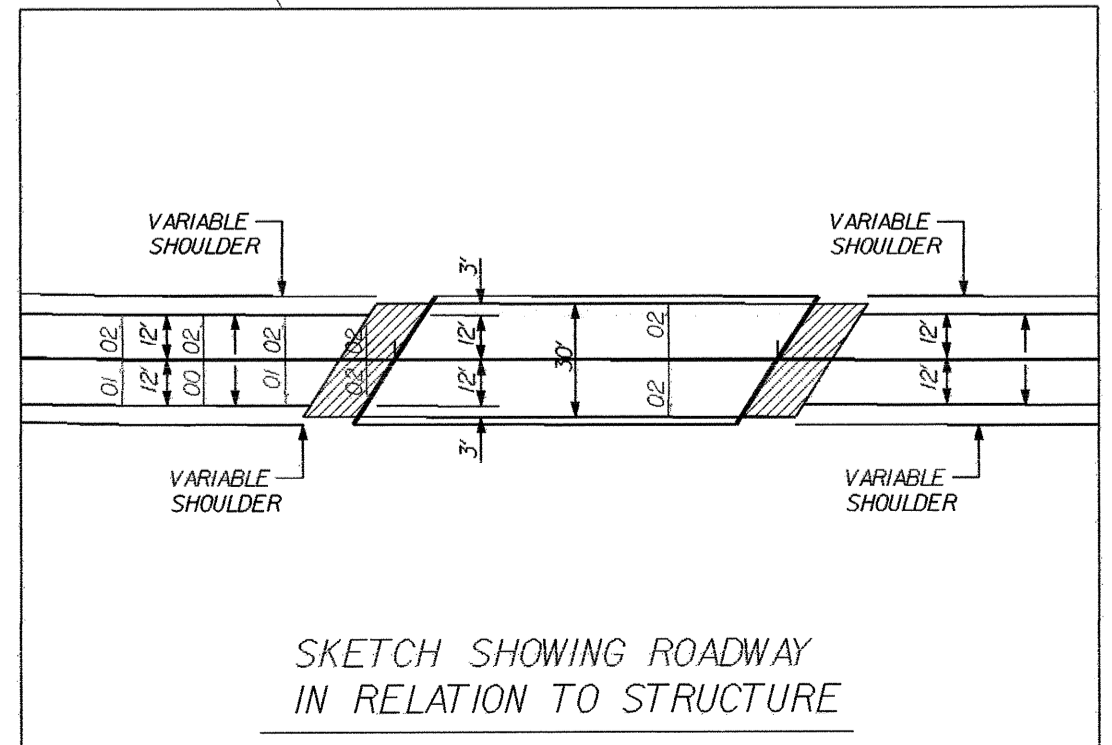

- DENOTES APPROACH SLAB
- FOR -L- PROFILE SEE SHEET NO.5
- SEE SHEETS S-1 THRU S- FOR STRUCTURE PLANS

DATE: 5/25/2016 5:06:36 PM