



FINAL PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1 1/4" ASPHALT CONC. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.
C2	PROP. APPROX. 2 1/2" ASPHALT CONC. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. IN EACH OF TWO LAYERS
E1	PROP. APPROX. 5 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5.5" IN DEPTH.
R1	CONCRETE SHOULDER BERM GUTTER
T	EARTH MATERIAL
U	EXISTING PAVEMENT

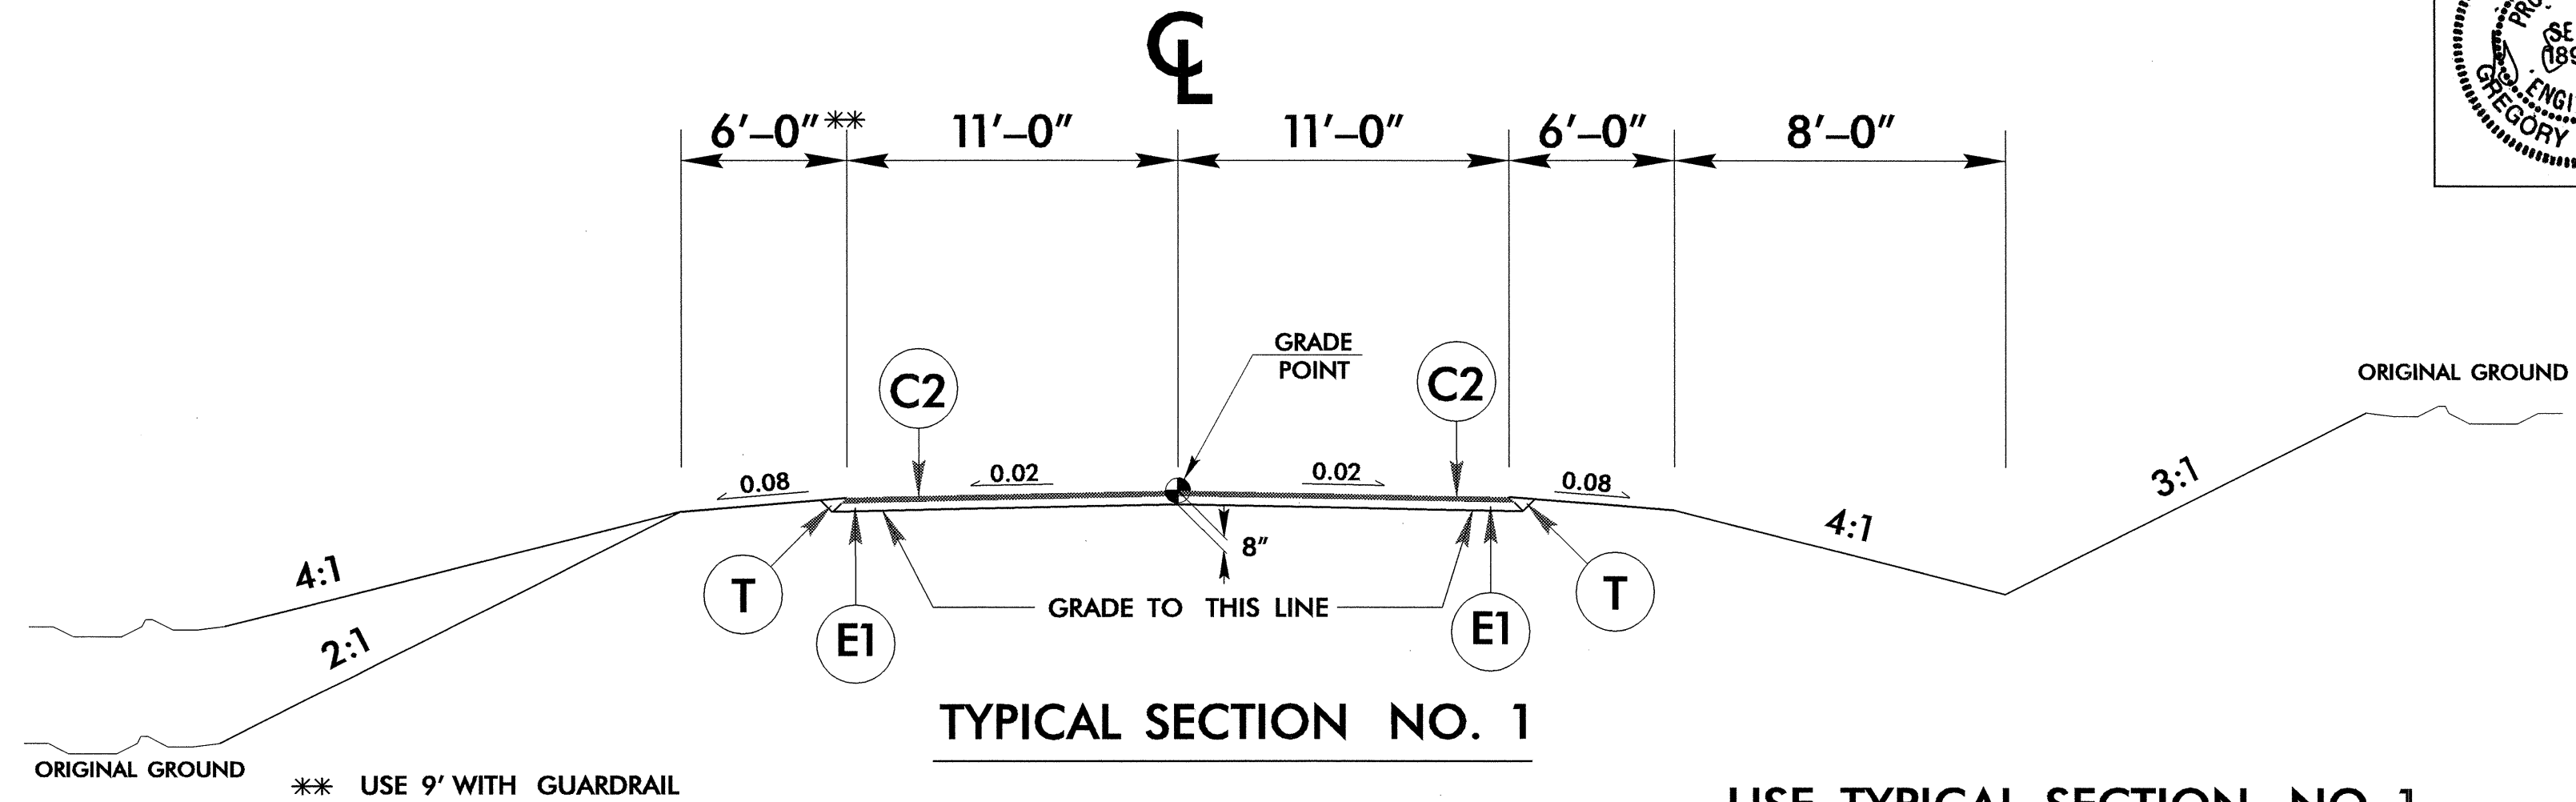

**USE TYPICAL SECTION NO. 1**


- L- FROM STA.11+40.00 TO STA.11+50.00, OVERLAY EXISTING WITH "C"
- L- FROM STA.11+50.00 TO STA.11+75.00, TRANSITION FROM EXISTING TO T.S.NO.1
- L- FROM STA.11+75.00 TO STA.14+25.00
- L- FROM STA.14+25.00 TO STA.14+50.00, TRANSITION FROM T.S.NO.1 TO EXISTING

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

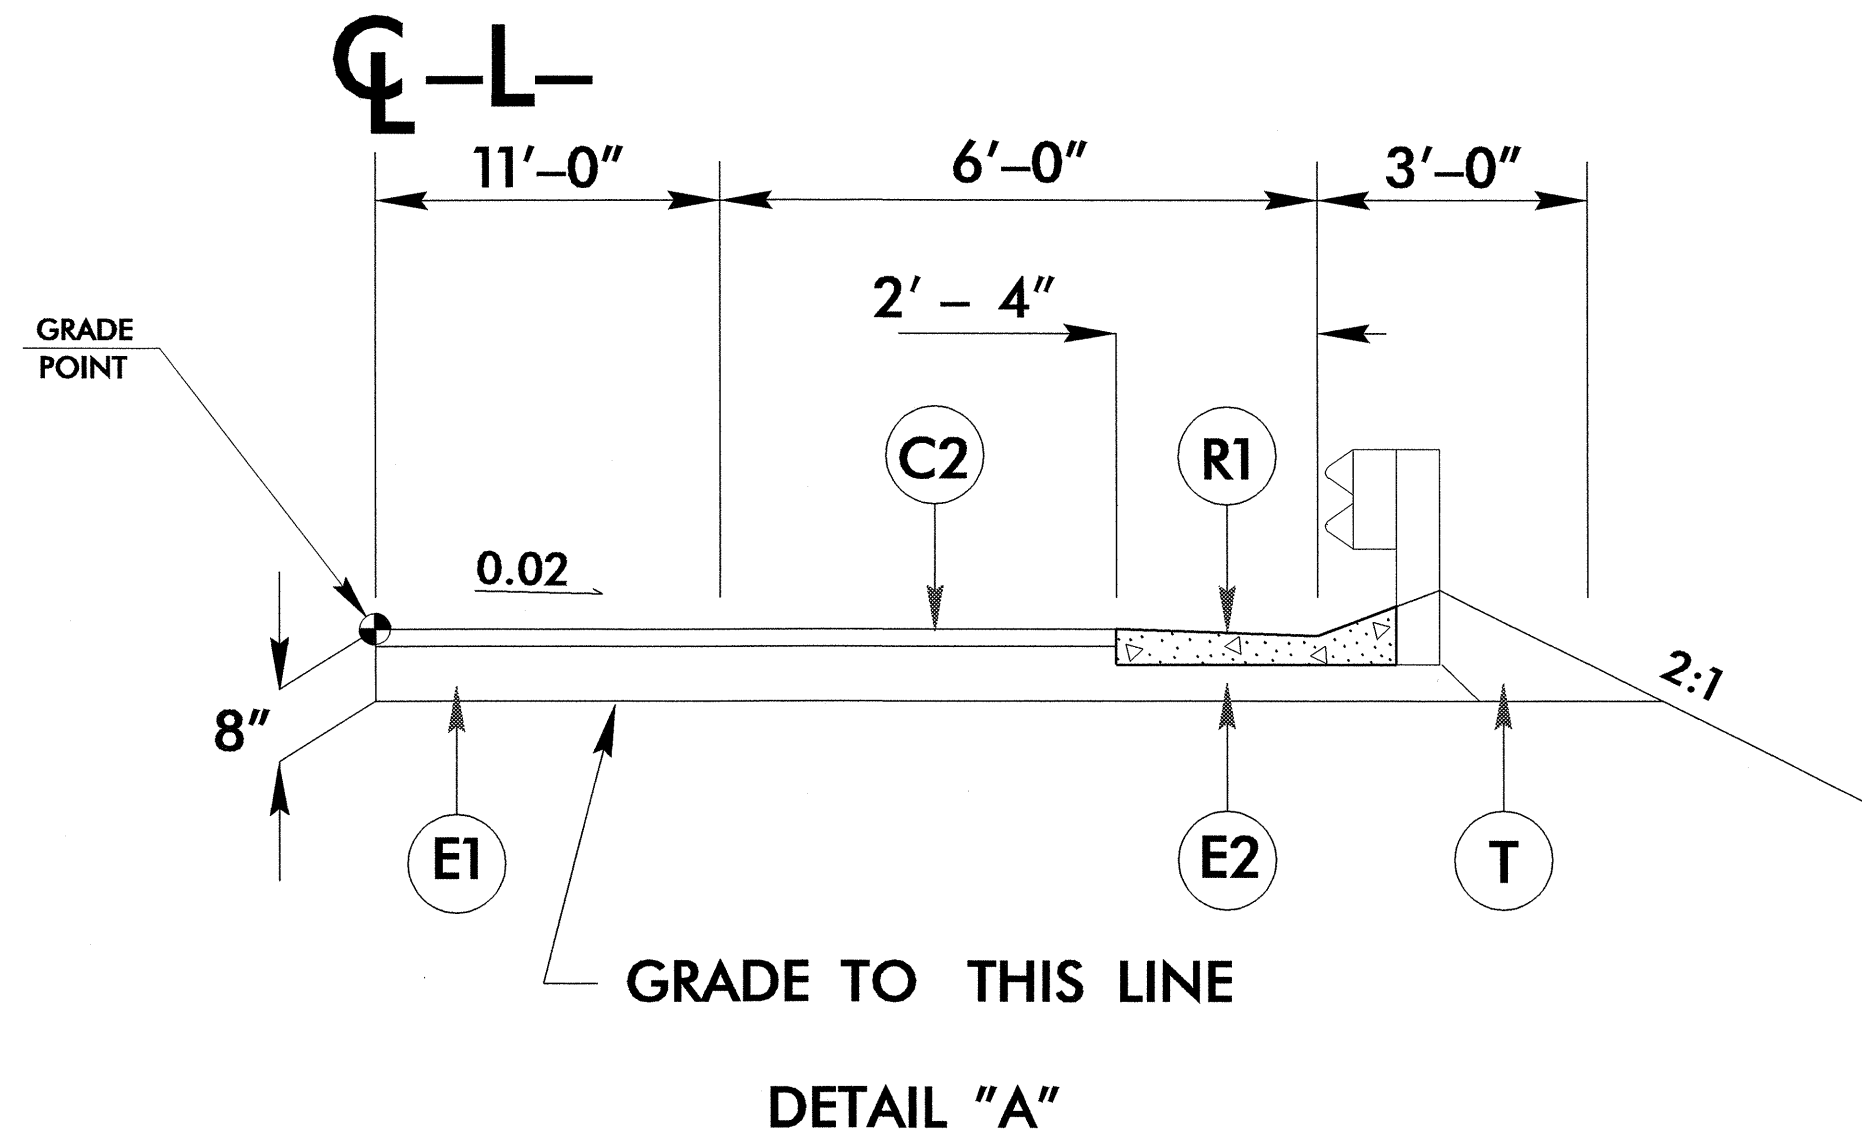

**USE DETAIL A IN CONJUNCTION WITH TYPICAL SECTION NO. 1**

- L- FROM STA.12+45.55 TO STA.13+09.00 (RIGHT SIDE)

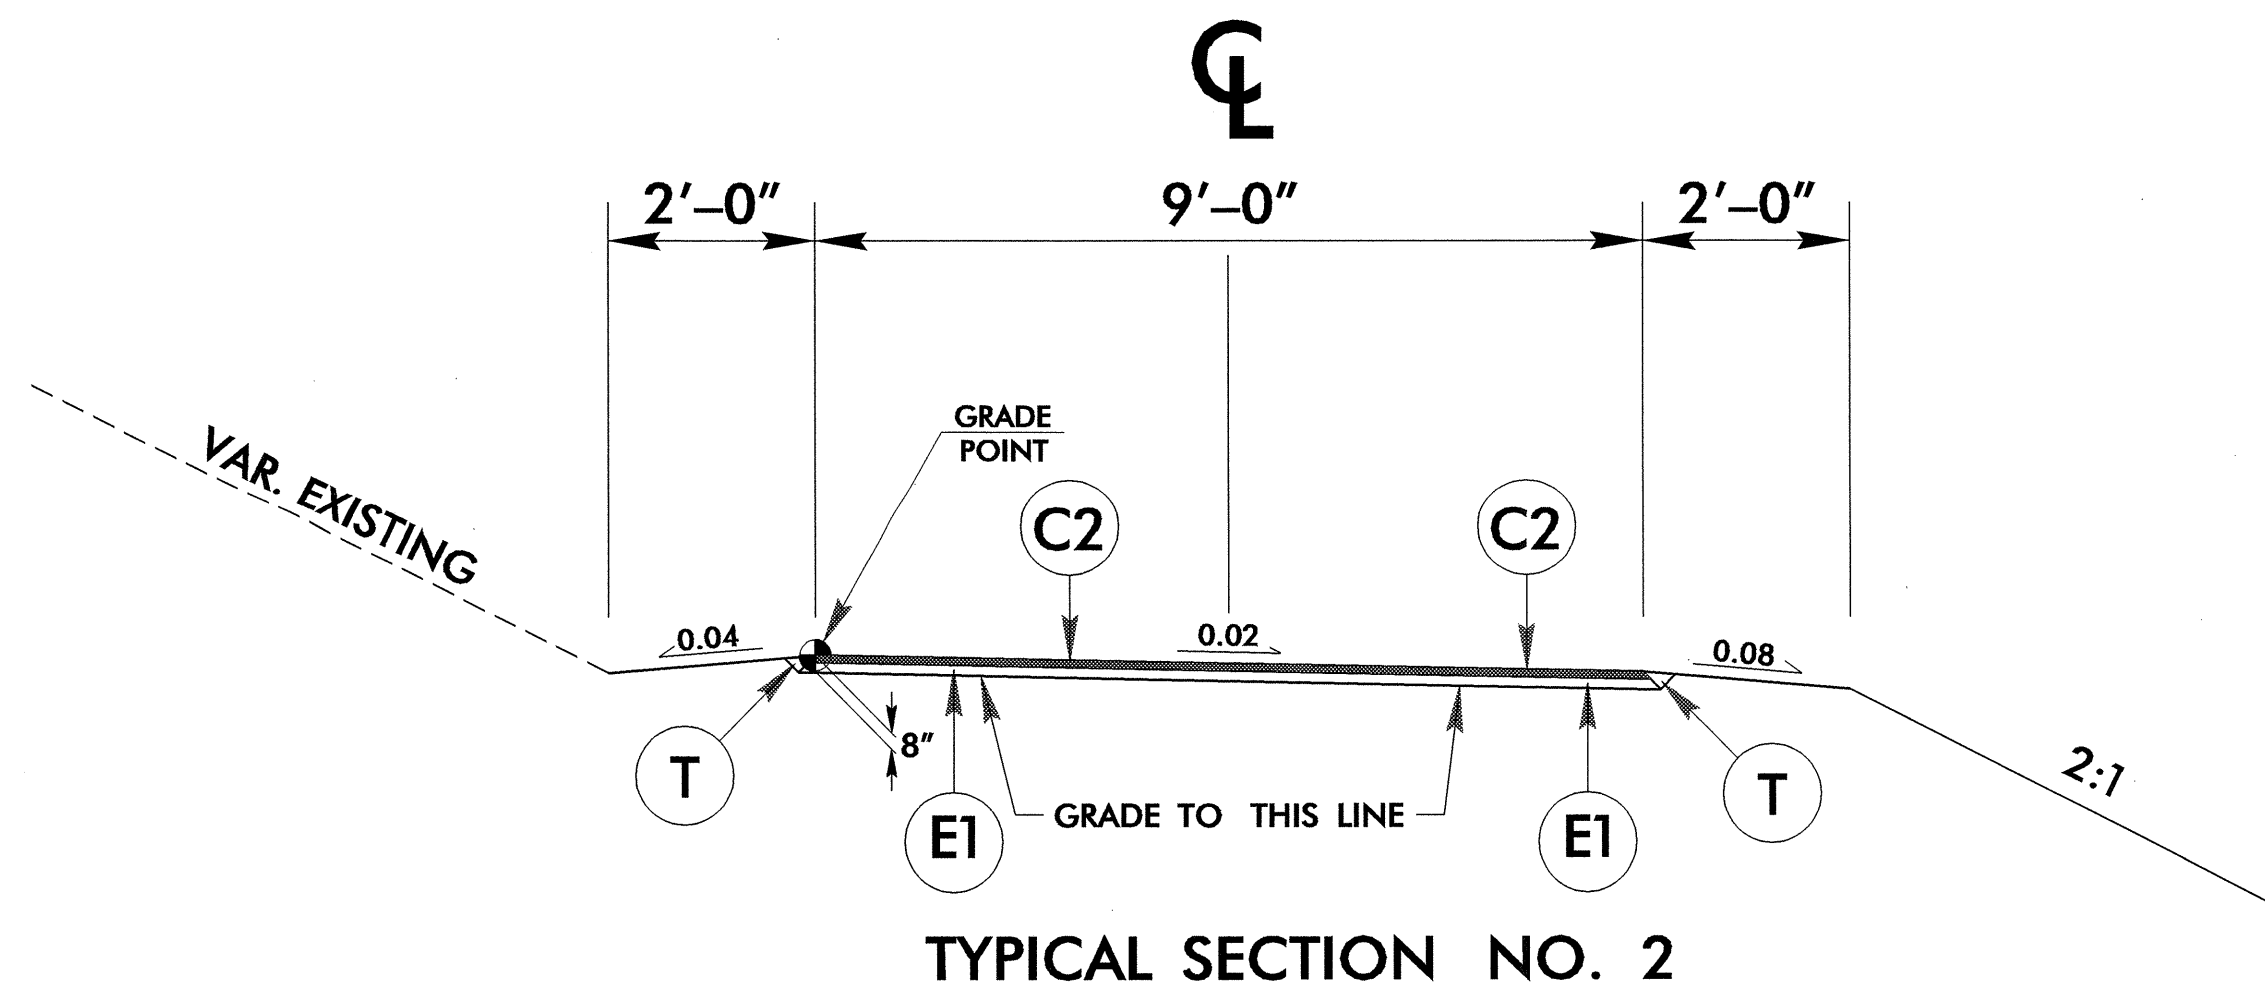

**USE TYPICAL SECTION NO. 2**

- DRIVEWAY- FROM STA.10+17.19 TO STA.10+61.33, TRANSITION FROM EDGE OF PAVEMENT OF -L- TO T.S.NO.2
- DRIVEWAY- FROM STA.10+61.33 TO STA.11+55.00