


PROJECT REFERENCE NO. B-3828	SHEET 2
ROADWAY DESIGN ENGINEER ANTHONY AARON HOUSER 2-21-05	PAVEMENT DESIGN ENGINEER ANTHONY AARON HOUSER 2-21-05


PAVEMENT SCHEDULE	
C1	PROP. APPROX. 2½" ASPHALT CONCRETE SURFACE COURSE TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
E1	PROP. APPROX. 5½" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
R	SHOULDER BERM GUTTER
T	EARTH MATERIAL.

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

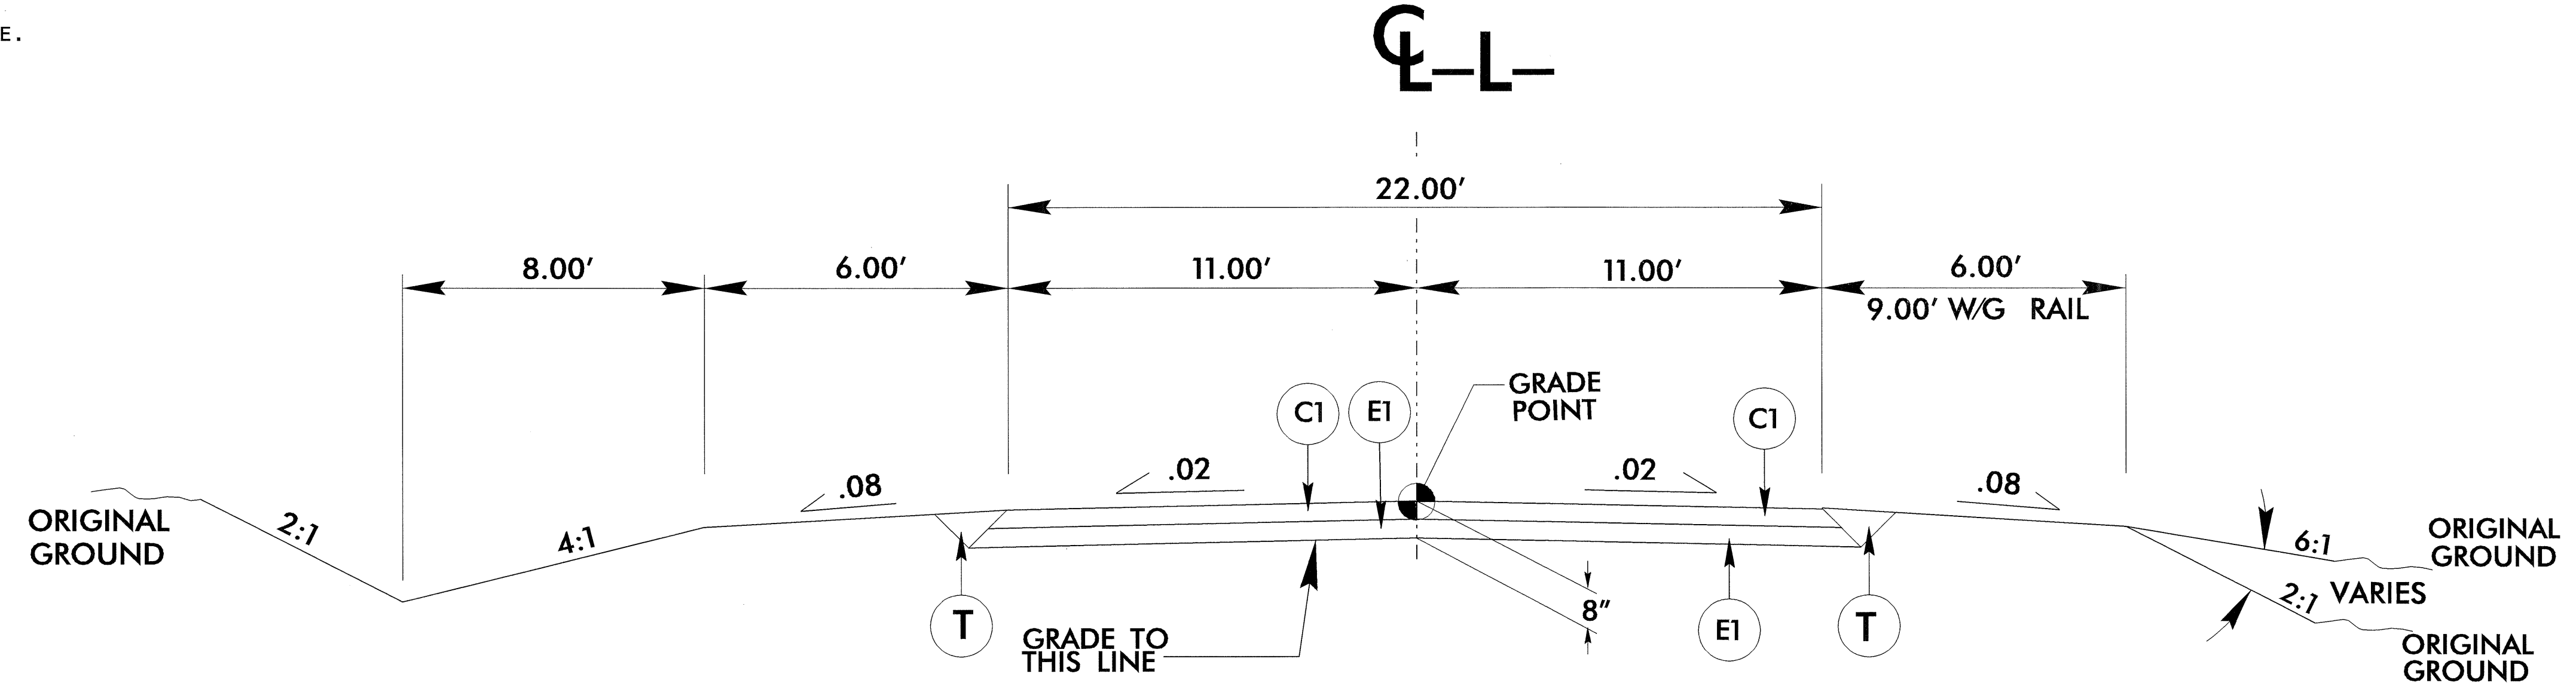

TYPICAL SECTION NO. 1

- USE TYPICAL SECTION NO. 1 FOR THE FOLLOWING:
- L- STA. 10+95.00 TO 11+95.00
Transition From Existing To Typical Section No. 1
 - L- STA. 11+95.00 TO 13+90.00 (Beg. Bridge)
 - L- STA. 15+40.00 (End Bridge) TO 17+00.00
 - L- STA. 17+00.00 To 18+00.00
Transition From Typical Section No. 1 To Existing

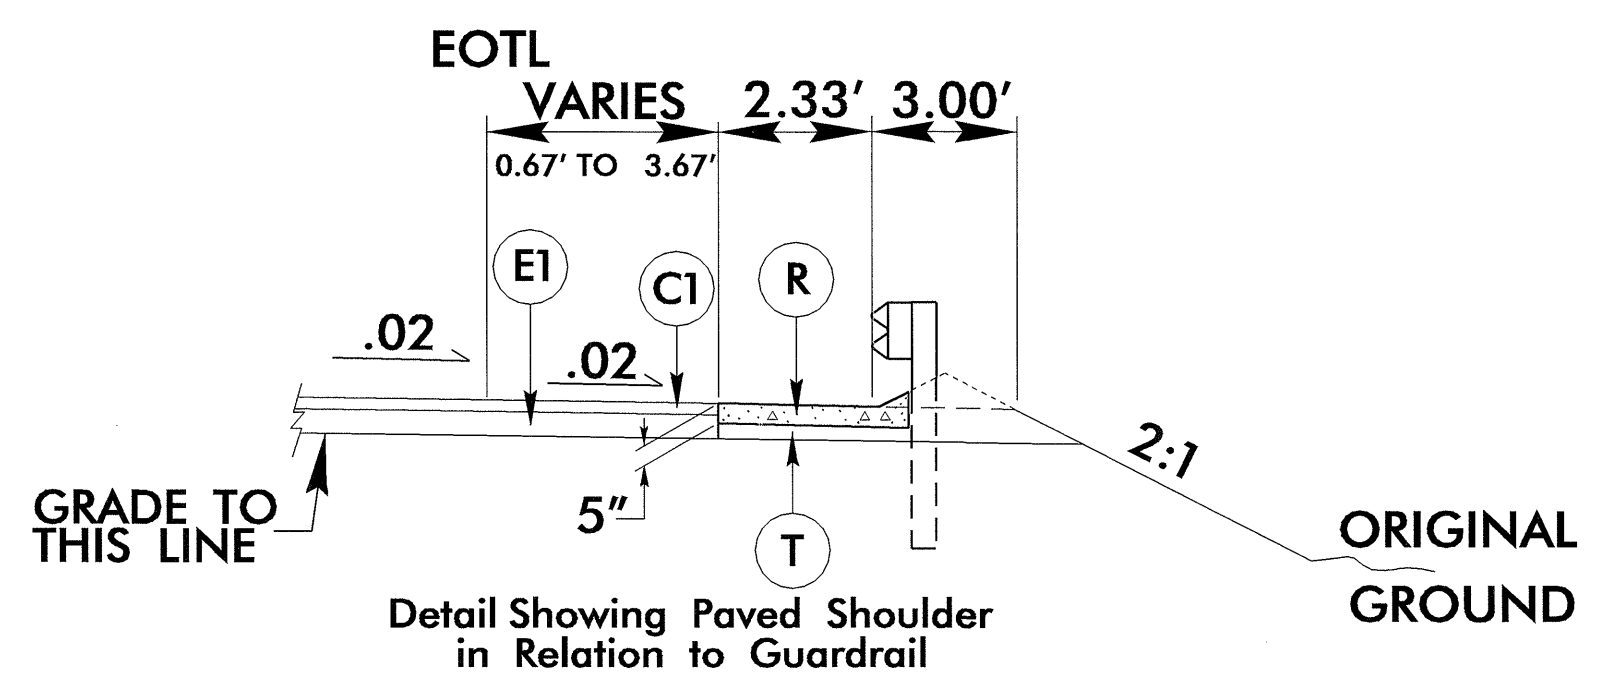

- USE SHOULDER BERM GUTTER FOR THE FOLLOWING:
- L- STA 12+72.75 TO -L- STA 13+66.00 LT (APPROACH SLAB)
 - L- STA 12+72.75 TO -L- STA 13+66.00 RT (APPROACH SLAB)
 - L- STA 15+64.00 (APPROACH SLAB) TO -L- STA 16+57.25 LT.