


STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

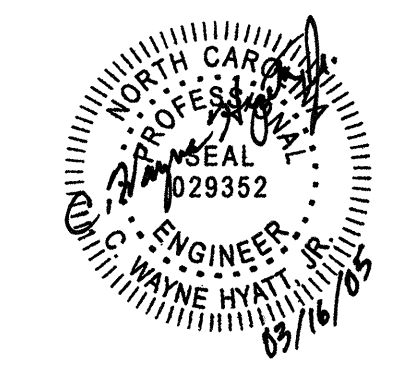

EFF. 01-15-02
REV. 11-23-04

TIP NO. B-3445 INDEX OF SHEETS

SHEET NO.	SHEET
1	TITLE SHEET
1-A	INDEX OF SHEETS, GENERAL NOTES, LIST OF STANDARD DRAWINGS
1-B	CONVENTIONAL SYMBOLS
2	PAVEMENT SCHEDULE, WEDGING DETAILS, TYPICAL SECTIONS
2-A	TEMPORARY PAVEMENT DETAIL, ROCK PLATING DETAIL, TYPICAL SECTIONS
2-B	UNDERCUT PLAN AND DETAILS
2-C	STANDARD TEMPORARY SHORING FOR MAINTENANCE OF TRAFFIC
2-D THRU 2-G	GUARDRAIL INSTALLATION DETAILS
2-H THRU 2-I	STRUCTURE ANCHOR DETAILS
3	SUMMARY OF QUANTITIES
3-A	EARTHWORK SUMMARIES
3-B	RIGHT-OF-WAY AREA DATA, PAVEMENT REMOVAL SUMMARY, LIST OF PIPES, ENDWALLS, ETC. (FOR PIPES 48" & UNDER), GUARDRAIL SUMMARY
4	PLAN AND PROFILE SHEET
5	PLAN VIEW SHOWING CROSS PIPE LOCATIONS
TCP-1 THRU TCP-8	TRAFFIC CONTROL PLANS
PM-1	PAVEMENT MARKING PLANS
EC-1 THRU EC-3	EROSION CONTROL PLANS
SIG-1 THRU SIG-5	SIGNAL PLANS
UO-1	UTILITIES BY OTHERS
X-0	CROSS SECTION SUMMARY
X-1 THRU X-9	CROSS SECTIONS
S-1 THRU S-43	STRUCTURE PLANS

GENERAL NOTES: 2002 SPECIFICATIONS
EFFECTIVE: 01-15-02
REVISED: 05-14-03

GRADING AND SURFACING OR RESURFACING AND WIDENING:

THE GRADE LINES SHOWN DENOTE THE FINISHED ELEVATION OF THE PROPOSED SURFACING AT GRADE POINTS SHOWN ON THE TYPICAL SECTIONS. WHERE NO GRADE LINES ARE SHOWN, THE PROFILES SHOWN DENOTE THE TOP ELEVATION OF THE EXISTING PAVEMENT ALONG THE CENTER LINE OF SURVEY ON WHICH THE PROPOSED RESURFACING WILL BE PLACED. GRADE LINES MAY BE ADJUSTED BY THE ENGINEER IN ORDER TO SECURE A PROPER TIE-IN.

CLEARING:

CLEARING ON THIS PROJECT SHALL BE PERFORMED TO THE LIMITS ESTABLISHED BY METHOD II.

THE CONTRACTOR'S ATTENTION IS DIRECTED TO THE AREAS IN THE PLANS DESIGNATED SAFETY CLEARING. THE LIMITS ARE AS SHOWN AND THE CLEARING AND GRUBBING IS CONSIDERED A PART OF THE LUMP SUM ITEM FOR "CLEARING AND GRUBBING".

SUPERELEVATION:

ALL CURVES ON THIS PROJECT SHALL BE SUPERELEVATED IN ACCORDANCE WITH STD. NO. 225.04 USING THE RATE OF SUPERELEVATION AND RUNOFF SHOWN ON THE PLANS. SUPERELEVATION IS TO BE REVOLVED ABOUT THE GRADE POINTS SHOWN ON THE TYPICAL SECTIONS.

SHOULDER CONSTRUCTION:

ASPHALT AND EARTH SHOULDER CONSTRUCTION ON THE HIGH SIDE OF SUPERELEVATED CURVES SHALL BE IN ACCORDANCE WITH STD. NO. 560.02.

GUARDRAIL:

THE GUARDRAIL LOCATIONS SHOWN ON THE PLANS MAY BE ADJUSTED DURING CONSTRUCTION AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHOULD CONSULT WITH THE ENGINEER PRIOR TO ORDERING GUARDRAIL MATERIAL.

TEMPORARY SHORING:

SHORING REQUIRED FOR THE MAINTENANCE OF TRAFFIC NOT SHOWN ON THE PLANS WILL BE PAID FOR AT THE CONTRACT PRICE FOR "TEMPORARY SHORING" OR "TEMPORARY SHORING-BARRIER SUPPORTED" DEPENDING UPON THE LOCATION OF THE SHORING.

END BENTS:

THE ENGINEER SHALL CHECK THE STRUCTURE END BENT PLANS, DETAILS, AND CROSS-SECTION PRIOR TO SETTING OF THE SLOPE STAKES FOR THE EMBANKMENT OR EXCAVATION APPROACHING A BRIDGE.

UTILITIES:

UTILITY OWNERS ON THIS PROJECT ARE:

- Dominion NC Power
- Verizon South
- Cox Communication (CATV)

ANY RELOCATION OF EXISTING UTILITIES WILL BE ACCOMPLISHED BY OTHERS.

RIGHT-OF-WAY MARKERS:

ALL RIGHT-OF-WAY MARKERS ON THIS PROJECT SHALL BE PLACED BY OTHERS.

ROADWAY ENGLISH STANDARD DRAWINGS

The following Roadway Standards as appear in "Roadway Standard Drawings" Highway Design Branch - N. C. Department of Transportation - Raleigh, N. C., Dated January 15, 2002 are applicable to this project and by reference hereby are considered a part of these plans:

STD. NO.	TITLE
DIVISION 2 - EARTHWORK	
200.02	Method of Clearing - Method II
225.02	Guide for Grading Subgrade - Secondary and Local
225.04	Method of Obtaining Superelevation - Two Lane Pavement
DIVISION 3 - PIPE CULVERTS	
300.01	Method of Pipe Installation - Method 'A'
DIVISION 5 - SUBGRADE, BASES AND SHOULDERS	
560.02	Method of Shoulder Construction - High Side of Superelevated Curve - Method II
DIVISION 6 - ASPHALT BASES AND PAVEMENTS	
654.01	Pavement Repairs
DIVISION 8 - INCIDENTALS	
820.04	Drain Installation in Shoulder Berm Gutter
840.00	Concrete Base Pad for Drainage Structures
840.18	Concrete Median Drop Inlet Type 'B' - 12" thru 36" Pipe
840.25	Anchorage for Frames - Brick or Concrete
840.27	Brick Median Drop Inlet Type 'B' - 12" thru 36" Pipe
840.29	Frames and Narrow Slot Flat Grates
840.35	Traffic Bearing Drop Inlet - for Cast Iron Double Frame and Grates
840.45	Precast Drainage Structure
840.46	Traffic Bearing Precast Drainage Structure
840.66	Drainage Structure Steps
846.01	Concrete Curb, Gutter and Curb & Gutter
882.01	Guardrail Placement
876.02	Guide for Rip Rap at Pipe Outlets

10/26/98
3/16/2005
P:\projects\060007\001-B3445\Plan\English\B3445.dgn