C	
-25520	
S	
N	
Ü	
R	
••	
1	
7	

CONTENTS:		SHEET NUMBERS		
LINE	STATION	PLAN	PROFILE	X-SECTS.
-L2-	108+53 to 109+60	4		
-14-	109+60LT to 118+80LT			70-87
	110+60RT to $112+40RT$	5		88-92
	114+40RT to 118+80RT		· · · · · · · · · · · · · · · · · · ·	93-99
		7-9		30-33
***************************************	118+80 to 126+50	9	37	
	126+50 to 127+60			100 100
	127+60 to 130+00	9,10	37	100–103
	130+00 to 133+40	10,11	<i>37,38</i>	**************************************
	133+40 to 134+40	11	38	104–105
	134+40 to 138+80	11-13	38,39	100 105
	138+80 to 140+60	13	39	106–107
	140+60 to 144+40	13,14	39	
	144+40 to 144+80	14	40	108
	144+80 to 158+55	14-18	40–42	
-L2LT-	108+57 to 109+24	4	28	
	109+24 to 118+71	<del>4</del> –7	28,30,32,33	70–87
	118+71 to 126+38	7–9	33,34,36	
-L2RT-	108+51 to 110+58	4	29	
	110+58 to 112+39	4,5	29,31	88-92
	112+39 to 114+41	5,6	31,32	
	114+41 to 118+80	6,7	32,33	81-87,93-99
	118+80 to 126+50	7–9	33,35,36	
-Y-	10+44 to 12+39	7	<i>43</i>	
-Y1-	11+15 to 13+25	8	<i>43</i>	
-Y2-	10+53 to $12+23$	10	44	
-Y3-	11+00 to 17+90	14,27	<del>4</del> 5	
-Y4-	5+90 to 13+80	19,20,23	46,47	
	13+80 to 15+80	13,20	<i>47,4</i> 8	109–111
	15+80  to  32+00    13-16	,19,20,24,25		
-Y4DET-	25+15 to 28+60	13,14	52	
-Y <i>5</i> -	10+09 to 16+13	13,20,21	<i>5</i> 3	
	16+13 to 16+55	13	53	112
	16+55 to 24+00	13-15	<i>53,54</i>	
-Y5DET-	10+03 to $11+24$	20	<i>55</i>	
-Y6-	10+17 to 15+40	20-22	55,56	
-Y7-	10+19 to 12+30	24,26	56,57	
_Y9_	11+90 to 15+11	21,22	57,58	
-FLYOVER-	0+00 to 16+69	11-15	<i>59–62</i>	
-RAMP A-	0+00 to 6+19	14-16	62-63	
	6+19 to 9+01	13,14	63	113-116
	9+01 to 10+40	13	63	117-118
	10+40 to 11+37	13	63,64	119-120
	11+37 to 12+58	13,20	64	
-RAMP B-	0+00 to 0+52	13	64	
	0+52 to 2+49	13	64	121-123
	2+49 to 6+33	12,13	64,65	
-LOOP B-	0+00 to 2+00	13,14	65	
	2+00 to 3+40	13	65	124-125
	3+40 to 5+48	14	65,66	
-RAMP C-	0+00 to 7+80	14-16	66,67	
	7+80 to 8+20	16	67	126
	8+20 to 8+63	16	67	
-LOOP C-	0+00 to 6+05	15	68	
	0+00 to 4+43	16	69	

NOTE: SEE SHEET 2A FOR PLAN SHEET LAYOUT AT TIME OF INVESTIGATION

## STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION **DIVISION OF HIGHWAYS** GEOTECHNICAL UNIT

## **ROADWAY** SUBSURFACE INVESTIGATION

. F.A. PROJ. **NHF-60-1(9)** \_\_ I.D. <u>**R-2552C**</u> STATE PROJ. 34459.1.1 COUNTY **JOHNSTON** PROJECT DESCRIPTION US 70 (CLAYTON BYPASS) FROM

EAST OF SR 1560 TO US 70 EAST OF CLAYTON

## INVENTORY



THESE PLANS ARE IN METE


		300. 200075
N.C.	R-2552C	1 176
STATE PROCESS.	RAPPOCHO.	DESCRIPTION
34459.1.1	NHF-60-1(9)	P.E.
34459.2.7		R.W. & UTIL.
34459.3.5		CONST.
		· · · · · · · · · · · · · · · · · · ·

## **CAUTION NOTICE**

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WAS MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN AND NOT FOR CONSTRUCTION OR PAY PLAPPOSES. THE VARIOUS FEED BORNING LOSS, ROCK CORES, AND SOL TEST DATA AVAILABLE HAY BE REVEWED OR RESPECTED IN RALEGISH BY CONTACTING THE N.C. DEPARTMENT OF TRANSPORTATION. GEOTERNACE, UNIT 0 18919 250-088, NOTINET BY SUBSURFACE PLANS AND REPORTS, NOR THE FELD BORNIG LOSS, ROCK CORES, OR SOL TEST DATA IS PART OF THE CONTRACT.

GENERAL SOM. AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEDTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARLY REFLECT THE ACTUAL SUBSURFACE CONCITIONS BETWEEN BORROSS OR BETWEEN SAMPLED STRATA WITHIN THE BORROHACE. THE LABORATORY SAMPLE DATA AND THE IN SITU IN-PLACED TEST DATA CAN BE RELEGO ON ONLY TO THE DEGREE OF RELIABILITY INFERENT IN THE STANDARD TEST NETHOD. THE OBSERVED WATER LEVELS OR SOLD MOSTLED CONCINTON SINCATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOL MOSTLINE CONDITIONS OF THE CONSISTING CORORDING TO CLUMING STANDARD THE STANDARD THE STANDARD THE STANDARD THE SUBSURFACE NOT SOLD MOSTLINE CONDITIONS MAY VARY CONSISTERATE WHITH TIME ACCORDING TO CLUMING CONDITIONS MAY VARY CONSISTERATE WHITH TIME ACCORDING TO CLUMING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS,

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS THE BODER OR CONTRACTOR IS CAUTONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMBARY ONLY AND IN MANY CASES THE FRAIL DESIGN DETAILS ARE DEFERENT, FOR BODING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR THAL DESON HORDALATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR QUARANTE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE OR OPENION OF THE DEPARTMENT AS TO THE TIPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISTY HINSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THIS PROJECT. THE CONTRACTOR SHALL HAVE NO CLAM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONTIONS TO BE INCOUNTERED AT THE SITE DEFERRING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

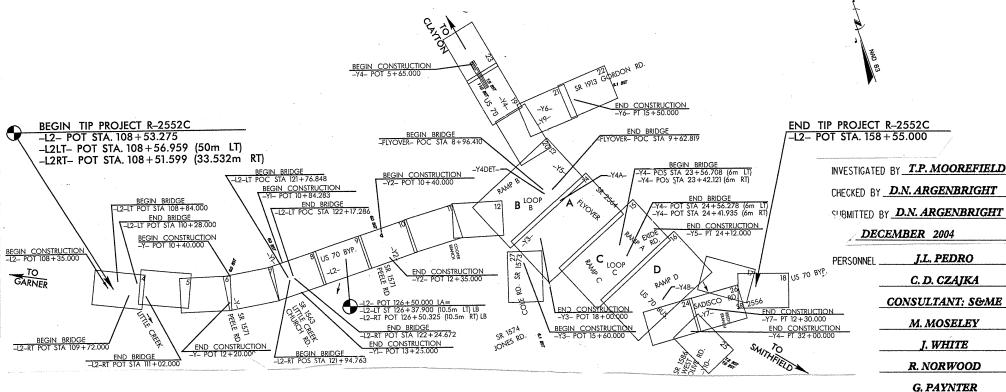

CHECKED BY D.N. ARGENBRIGHT SUBMITTED BY D.N. ARGENBRIGHT

J.L. PEDRO


C. D. CZAJKA CONSULTANT: S&ME

M. MOSELEY

J. WHITE

R. NORWOOD

G. PAYNTER



NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IT IS CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.

NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INCICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.