



PROJECT REFERENCE NO. B-4266	SHEET NO. 2
RW SHEET NO.	
ROADWAY DESIGN ENGINEER SEAL 14493 JAMES STAFFORD GOODRICH	PAVEMENT DESIGN ENGINEER SEAL 22896 CLARK S. MORRISON

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 2 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 275 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
E1	PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
U	EXISTING PAVEMENT.
T	EARTH MATERIAL.
J	PROP. 8" AGGREGATE BASE COURSE.



ALL PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

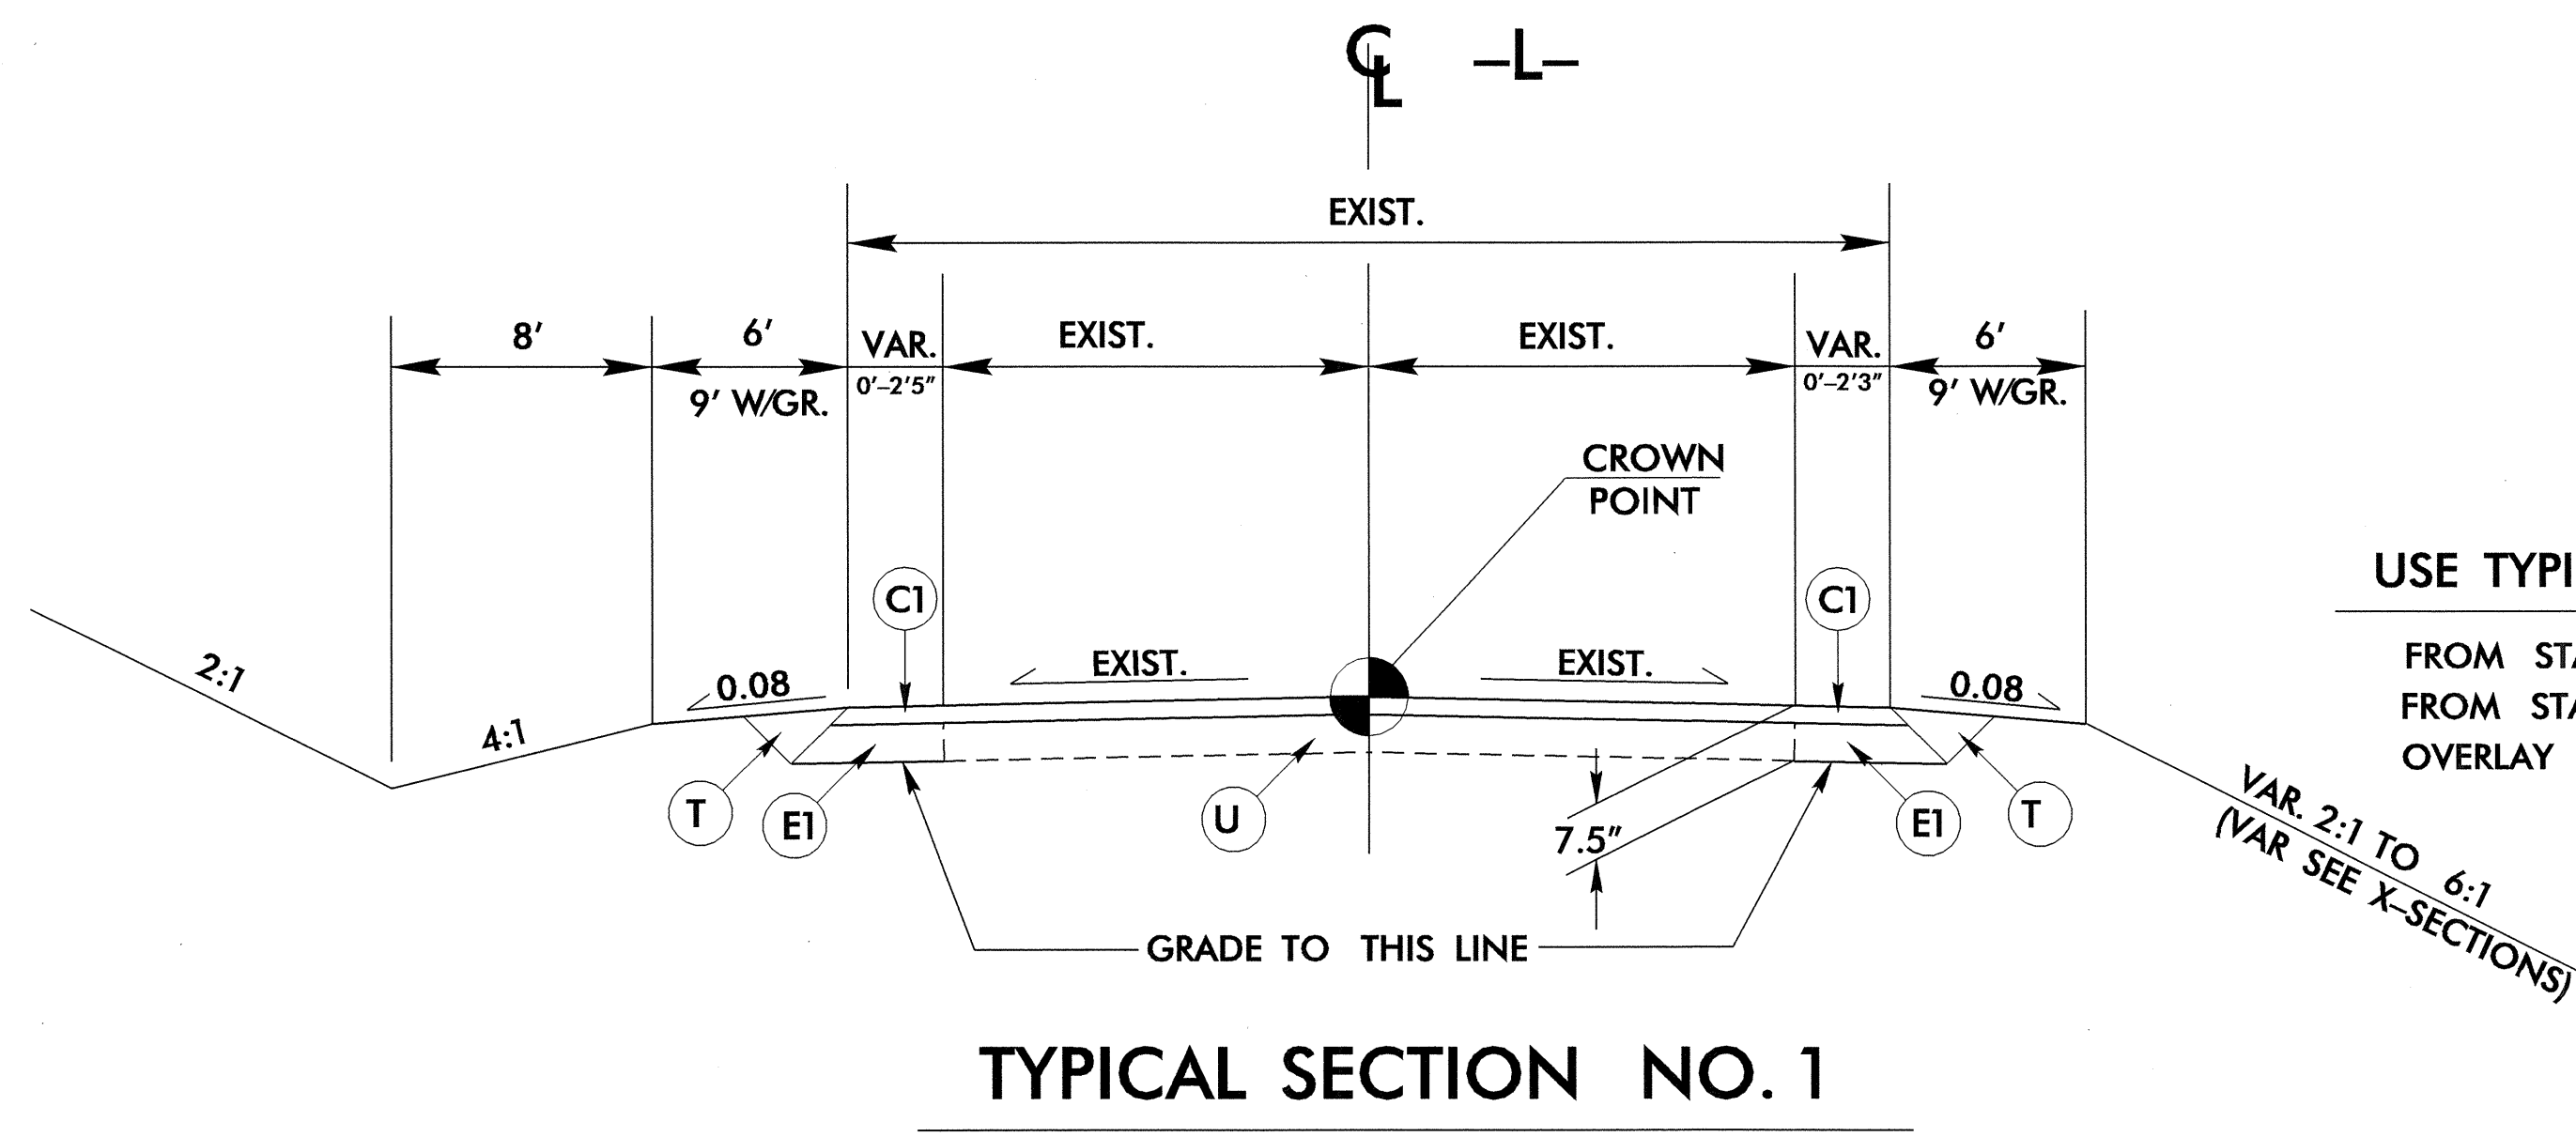

USE TYPICAL NO. SECTION NO. 1
FROM STA. 9+38 TO 12+50 AND
FROM STA. 14+07.39 TO 17+57
OVERLAY EXIST. PAV'MT WITH 1 1/4" (SF9.5A)

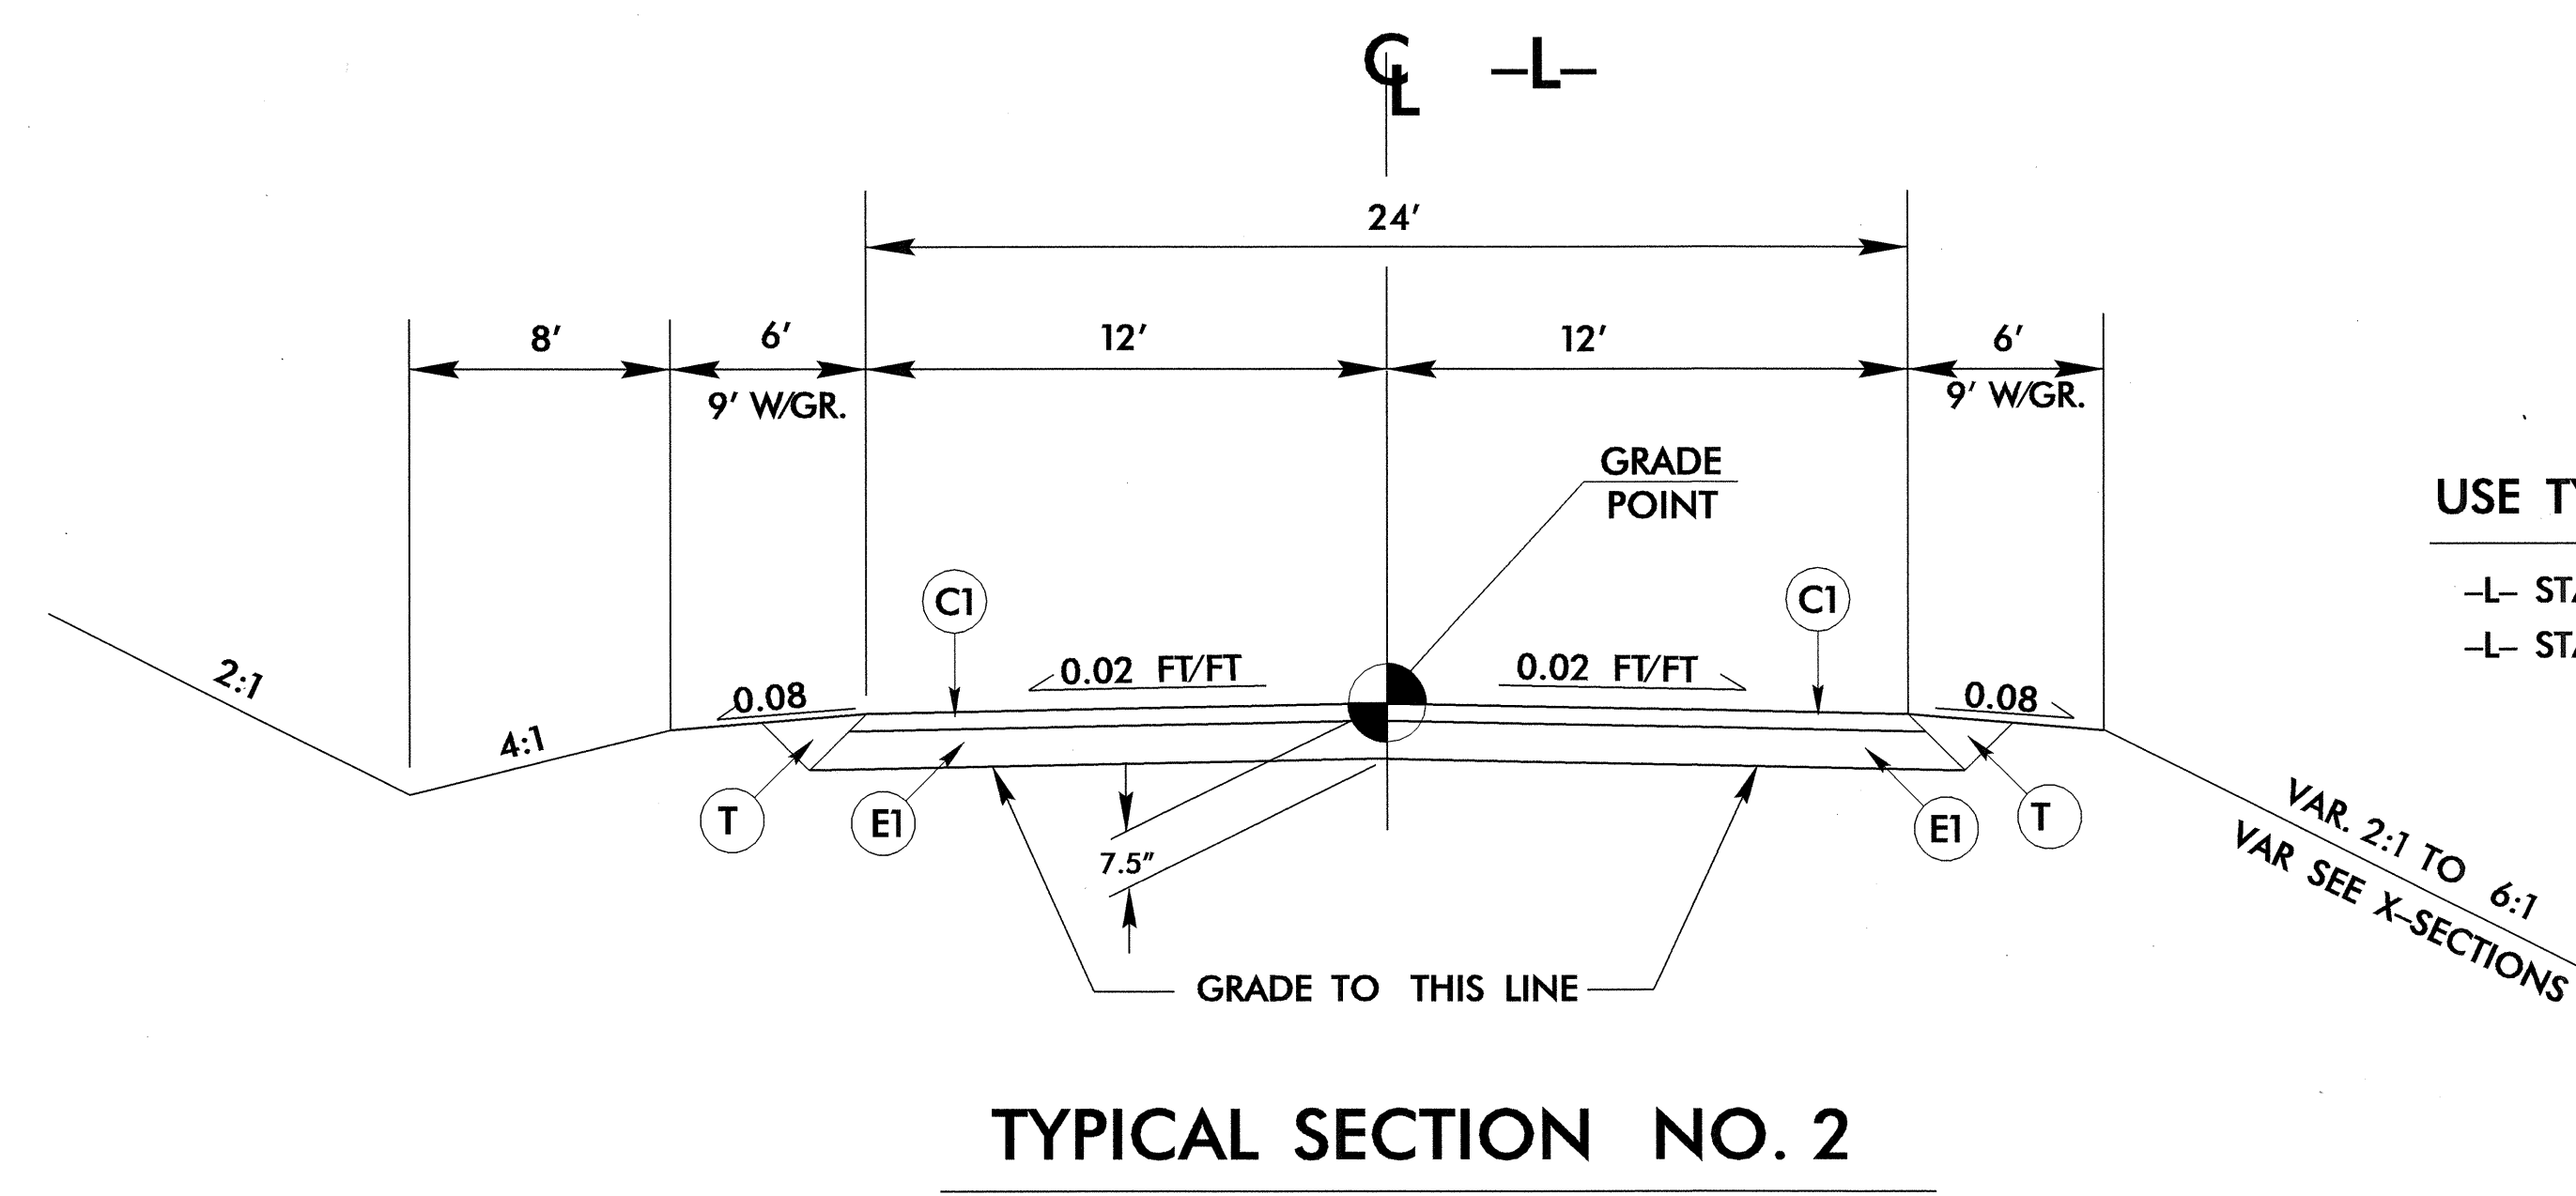

USE TYPICAL NO. SECTION NO. 2
-L- STA. 12+50 TO 12+79
-L- STA. 13+79 TO 14+07.39

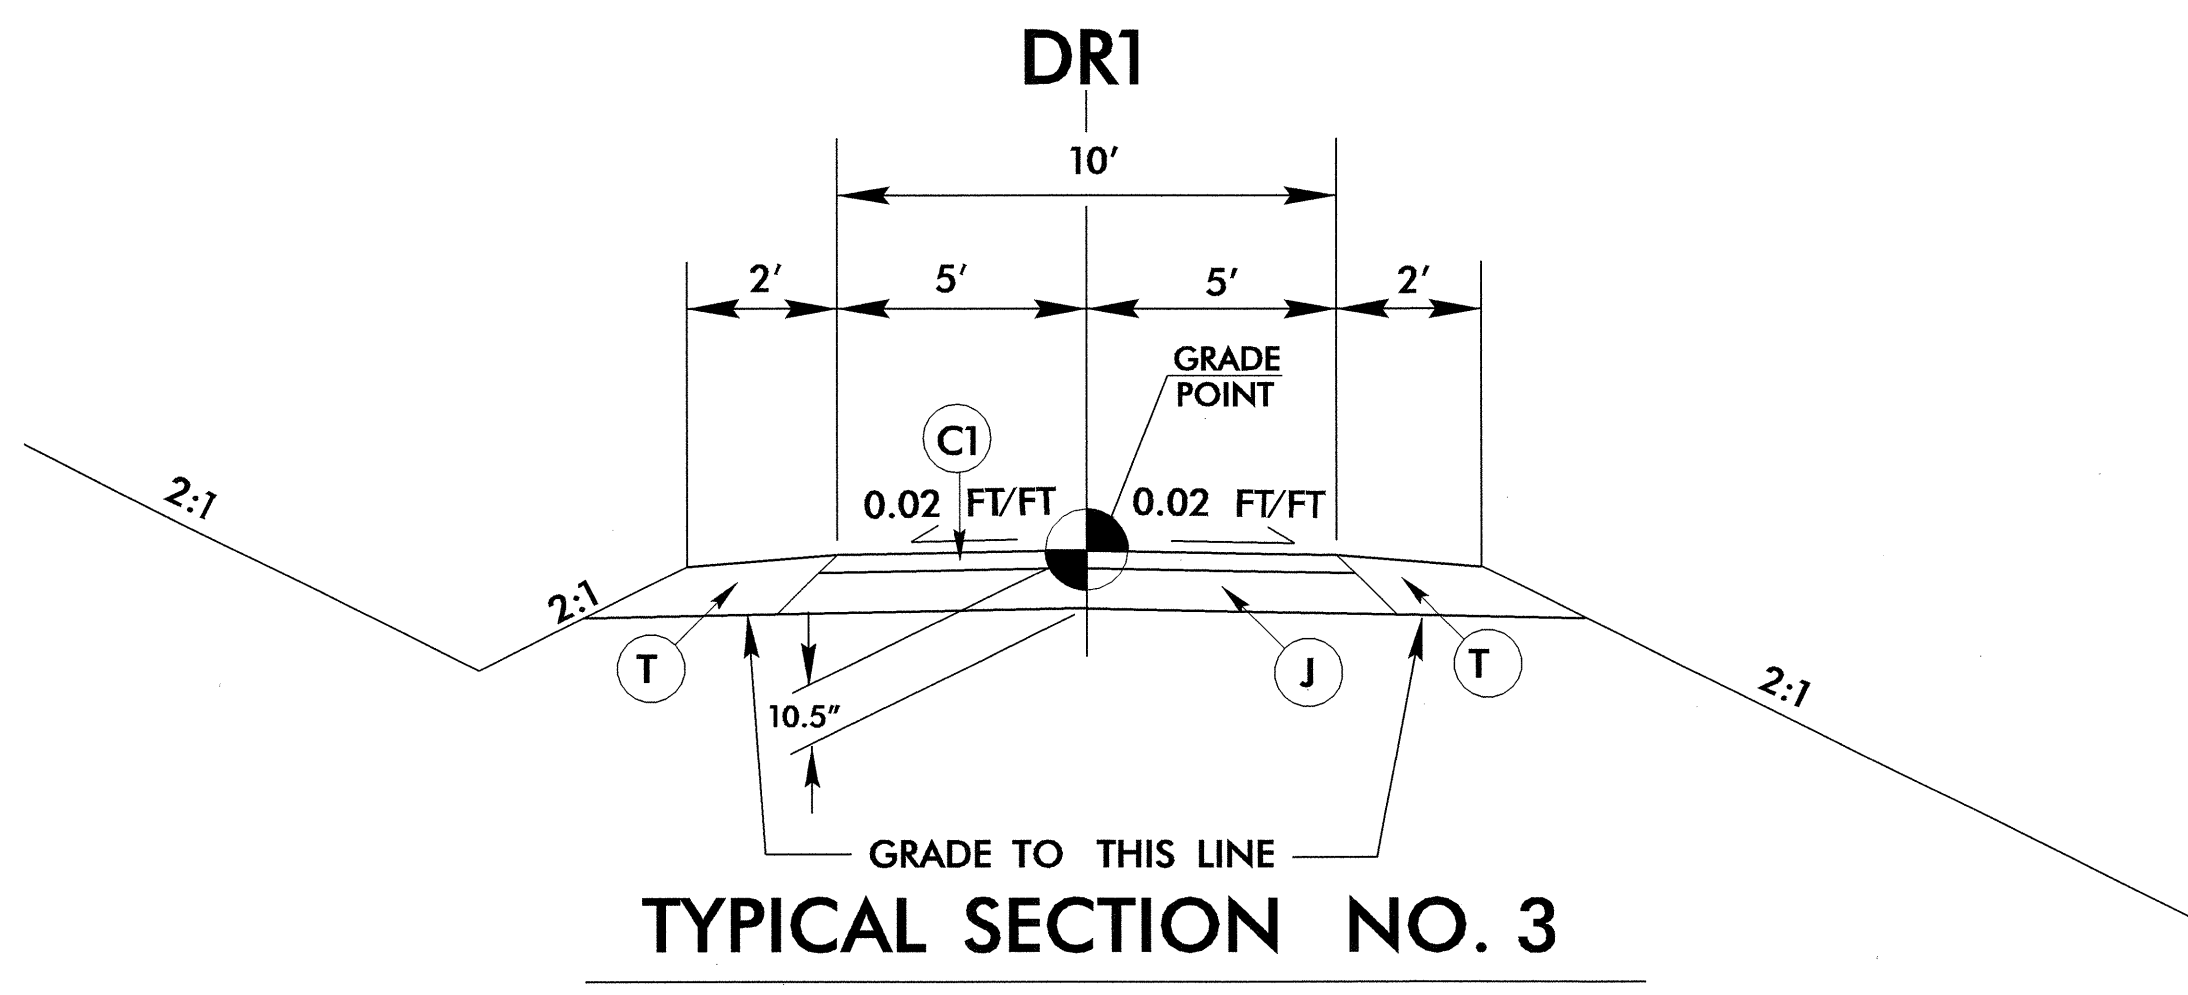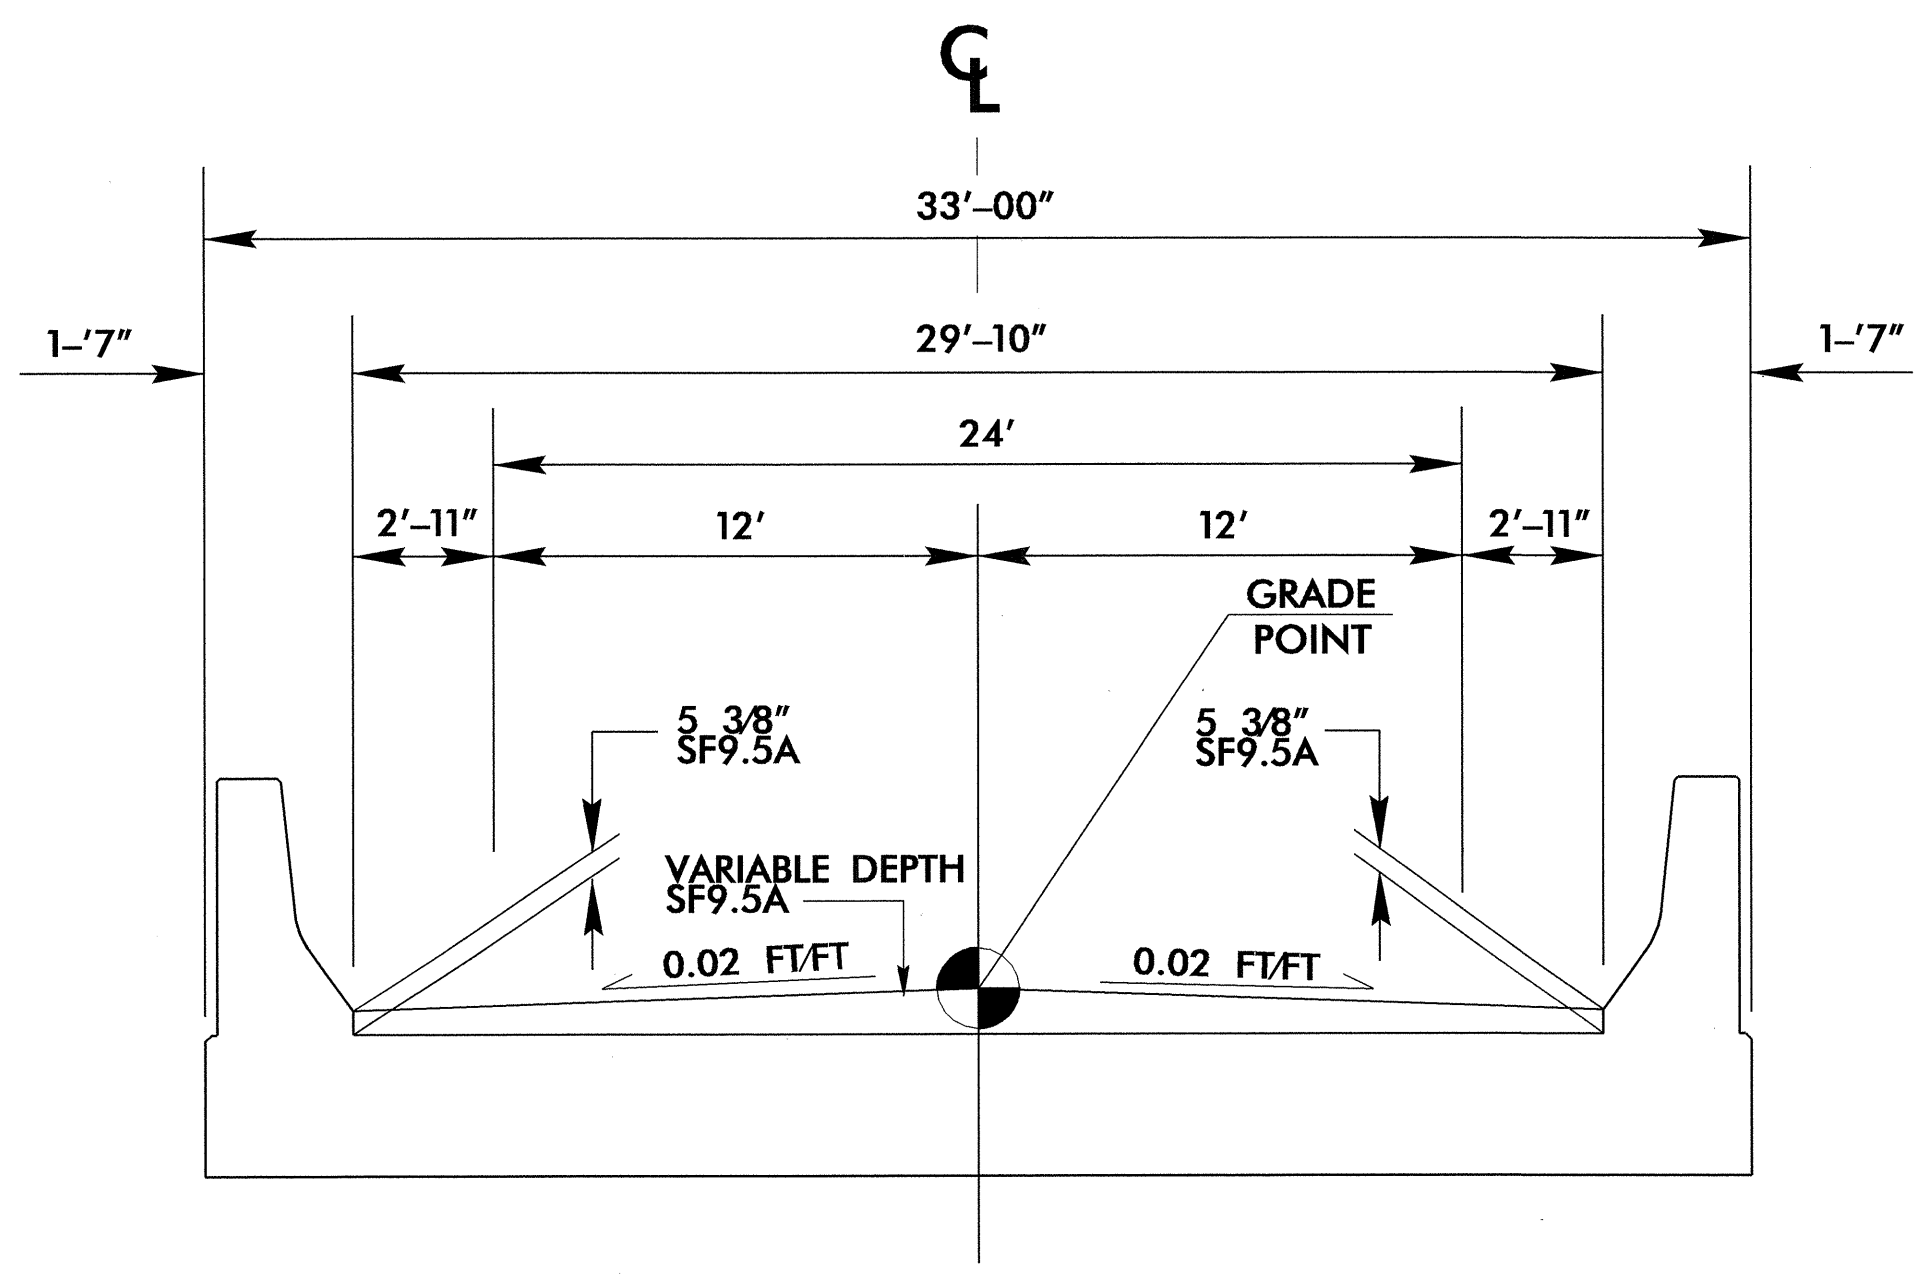

USE TYPICAL NO. SECTION NO. 3
FROM STA. 10+50 TO 13+06.33