WBS Elements: 9CR.10301.4, 9CR.10341.4, 9CR.20301.4, 9CR.20341.4, 9CR.303409.4, 9CR.303418.4, 9CR.303423.4 & 9CR.303428.4 See to the Left

PROJ. REFERENCE NO. SHEET NO. TCP-3

TRANSPORTATION

P

DEPT

PF

HIGHWAYS

OF.

DIVISION

IGNS

S

WARNING

NO

WORK

'IDED

UNDIV

-WAY

1W0

FOR


DRAWING

DETAIL

ပ ż


RALEIGH,



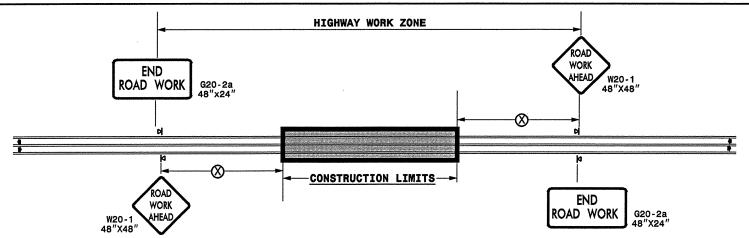


	RECOMMENDED Minimum Sign Spacing
POSTED SPEED LIMIT (M.P.H.)	⊗
≤ 50	500'
≥ 55	1000'

## ROADWAYS INTERSECTING ALONG 2 WAY UNDIVIDED WORK ZONE (Y-LINES)

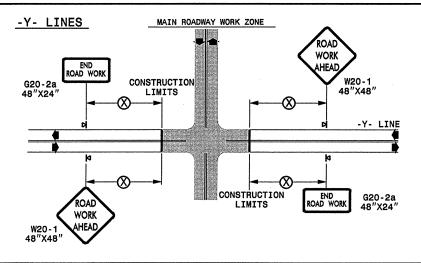


## GENERAL NOTES

- USE FLUORESCENT ORANGE SHEETING (TYPE VII OR HIGHER) ON ALL ADVANCED WORK ZONE SIGNS.
- DO NOT INSTALL ADVANCE WARNING SIGNS MORE THAN 3 DAYS PRIOR TO BEGINNING OF WORK.
- ALL SIGN SPACING DIMENSIONS ARE APPROXIMATE, FIELD ADJUST AS NECESSARY OR AS DIRECTED.
- USE PORTABLE WORK ZONE SIGNS ONLY WITH PORTABLE WORK ZONE SIGN STANDS SPECIFICALLY DESIGNED FOR ONE ANOTHER. PORTABLE WORK ZONE SIGNS MAY BE ROLL UP OR APPROVED COMPOSITE.
- PROVIDE PORTABLE WORK ZONE SIGN STANDS, PORTABLE SIGNS AND SIGN SHEETING WHICH ARE LISTED ON THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION'S APPROVED PRODUCT LIST OR ACCEPTED AS TRAFFIC QUALIFIED BY THE TRAFFIC CONTROL UNIT.
- \*\* TWO-WAY UNDIVIDED ADVANCE WARNING SIGN CONFIGURATION MAY BE USED ON URBAN MULTI-LANE FACILITIES WHERE CONDITIONS LIMIT THE USE OF DUAL MOUNTED SIGNS AS DETERMINED BY THE ENGINEER.



SHEET 1 OF 1



OHOLNESS "
 The read of the

DETAIL DRAWING FOR TWO-WAY UNDIVIDED ADVANCED WORK ZONE WARNING SIGNS					
NONE	OHOLNESS !!	REVISIONS			
		7-98	10/01		
Y:		10-98	03/04		
BY:		01/01	11/04		
FD BY:	To the manual of	CADD	***************************************		