

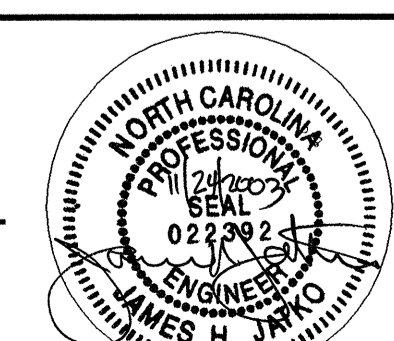
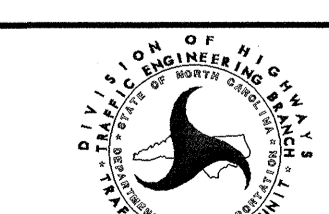


PROJ. REFERENCE NO.	SHEET NO.
R-2514A	PM-1

FINAL PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY BREAKDOWN	TOTAL QUANTITY
PAVEMENT MARKING LINES			
		THERMOPLASTIC (100MM, 2.3 MM)	
TA	WHITE EDGELINE	20650 M	
TB	YELLOW EDGELINE	19050 M	
		TOTAL	39700 M
		THERMOPLASTIC (100MM, 3.1 MM)	
TC	3 M. WHITE SKIP	4963 M	
TD	0.5 M. WHITE MINISKIP	147 M	
TE	WHITE SOLID LANE LINE	2390 M	
TI	YELLOW DOUBLE CENTER	1180 M	
		TOTAL	8680 M
		THERMOPLASTIC (200MM, 2.3 MM)	
TQ	WHITE DIAGONAL	83 M	
TT	YELLOW DIAGONAL	178 M	
		TOTAL	261 M
		THERMOPLASTIC (600MM, 3.1 MM)	
T2	WHITE STOPBAR	112 M	
		TOTAL	112 M
THERMOPLASTIC PAVEMENT MARKING SYMBOLS (2.3 MM)			
UA	LEFT TURN ARROW	70 EA	
UB	RIGHT TURN ARROW	25 EA	
UC	STRAIGHT ARROW	36 EA	
UD	COMBO. STRAIGHT/LEFT	8 EA	
UE	COMBO. STRAIGHT/RIGHT	4 EA	
		TOTAL	143 EA
SNOWPLOWABLE RAISED PAVEMENT MARKERS			
ME	YELLOW & YELLOW	25 EA	
MF	CRYSTAL & RED	1164 EA	
		TOTAL	1189 EA

24-NOV-2003 09:31
C:\CAD\2003\4001\R-2514A\TrafficControl\TC\PM01.dgn
DUNN AT DUNN

APPROVED:	DATE:	FINAL PAVEMENT MARKING QUANTITIES	
	SCALE:	NONE	
	DATE:	11/18/03	
	DWG. BY:	KWD	
	DESIGN BY:	KWD	
	REVIEWED BY:	JHJ	
		REVISIONS	
		CARD NO. R-2514A TC PM01.DGN	