

	RECOMMENDED Minimum Sign Spacing
POSTED SPEED LIMIT (M.P.H.)	8
≤ 50	500′
\ EE	1000/

TRANSPORTATION NORTH CAROLINA OF. OF.

HIGHWAYS 9F DIVISION STATE DEPT.

IDED

UNDIV

-WAY

OML

FOR

DRAWING

DETAIL

GN

S

WARNIN

NO

Ż


RALEIGH,

ROADWAYS INTERSECTING ALONG 2 WAY UNDIVIDED WORK ZONE (Y-LINES)

END

ROAD WORK

G20-2a 48"X24"

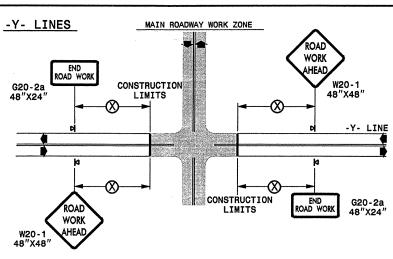

GENERAL NOTES

- USE FLUORESCENT ORANGE SHEETING (TYPE VII OR HIGHER) ON ALL ADVANCED WORK ZONE SIGNS.
- DO NOT INSTALL ADVANCE WARNING SIGNS MORE THAN 3 DAYS PRIOR TO BEGINNING OF WORK.

END

ROAD WORK

- ALL SIGN SPACING DIMENSIONS ARE APPROXIMATE, FIELD ADJUST AS NECESSARY OR AS DIRECTED.
- USE PORTABLE WORK ZONE SIGNS ONLY WITH PORTABLE WORK ZONE SIGN STANDS SPECIFICALLY DESIGNED FOR ONE ANOTHER. PORTABLE WORK ZONE SIGNS MAY BE ROLL UP OR APPROVED COMPOSITE.

CONSTRUCTION LIMITS-


- PROVIDE PORTABLE WORK ZONE SIGN STANDS, PORTABLE SIGNS AND SIGN SHEETING WHICH ARE LISTED ON THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION'S APPROVED PRODUCT LIST OR ACCEPTED AS TRAFFIC QUALIFIED BY THE TRAFFIC CONTROL UNIT.
- ** TWO-WAY UNDIVIDED ADVANCE WARNING SIGN CONFIGURATION MAY BE USED ON URBAN MULTI-LANE FACILITIES WHERE CONDITIONS LIMIT THE USE OF DUAL MOUNTED SIGNS AS DETERMINED BY THE ENGINEER.

LEGEND PORTABLE SIGN

DIRECTION OF TRAFFIC FLOW

NONE

SHEET 1 OF 1



NO INSTANTA
CONTROL

DETAIL DRAWING FOR TWO-WAY UNDIVIDED ADVANCED WORK ZONE WARNING SIGNS REVISIONS 7-98 10/01 10-98 03/04 01/01 11/04