



PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1¼" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 138 LBS. PER SQ. YD.
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C3	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C4	VARIOUS RATES OF I19.0B AND B25.0B TO ACHIEVE PROPER SUPERELEVATION AS DIRECTED BY THE ENGINEER.
C5	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D1	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
M1	WEDGE MILLING FROM A DEPTH OF 0.00" TO A DEPTH OF 1½" BELOW THE CURB LINE AS DIRECTED BY THE ENGINEER.
M2	MILLING AT AN AVERAGE DEPTH OF 4.5" AS DIRECTED BY THE ENGINEER.
M3	MILLING AT AN AVERAGE DEPTH OF 1.50" FOR BRIDGE APPROACHES AND DEPARTURES AS DIRECTED BY THE ENGINEER.
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.

PROJECT #	SHEET NO.
6CR.10261.16, ETC.	9

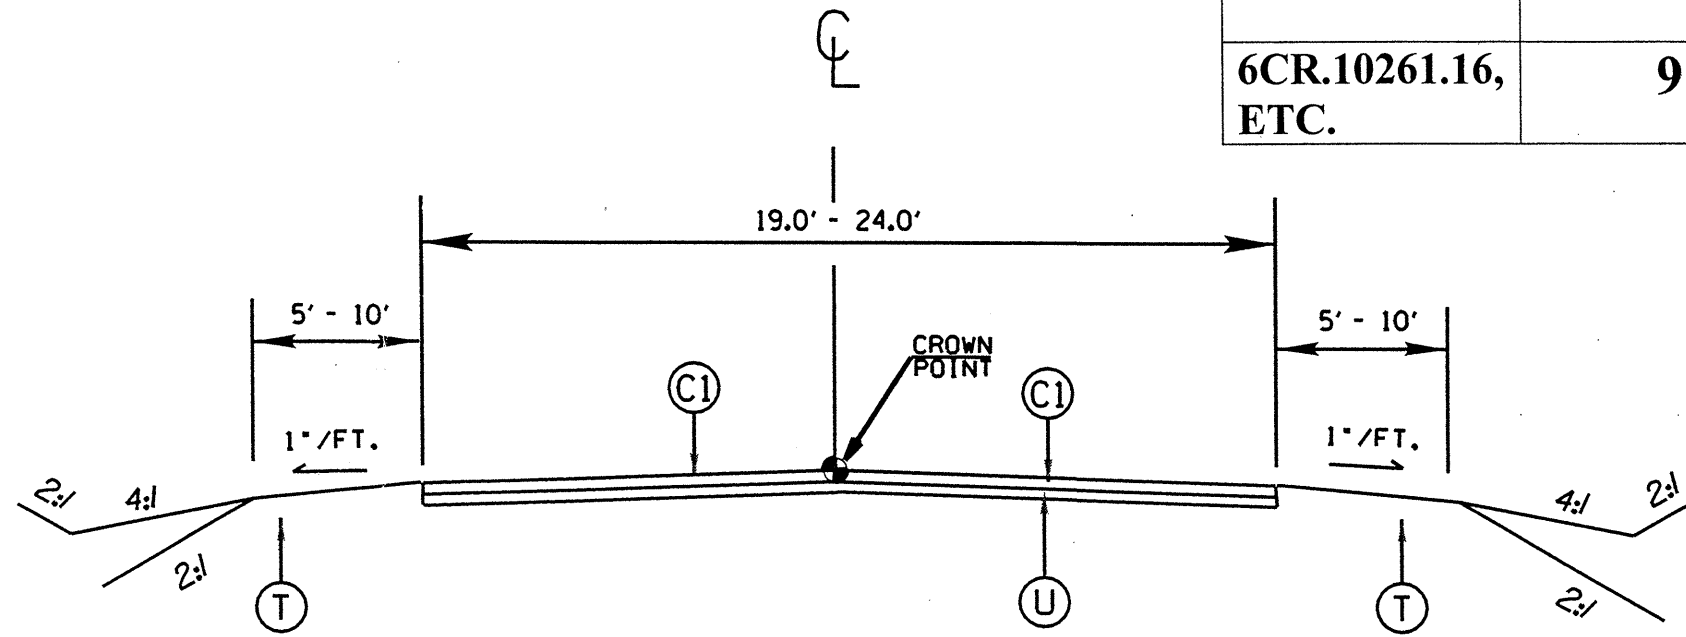

TYPICAL SECTION NO. 1

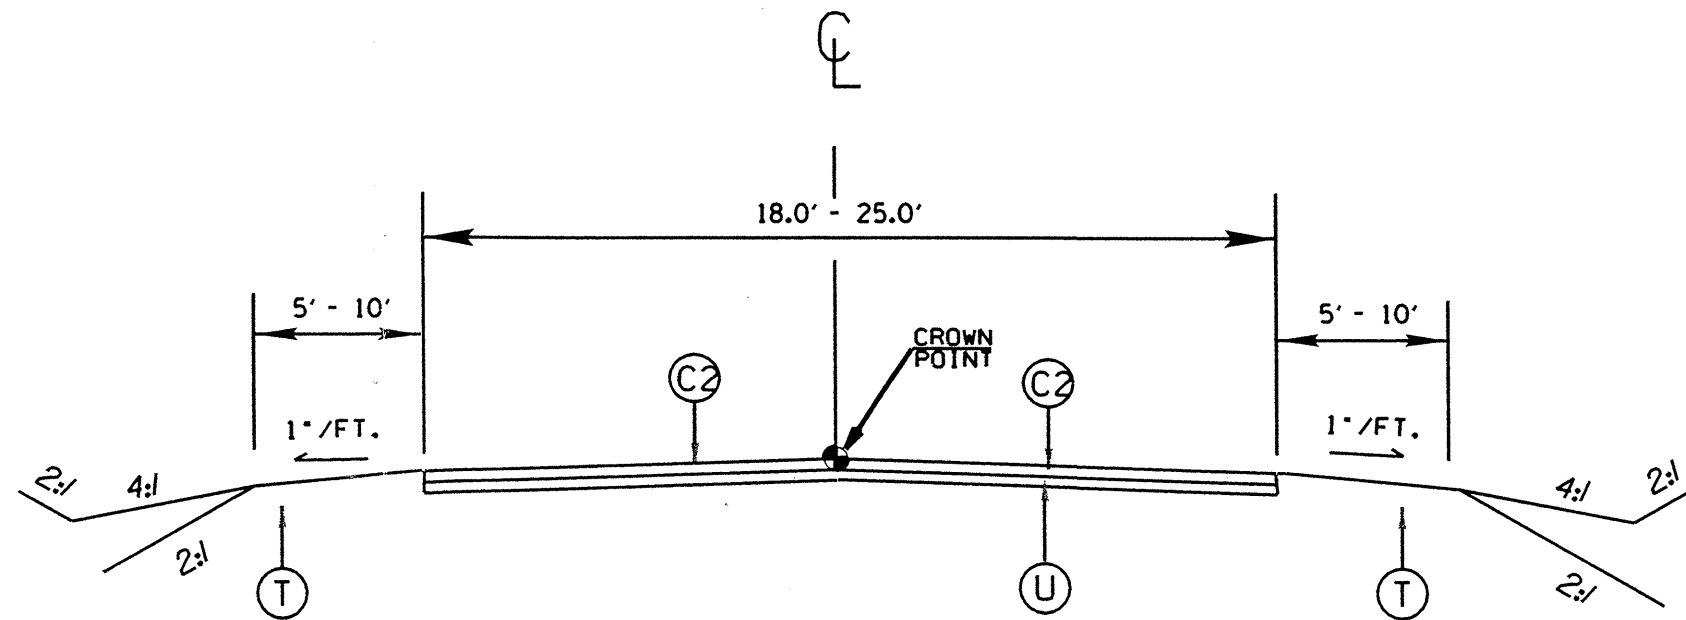

TYPICAL SECTION NO. 2