

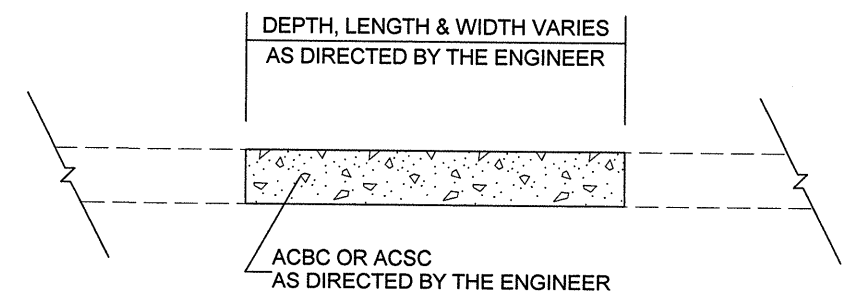


PROJECT NO. 5CR.10931.4, 5CR.20931.4, 5CR.309318.4,	SHEET NO. 6	TOTAL SHEETS
---	-----------------------	--------------

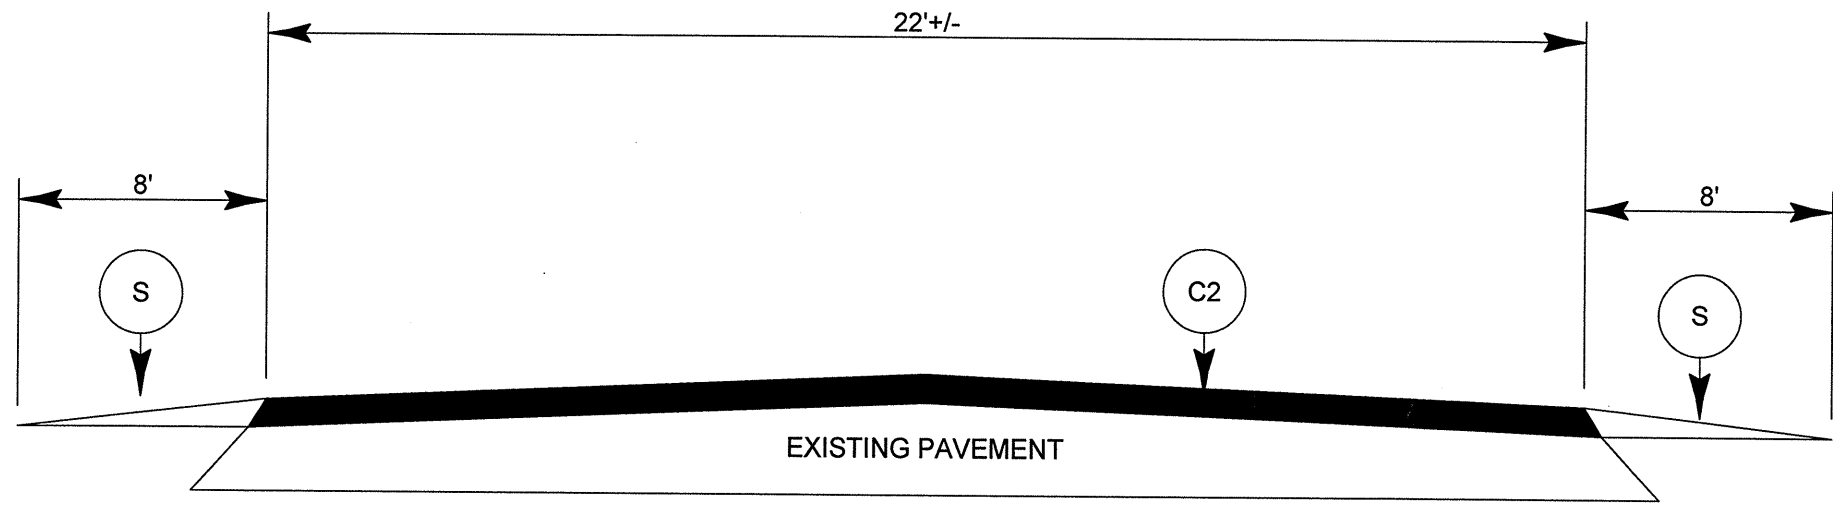

PATCHING EXISTING PAVEMENT

TYPICAL SECTION NO. 1

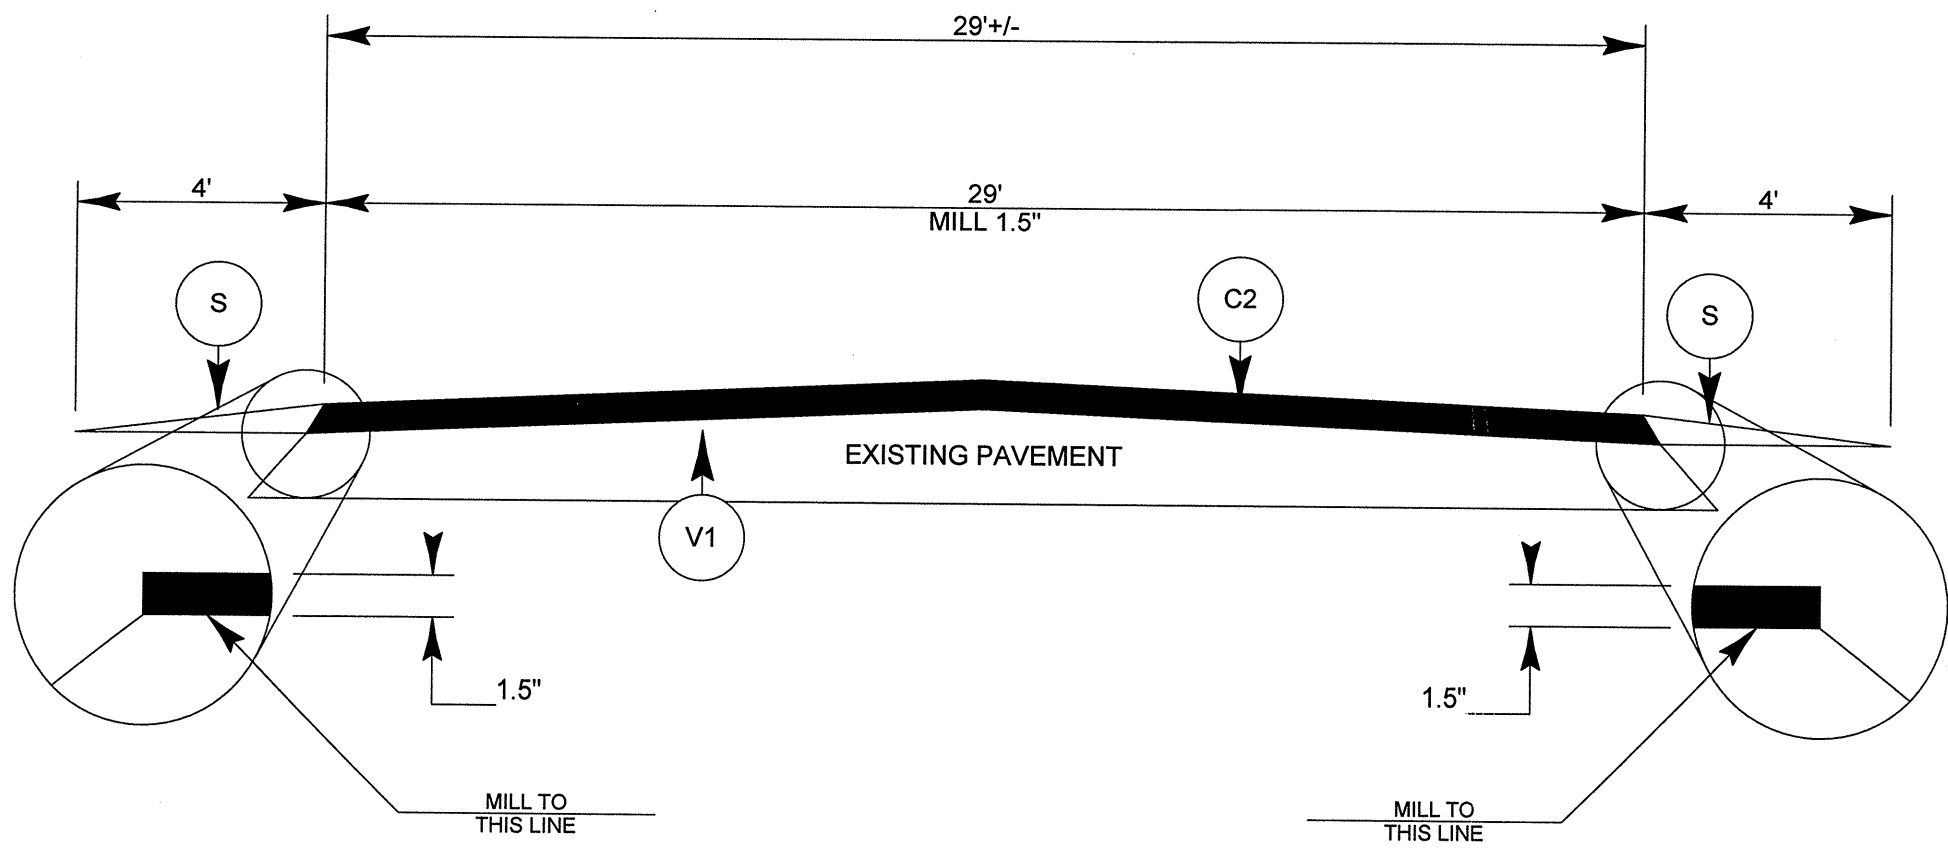

TYPICAL SECTION NO. 2

PAVEMENT SCHEDULE	
C	PROP. APPROX. 1.25" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQUARE YARD
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQUARE YARD
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQUARE YARD
S	SHOULDER RECONSTRUCTION/SEEDING AND MULCHING BY STATE FORCES
V	MILLING 2.5" AS DIRECTED BY THE ENGINEER IN WHEEL PATH RUTTING AND PLACE I19.0B AT AN AVERAGE RATE OF 285 LBS. PER SQUARE YARD, MINIMUM MILLING WIDTH OF 30" NOT CONTINUOUS
V1	MILL 1.5" AS DIRECTED BY THE ENGINEER ON ASPHALT SECTION OF ROADWAY. CONTRACTOR NOT TO MILL/OR PAVE UNDER RR BRIDGE