



SYMBOL	DESCRIPTION	INTERMEDIATE	PAY ITEM QUANTITY BREAKDOWN	TOTAL QUANTITY
PAVEMENT MARKINGS				
PAINT (4")				
PA	WHITE EDGELINE (2X)		77778 LF	
PC	10 FT. WHITE SKIP (2X)		21963 LF	
PD	2 FT. WHITE MINISKIP (2X)		2538 LF	
PE	WHITE SOLID LANE LINE (2X)		15064 LF	
PI	YELLOW DOUBLE CENTER (2X)		131668 LF	
			TOTAL	249011 LF
PAINT (8")				
PR	WHITE GORELINE (2X)		1472 LF	
PV	YELLOW DIAGONAL (2X)		3238 LF	
			TOTAL	4710 LF
PAINT (12")				
P1	WHITE GORELINE (2X)		420 LF	
			TOTAL	420 LF
PAINT (24")				
P4	WHITE STOPBAR (2X)		1816 LF	
			TOTAL	1816 LF
PAINT MARKING CHARACTERS				
QI	ALPHANUMERIC CHAR. (1X)		20 EA	
			TOTAL	20 EA
PAINT MARKING SYMBOLS				
QA	LEFT TURN ARROW (1X)		74 EA	
QB	RIGHT TURN ARROW (1X)		45 EA	
QC	STRAIGHT ARROW (1X)		50 EA	
QD	COMBO. STRAIGHT/LEFT (1X)		4 EA	
QE	COMBO. STRAIGHT/RIGHT (1X)		21 EA	
QG	LEFT/RIGHT/STRAIGHT (1X)		3 EA	
			TOTAL	197 EA
MARKERS				
TEMPORARY RAISED PAVEMENT MARKERS				
MH	YELLOW & YELLOW		159 EA	
MI	CRYSTAL & RED		965 EA	
			TOTAL	1124 EA

PLAN PREPARED IN THE OFFICE OF:  
  
 TRANSPORTATION GROUP, INC.  
 800 W. HILL STREET, SUITE 202  
 CHARLOTTE, NC 28208  
 PH: (980) 321-0202 FAX: (980) 321-0108

APPROVED: *Sam Arvey* DATE: 6/19/04

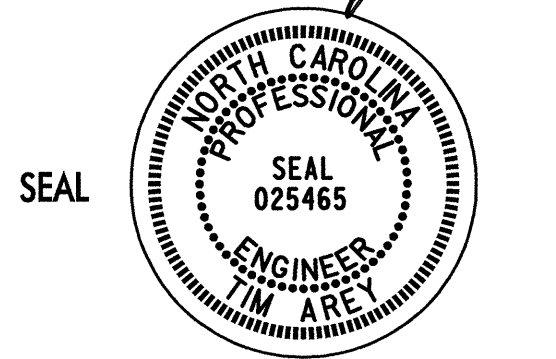

**TEMPORARY PAVEMENT MARKING QUANTITIES**

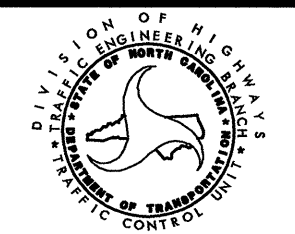SCALE: NONE		REVISIONS
DATE: 6/04		
DWG. BY: LDA		
DESIGN BY: TMA		
REVIEWED BY: TMA		