


DETAIL FOR PROFILE MILLING (O"TO 1.5")

PAVEMENT SCHEDULE

- PROP. APPROX. 1.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
- PROP. APPROX. 2.5" ASPHALT CONC. INTERMEDIATE COURSE, TYPE 119.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
- PROP. APPROX. 6" ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
- PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5.5" IN DEPTH.
- T EARTH MATERIAL
- (x_1) PROFILE MILLING Ø"-1.5"
- (U) EXISTING PAVEMENT

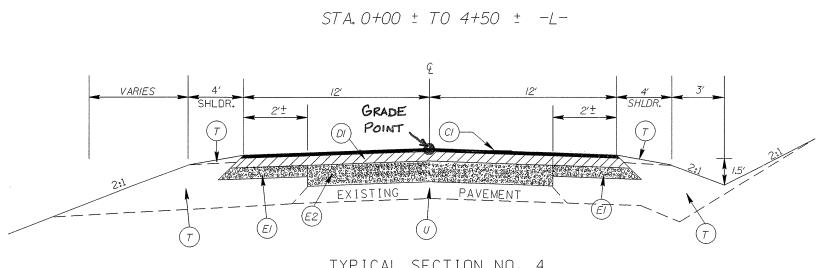

VARIES

SHLDR.

VARIES

EXISTING __ PAVEMENT

TYPICAL SECTION NO. 7

STA. 13+00 ± TO 24+50 ± -L-

VARIES

TYPICAL SECTION NO. 6 STA. 5+00 ± TO /3+00 ± -L-

VARIES

ABC

TYPICAL SECTION NO. 5

TYPICAL SECTION NO. 4

STA. 57+48 ± TO 62+10 ± -L
NOTE: MATCH EXISTING CROSS SLOPE.

LAWYERS RD.
IN UNION CO. (MAIOISIR)

SCALE	-NA-	
DATE	02/05	
DWG. BY	RWB	
DESIGN BY	TWB	
APPROVED	мРм	

	REVISIONS	
Jan CON STREET		