


TYPICAL SECTION NO.2

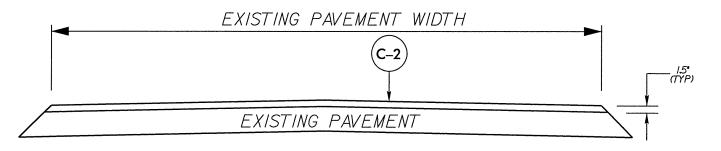

TYPICAL SECTION NO.3

SHEET NO. OF OF STOKES COUNTY
WORK ORDER NOS. 9CR.10851.3,
9CR.20851.3, 9CR.308517.3,
9CR.308521.3
NCMA WORK ORDER NO. 37816
TYPICAL SECTION SHEET (1 OF 2)

| PAVEMENT SCHEDULE |   |
|-------------------|---|
| С                 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF <u>168</u> LBS PER SQ YD  |
| C - 1             | PROP. APPROX. 1.62" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF <u>180</u> LBS PER SQ YD |
| C-2               | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF <u>168</u> LBS PER SQ YD  |
| E                 | PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B,AT AN AVERAGE RATE OF <u>627</u> LBS PER SQ YD     |
| М                 | MILLING ASPHALT PAVEMENT, 0" TO 1.5"<br>DEPTH, FULL WIDTH   |