
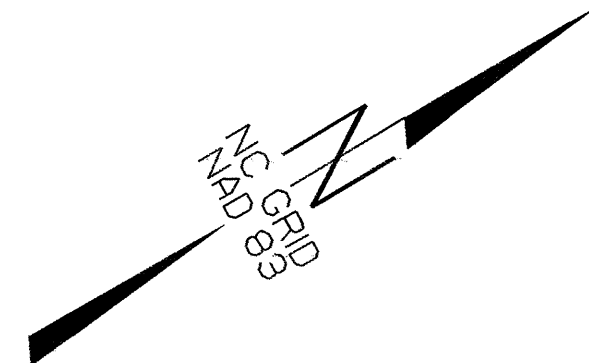
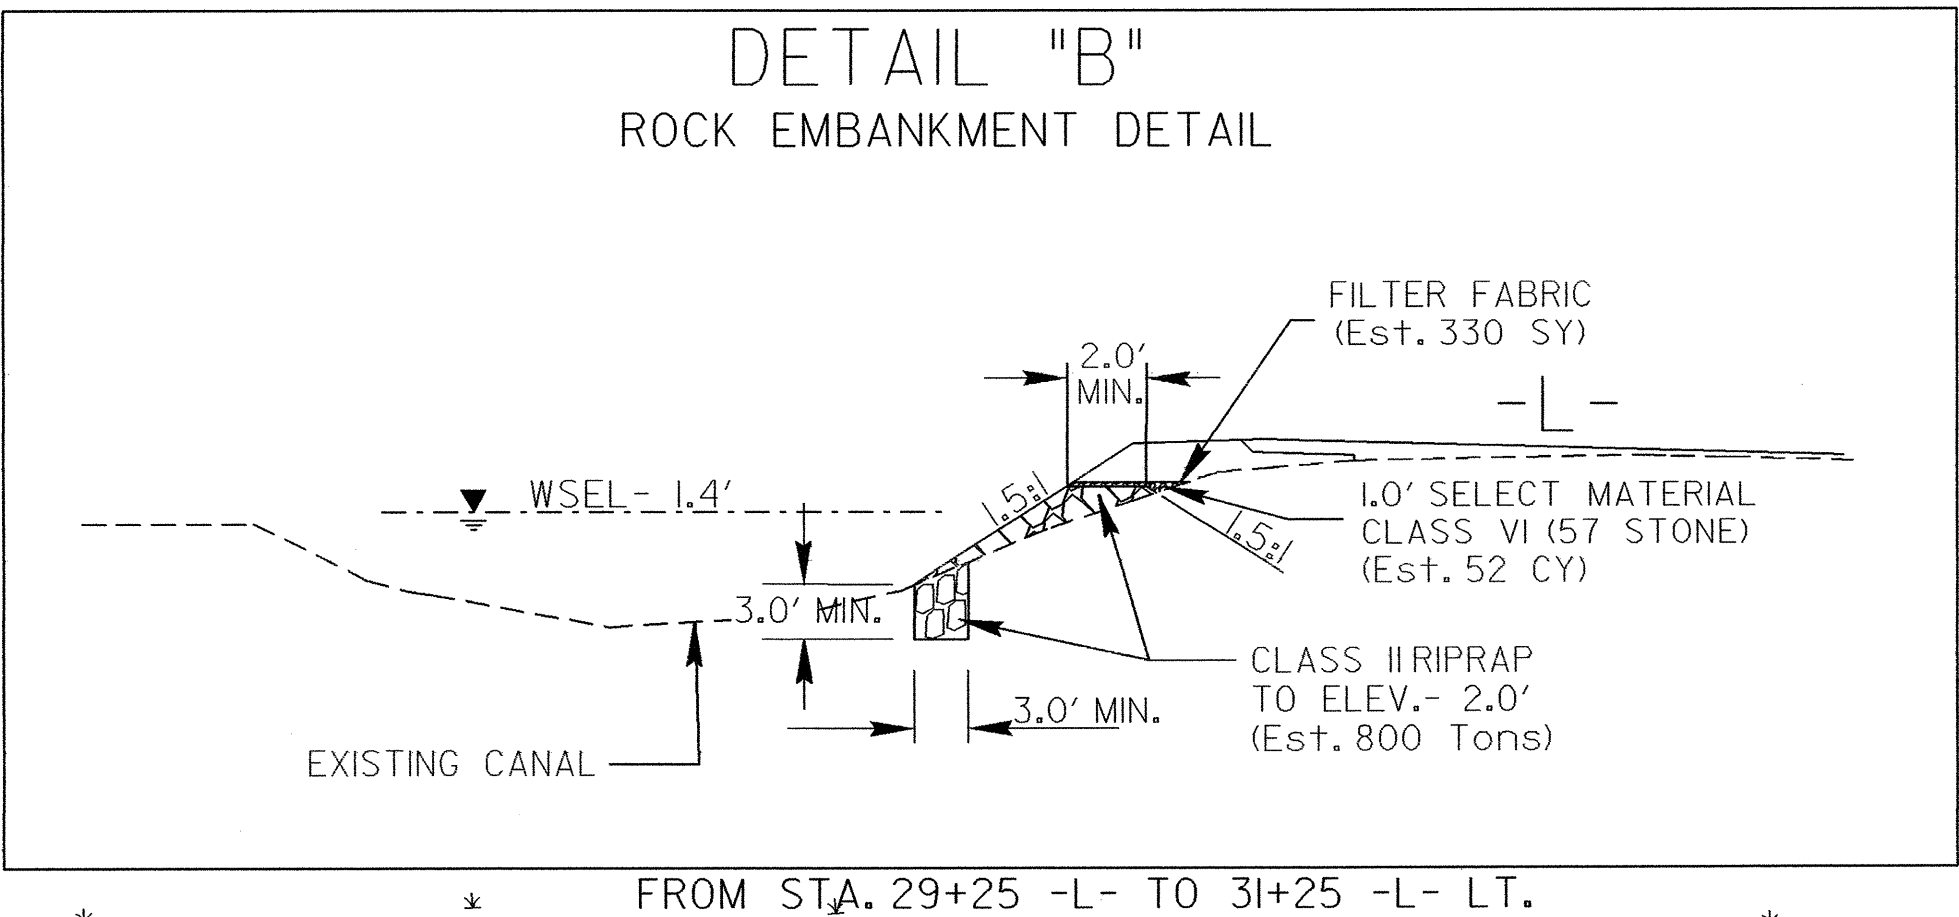


PROJECT REFERENCE NO.	SHEET NO.
B-3348	EC-4/CONST. 5
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

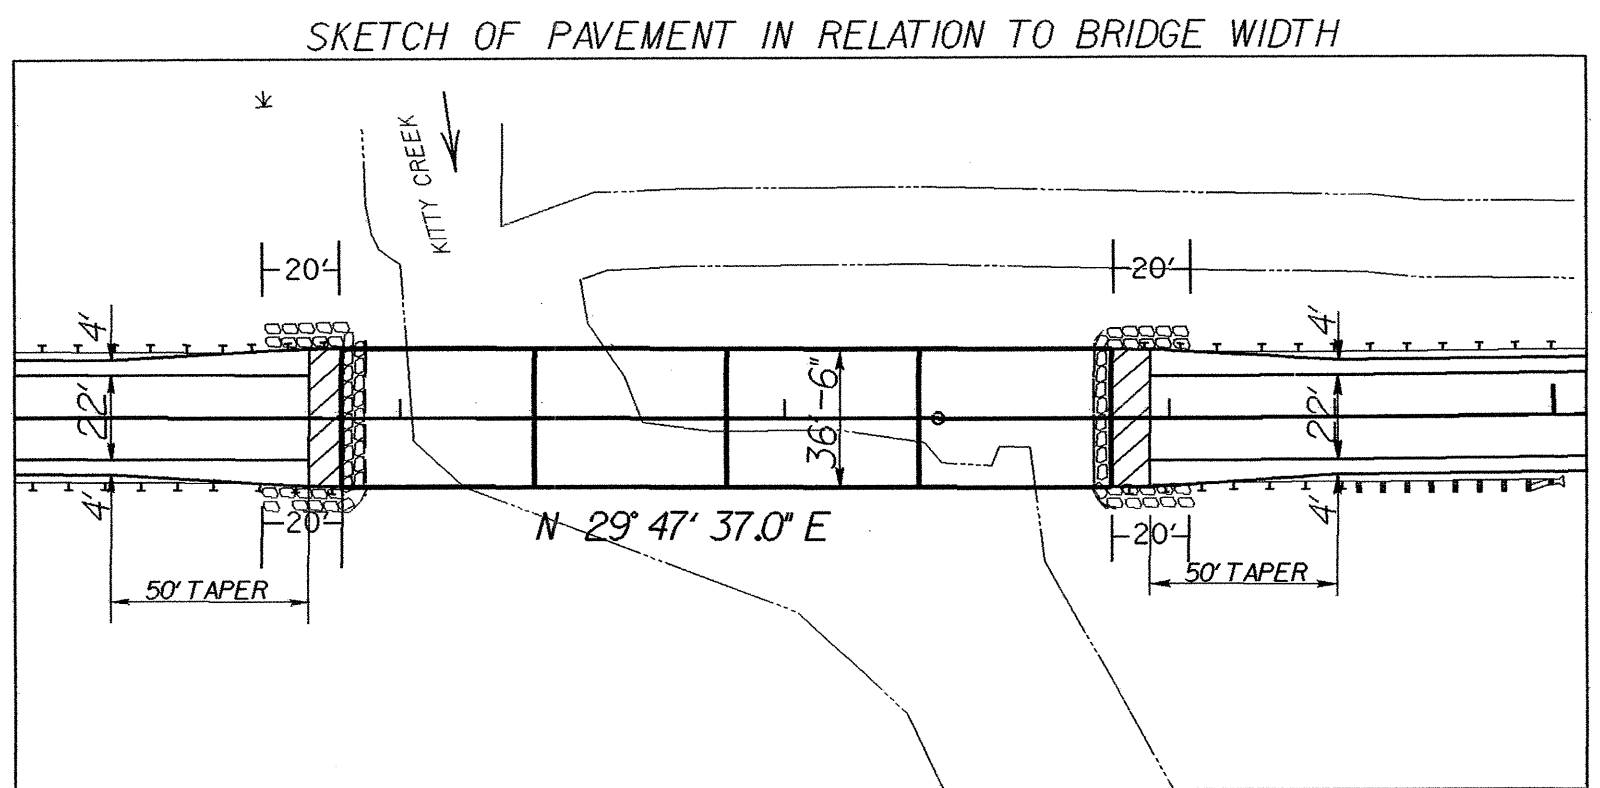

NOTE: SEE SHEET No. 6 FOR -L- PROFILE
NOTE: SEE S- THRU S- FOR STRUCTURE PLANS


NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 5


ENVIRONMENTALLY SENSITIVE AREA SEE PROJECT SPECIAL PROVISIONS

NOTE: UTILIZE TEMPORARY ROCK SILT CHECK TYPE - A AS STILLING BASIN WHERE APPLICABLE.

NOTE: TEMPORARY SILT FENCE SHALL BE INSTALLED A MINIMUM OF 3 FEET FROM TOE OF FILL IN WETLAND AREAS

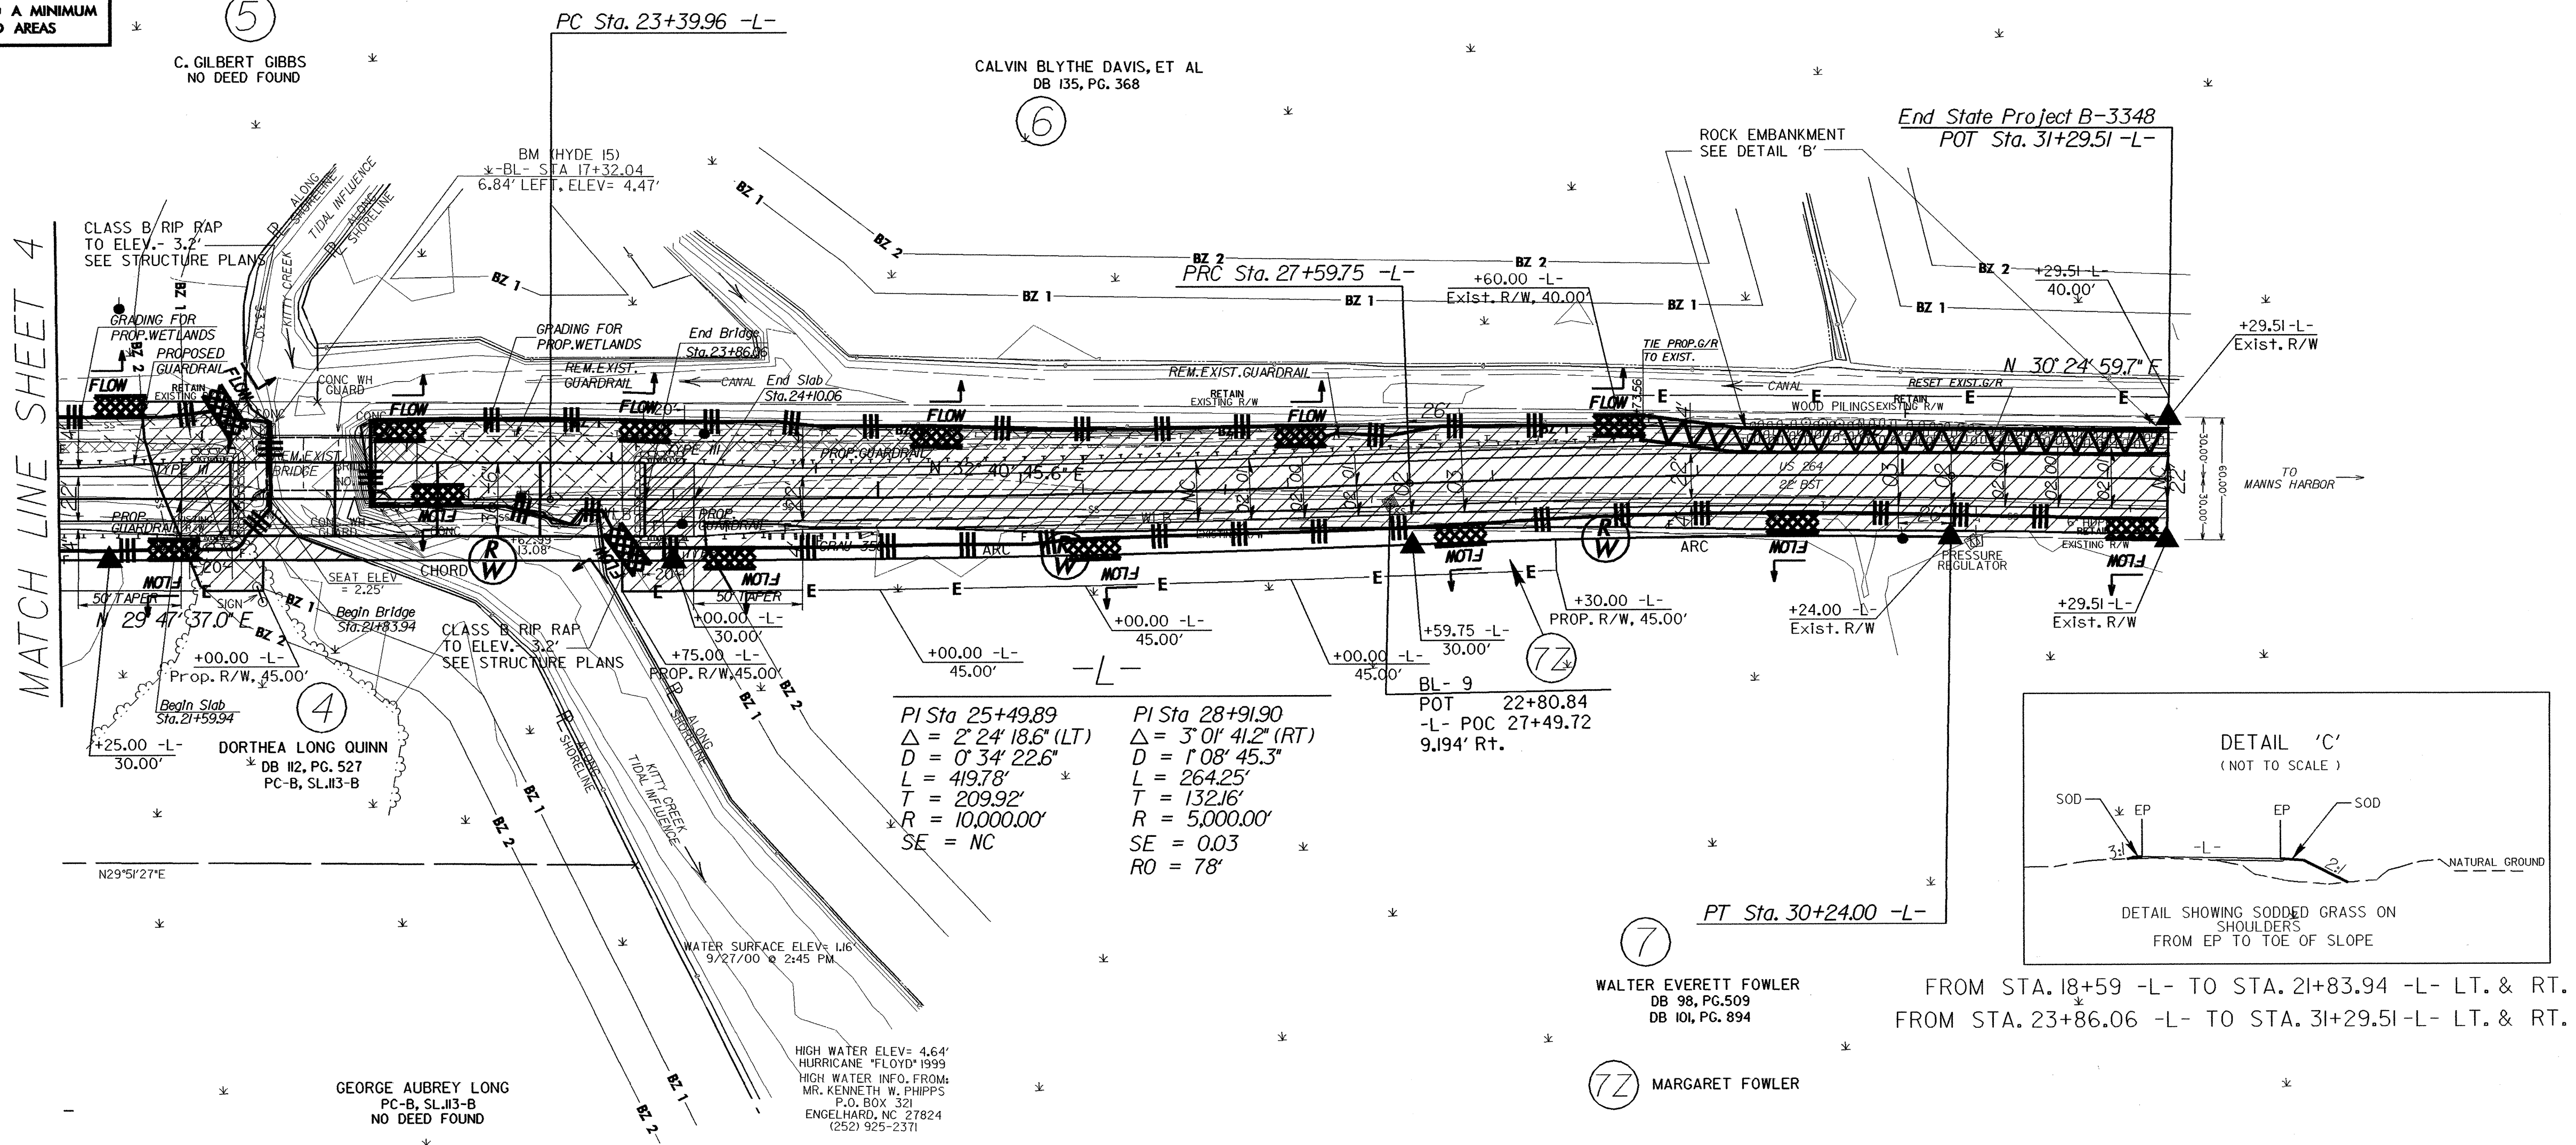

MATCH LINE SHEET 4

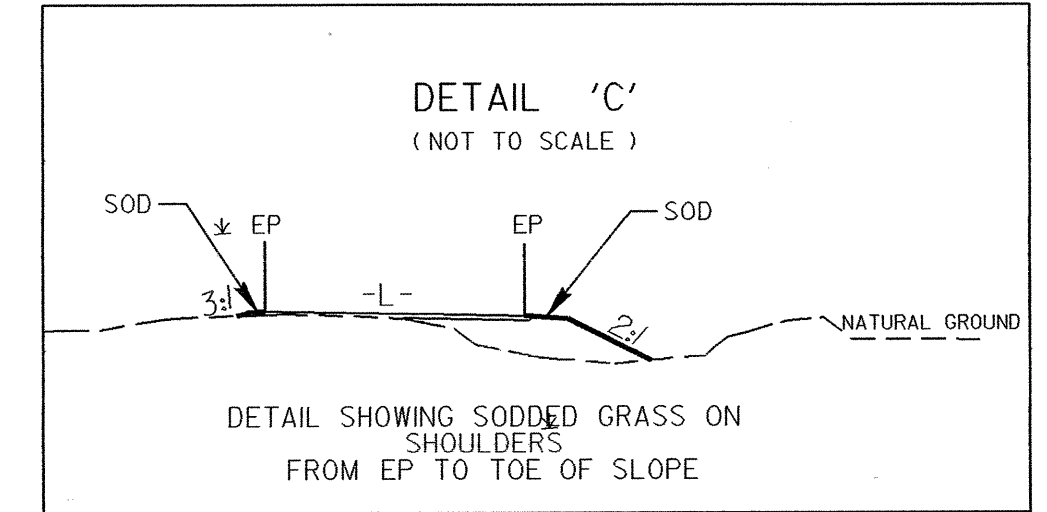

FROM STA. 18+59 -L- TO STA. 21+83.94 -L- LT. & RT.
FROM STA. 23+86.06 -L- TO STA. 31+29.51 -L- LT. & RT.

WALTER EVERETT FOWLER
DB 98, PG. 509
DB 101, PG. 894

MARGARET FOWLER

PAVEMENT REMOVAL

BRIDGE APPROACH SLAB

GRADING FOR PROP. WETLAND (SEE CROSS SECTIONS)

HIGH WATER ELEV= 4.64'
HURRICANE "FLOYD" 1999
HIGH WATER INFO. FROM:
MR. KENNETH W. PHIPPS
P.O. BOX 321
ENGELHARD, NC 27824
(252) 925-2371