8/17/99

PROJECT REFERENCE NO.	SHEET NO.
B-3348	U0-2

UTILITIES BY OTHERS

NOTE:
ALL PROPOSED UTILITY WORK SHOWN ON THIS SHEET WILL BE DONE BY OTHERS

R/W REVISION 5/16/03 JCL
EXPANDED TEMP.CONST.EASEMENT ON PARCEL 4

NOTE: SEE SHEET No.6 FOR -L- PROFILE
NOTE: SEE SHEET No.7 FOR -Y- PROFILE
NOTE: SEE SHEET No.7 FOR -Y1- PROFILE
NOTE: SEE SHEET No.7 FOR -DR- PROFILE
NOTE: SEE SHEET S-1 THRU S- FOR STRUCTURE PLANS

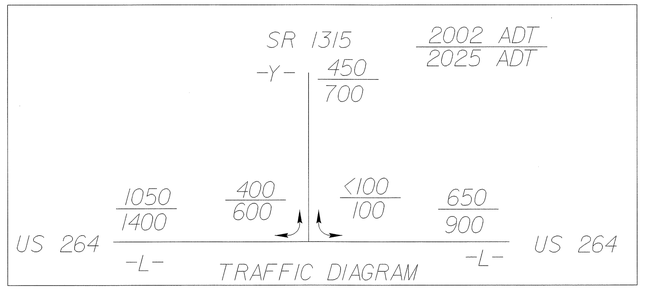

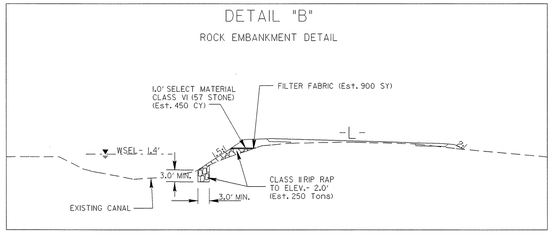

FROM STA. 10+70 TO 11+30 -Y- LT.

SKETCH OF PAVEMENT IN RELATION TO BRIDGE WIDTH

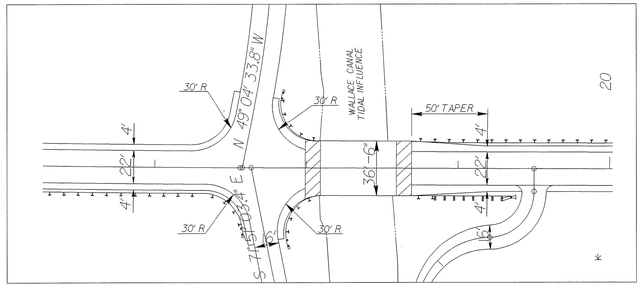



-L-

PI Sta 12+95.86	PI Sta 16+37.71
Δ = 5° 07' 21.1" (RT)	Δ = 1° 21' 27.5" (LT)
D = 1° 08' 45.3"	D = 0° 34' 22.6"
L = 447.03'	L = 236.95'
T = 223.66'	T = 118.48'
R = 5,000.00'	R = 10,000.00'
SE = 0.03	SE = NC
RO = 78'	

NATHAN PAUL GIBBS
NO DEED FOUND
(2)

PRC Sta. 15+19.23 -L-

-DR-

PI Sta 11+08.84	PI Sta 10+43.99
Δ = 87° 21' 28.8" (LT)	Δ = 88° 05' 28.0" (RT)
D = 114° 35' 29.6"	D = 190° 59' 09.4"
L = 76.23'	L = 46.12'
T = 47.75'	T = 29.02'
R = 50.00'	R = 30.00'
SE = NC	SE = NC

EXIST. U/G TEL. CABLES TO REMAIN IN SERVICE.

POT Sta. 13+18.54 -Y-

-Y-

PI Sta 11+23.53
Δ = 13° 55' 09.1" (LT)
D = 8° 00' 07.0"
L = 173.94'
T = 87.40'
R = 716.00'
SE = NC

EXIST. U/G TEL. CABLES TO BE REMOVED OR ABANDONED.

C. GILBERT GIBBS
NO DEED FOUND
(5)

PT Sta. 12+10.07 -Y-
End Construction

POT Sta. 10+00.00 -Y1- =
POT Sta. 17+63.63 -L-

POT Sta. 10+00.00 -DR- =
POT Sta. 10+00.63 -L-

GRADING FOR PROP.WETLANDS

BEGIN STATE PROJECT No.B-3348
-L- POT Sta. 10+00.00

N 26° 01' 43.4" E

BM-9 R/R SPIKE IN 18" PINE
ELEV. = 4.43'
99.9' RT OF -BL- 4+82.7

PC Sta. 10+72.20 -L-

PRC Sta. 15+19.23 -L-

PT Sta. 17+56.18 -L-

PC Sta. 10+36.13 -Y-

POT Sta. 10+00.00 -Y- =
POT Sta. 17+57.69 -L-

EXIST. U/G TEL. CABLES TO BE REMOVED OR ABANDONED.

PT Sta. 11+37.33 -DR-
End Construction
-DR- Sta. 11+40.00

DORTHEA LONG QUINN
DB 112, PG. 527
PC-B, SL.113-B
(4)

POT Sta. 11+50.00 -DR-

PC Sta. 11+07.58 -Y1-

PT Sta. 12+59.43 -Y1-
End Construction
Sta. 12+60.00 -Y1-

POT Sta. 12+82.36 -Y1-

PI Sta 11+83.65
Δ = 8° 41' 59.9" (RT)
D = 5° 43' 46.5"
L = 151.84'
T = 76.07'
R = 1,000.00'
SE = NC

GEORGE AUBREY LONG
PC-B, SL.113-B
NO DEED FOUND

EASEMENT TO:
STATE OF NORTH CAROLINA
(NC WILDLIFE RESOURCES COMMISSION)
DB 78, PG. 145

BM-10 BRIDGE NAIL IN 18" PINE
ELEV.= 2.69'
320.8' RT OF -BL- 13+64.9

DETAIL 'A'
ROCK EMBANKMENT
(NOT TO SCALE)

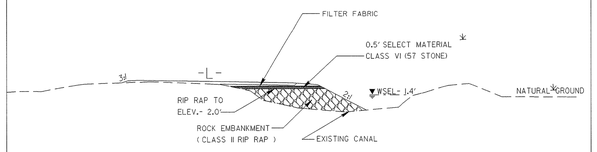

DETAIL SHOWING PLACEMENT OF ROCK EMBANKMENT FOR -L-

FROM STA. 13+25 TO 17+50 -L- RT.

EXIST. U/G TEL. CABLES TO BE REMOVED OR ABANDONED.

(1) C. GILBERT GIBBS
NO DEED FOUND

SPECIAL SHOP CURVED ANCHOR UNIT

GRADING FOR PROP.WETLAND
PAVEMENT REMOVAL
BRIDGE APPROACH SLAB

PROPERTY OWNERS

(3)	KENNETH W. PHIPPS DB 146, PG. 746 PC-C, SL. 181

MATCH LINE SHEET U0-3

27-FEB-2004 13:49
R:\Utilities\Proj_UAP\b3348\b3348_U02_ut_psh.dgn
$$$$ comments 01/07/2003