






# FINAL PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAVEMENT MARKINGS	PAY ITEM QUANTITY	TOTAL
		THERMOPLASTIC (100MM, 2.3MM)		
TA	WHITE EDGELINE		5258 M	
TB	YELLOW EDGELINE		4257 M	
				TOTAL 9515 M
		THERMOPLASTIC (100MM, 3.1MM)		
TC	3 M. WHITE SKIP		3004 M	
TD	0.5 M. WHITE MINISKIP		231 M	
TE	WHITE SOLID LANE LINE		1794 M	
TF	3 M. YELLOW SKIP		69 M	
TH	YELLOW SINGLE CENTER		225 M	
TI	YELLOW DOUBLE CENTER		1558 M	
				TOTAL 6881 M
		THERMOPLASTIC (200MM, 2.3MM)		
TP	WHITE GORELINE		1278 M	
TQ	WHITE DIAGONAL		440 M	
TT	YELLOW DIAGONAL		50 M	
				TOTAL 1768 M
		THERMOPLASTIC (200MM, 3.1MM)		
TV	WHITE CROSSWALK LINE		500 M	
				TOTAL 500 M
		THERMOPLASTIC (600MM, 3.1MM)		
T2	WHITE STOPBAR		539 M	
				TOTAL 539 M
		THERMOPLASTIC PAVEMENT MARKING CHARACTER (3.1MM)		
UI	ALPHANUMERIC CHAR.		2 EA	
				TOTAL 2 EA
		THERMOPLASTIC PAVEMENT MARKING SYMBOLS (2.3MM)		
UA	LEFT TURN ARROW		91 EA	
UB	RIGHT TURN ARROW		42 EA	
UC	STRAIGHT ARROW		78 EA	
UD	COMBO.STRAIGHT/LEFT		7 EA	
UE	COMBO.STRAIGHT/RIGHT		21 EA	
UG	LEFT/RIGHT/STRAIGHT		1 EA	
				TOTAL 240 EA
		MARKERS		
		SNOWPLOWABLE RAISED PAVEMENT MARKERS		
ME	YELLOW & YELLOW		53 EA	
MF	CRYSTAL & RED		1019 EA	
				TOTAL 1072 EA

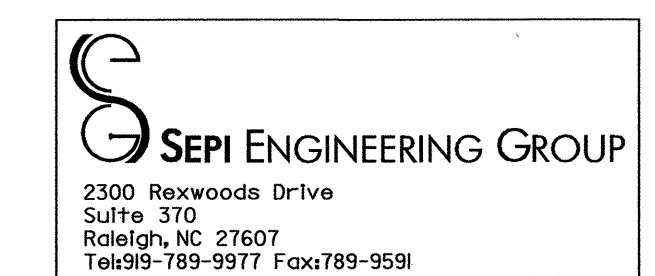

APPROVED: \_\_\_\_\_ DATE: 2/4/04

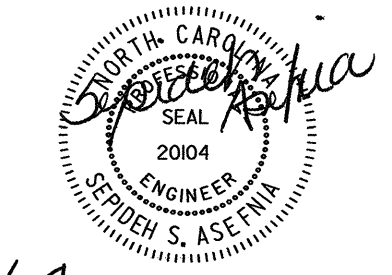
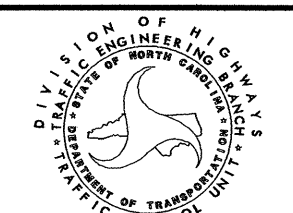
<b>FINAL PAVEMENT MARKING SCHEDULE</b>	
SCALE: NONE	
DATE: 12/03	
DESIGN BY: RLW	
REVIEWED BY: SSA	
REVISIONS	