



# PROJECT NOTES

## GENERAL NOTES (CONT.)

### PAVEMENT MARKINGS AND MARKERS

BB) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:

ROAD NAME	MARKING	MARKER
1. ALL ROADS	THERMOPLASTIC	SNOWPLOWABLE RAISED

CC) INSTALL TEMPORARY PAVEMENT MARKINGS AND TEMPORARY PAVEMENT MARKERS ON INTERIM LAYERS OF PAVEMENT AS FOLLOWS:

ROAD NAME	MARKING	MARKER
1. ALL ROADS	PAINT	TEMPORARY RAISED

DD) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.

EE) REPLACE ANY PAVEMENT MARKINGS THAT HAVE BEEN DAMAGED BY THE END OF EACH DAY'S OPERATION.

FF) TRACE THE EDGE OF PROPOSED MONOLITHIC ISLANDS WITH THE PROPER COLOR PAVEMENT MARKING PRIOR TO INSTALLATION OF A PROPOSED MONOLITHIC ISLAND.

GG) PLACE AT LEAST TWO APPLICATIONS OF PAINT ON NEW ASPHALT WITH TEMPORARY TRAFFIC PATTERNS WHICH WILL REMAIN IN PLACE OVER THREE (3) MONTHS. PLACE ADDITIONAL APPLICATIONS OF PAINT UPON SUFFICIENT DRYING TIME, AS DETERMINED BY THE ENGINEER.

### TEMPORARY/FINAL SIGNALS

HH) NOTIFY THE ENGINEER TWO (2) MONTHS BEFORE A TRAFFIC SIGNAL INSTALLATION BY OTHERS IS REQUIRED.

II) SHIFT AND REVISE ALL SIGNAL HEADS AS SHOWN ON THE SIGNAL PLANS.

### MISCELLANEOUS

JJ) POLICE MAY BE USED TO MAINTAIN TRAFFIC THROUGH INTERSECTIONS.


KK) PLACE DRUMS TO DELINEATE EXISTING AND/OR PROPOSED ISLANDS AFTER REMOVAL AND/OR BEFORE INSTALLATION.

## LOCAL NOTES

- DO NOT INSTALL LANE CLOSURES ON COVIL FARM ROAD FROM 6:00AM TO 7:00PM MONDAY THRU FRIDAY.

## TEMP. PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY	TOTAL
PAVEMENT MARKINGS			
PAINT (100MM)			
PA	WHITE EDGELINE (2X)	22658 M	
PB	YELLOW EDGELINE (2X)	14995 M	
PC	3 M. WHITE SKIP (2X)	6764 M	
PD	0.5 M. WHITE MINISKIP (2X)	218 M	
PE	WHITE SOLID LANE LINE (2X)	3514 M	
PF	3 M. YELLOW SKIP (2X)	436 M	
PH	YELLOW SINGLE CENTER (2X)	675 M	
PI	YELLOW DOUBLE CENTER (2X)	12226 M	
		TOTAL	61486 M
PAINT (200MM)			
PR	WHITE GORELINE (1X)	1498 M	
PS	WHITE DIAGONAL (1X)	40 M	
PV	YELLOW DIAGONAL (2X)	480 M	
		TOTAL	2018 M
PAINT (600MM)			
P4	WHITE STOPBAR (2X)	845 M	
		TOTAL	845 M
PAINT MARKING CHARACTERS			
QI	ALPHANUMERIC CHAR. (2X)	12 EA	
		TOTAL	12 EA
PAINT MARKING SYMBOLS			
QA	LEFT TURN ARROW (1X)	116 EA	
QB	RIGHT TURN ARROW (1X)	60 EA	
QC	STRAIGHT ARROW (1X)	126 EA	
QD	COMBO.STRAIGHT/LEFT (1X)	6 EA	
QE	COMBO.STRAIGHT/RIGHT (1X)	40 EA	
		TOTAL	348 EA
MARKERS			
TEMPORARY RAISED PAVEMENT MARKERS			
MH	YELLOW & YELLOW	284 EA	
MI	CRYSTAL & RED	74 EA	
		TOTAL	358 EA

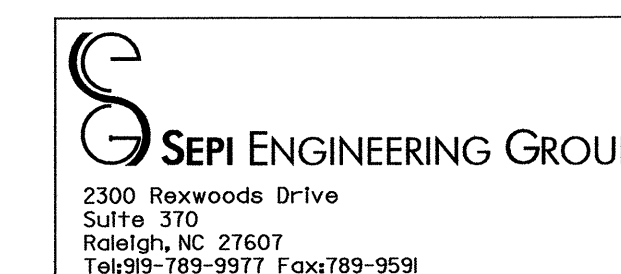

APPROVED:	DATE:
2/3/04	

PROJECT NOTES	
SCALE: NONE	REVISIONS
DATE: 12/03	
DWG. BY: NH	
DESIGN BY: RLW	
REVIEWED BY: SSA	