

REPEATER 7 (I-40 AT MILE MARKER 68.9)
INSTALL THE FOLLOWING:

QUANTITY	DESCRIPTION
1	NEW ELECTRICAL SERVICE
1	CLASS 3, 35' WOOD POLE
1	EQUIPMENT CABINET (POLE MOUNTED)
1	WIRELESS DATA TRANSCEIVER

REPEATER 9 (I-40 AT MILE MARKER 69.4)
INSTALL THE FOLLOWING:

QUANTITY	DESCRIPTION
1	NEW ELECTRICAL SERVICE
1	CLASS 3, 35' WOOD POLE
1	EQUIPMENT CABINET (POLE MOUNTED)
1	WIRELESS DATA TRANSCEIVER

SENSOR 3 (I-40 AT MILE MARKER 68.2)
INSTALL THE FOLLOWING:

QUANTITY	DESCRIPTION
1	SOLAR POWER ASSEMBLY
1	CLASS 3, 35' WOOD POLE
1	EVENT PROCESSOR /WIRELESS TRANSCEIVER
1	VISIBILITY SENSOR (VS)

REPEATER 8 (I-40 AT MILE MARKER 69.2)
INSTALL THE FOLLOWING:

QUANTITY	DESCRIPTION
1	NEW ELECTRICAL SERVICE
1	CLASS 3, 35' WOOD POLE
1	EQUIPMENT CABINET (POLE MOUNTED)
1	WIRELESS DATA TRANSCEIVER

REPEATER 10 (I-40 AT MILE MARKER 70.1)
INSTALL THE FOLLOWING:

QUANTITY	DESCRIPTION
1	NEW ELECTRICAL SERVICE
1	CLASS 3, 35' WOOD POLE
1	EQUIPMENT CABINET (POLE MOUNTED)
1	WIRELESS DATA TRANSCEIVER

REPEATER 6 (I-40 AT MILE MARKER 68.0)
INSTALL THE FOLLOWING:


QUANTITY	DESCRIPTION
1	SOLAR POWER ASSEMBLY
1	CLASS 3, 35' WOOD POLE
1	WIRELESS DATA TRANSCEIVER

SENSOR 5 (I-40 AT MILE MARKER 69.6)
(ON EXISTING STRUCTURE CONTAINING "TRUCK SPEED TOO FAST" SIGNS)
INSTALL THE FOLLOWING:

QUANTITY	DESCRIPTION
1	NEW ELECTRICAL SERVICE
1	EVENT PROCESSOR /WIRELESS TRANSCEIVER
1	VISIBILITY SENSOR (VS)
1	EQUIPMENT CABINET (POLE MOUNTED)

MATCH LINE "A"

MATCH LINE "B"

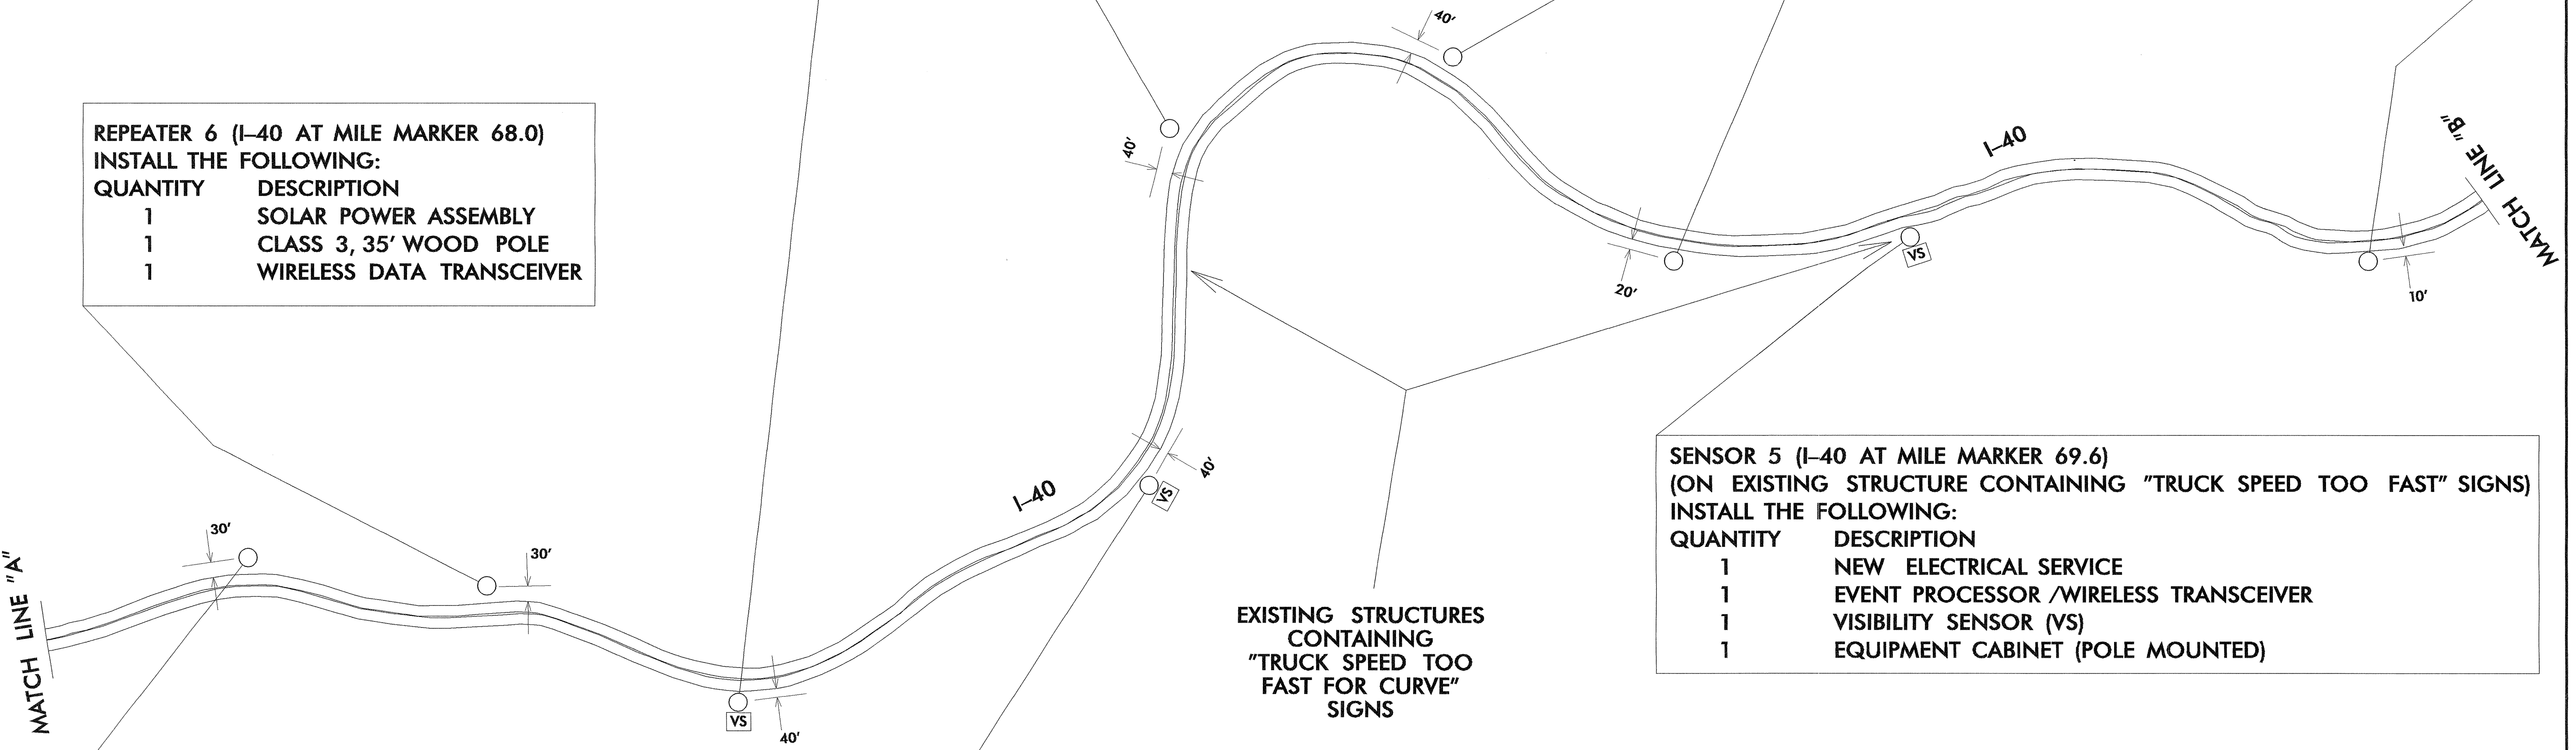

EXISTING STRUCTURES CONTAINING "TRUCK SPEED TOO FAST FOR CURVE" SIGNS


SENSOR 4 (I-40 AT MILE MARKER 68.6)
INSTALL THE FOLLOWING:

QUANTITY	DESCRIPTION
1	NEW ELECTRICAL SERVICE
1	CLASS 3, 35' WOOD POLE
1	EVENT PROCESSOR /WIRELESS TRANSCEIVER
1	VISIBILITY SENSOR (VS)
1	EQUIPMENT CABINET (POLE MOUNTED)

REPEATER 5 (I-40 AT MILE MARKER 67.8)
INSTALL THE FOLLOWING:

QUANTITY	DESCRIPTION
1	SOLAR POWER ASSEMBLY
1	CLASS 3, 35' WOOD POLE
1	WIRELESS DATA TRANSCEIVER

LOCATIONS ARE APPROXIMATE.
 FINAL LOCATIONS ARE TO BE APPROVED BY THE ENGINEER.

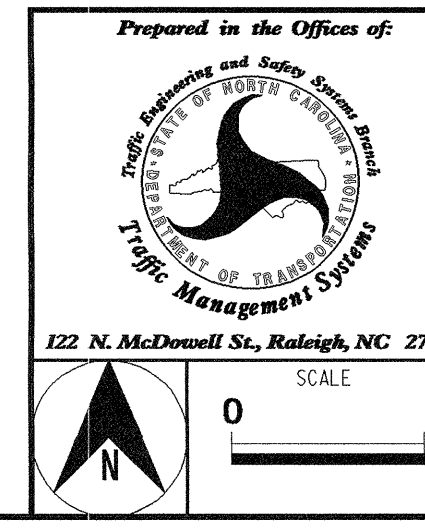

VISIBILITY SENSOR AND FLASHING BEACONS SITE INSTALLATION PLANS	
DIVISION 13	BUNCOMBE/MCDOWELL CO.
PLAN DATE: APRIL 2004	REVIEWED BY: S. YOW/T. PARKER
PREPARED BY: J. T. ROWE, JR.	REVIEWED BY: G. G. MURR, JR.
REVISIONS	INIT. DATE

