

NOTES

STIRRUPS IN CAP MAY BE SHIFTED AS NECESSARY TO CLEAR ANCHOR BOLTS.
FOR EPOXY PROTECTIVE COATING, SEE SPECIAL PROVISIONS.


PIPE DRAINS MAY BE SHIFTED SLIGHTLY AS NECESSARY TO CLEAR REINFORCING STEEL AND ANCHOR BOLTS.

BACKWALL SHALL BE PLACED BEFORE APPLYING THE EPOXY PROTECTIVE COATING.


THE TOP SURFACE AREAS OF THE END BENT CAPS SHALL BE CURED IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS EXCEPT THAT THE MEMBRANE CURING COMPOUND METHOD SHALL NOT BE USED.

THE TOP SURFACE OF THE CAP EXCEPT THE BRIDGE SEAT BUILDUPS SHALL BE SLOPED TRANSVERSELY FROM THE FILL FACE TO THE BACK FACE AT THE RATE OF 2%.

THE CONTRACTOR SHALL PROVIDE FOR INSTALLATION OF THE 102mm DIAMETER DRAIN PIPE THROUGH THE WING WALL AS REQUIRED FOR REINFORCED BRIDGE APPROACH FILLS, SEE THE ROADWAY PLANS. REINFORCING STEEL IN THE WING WALL MAY BE SHIFTED AS NECESSARY TO CLEAR THE DRAIN PIPE.

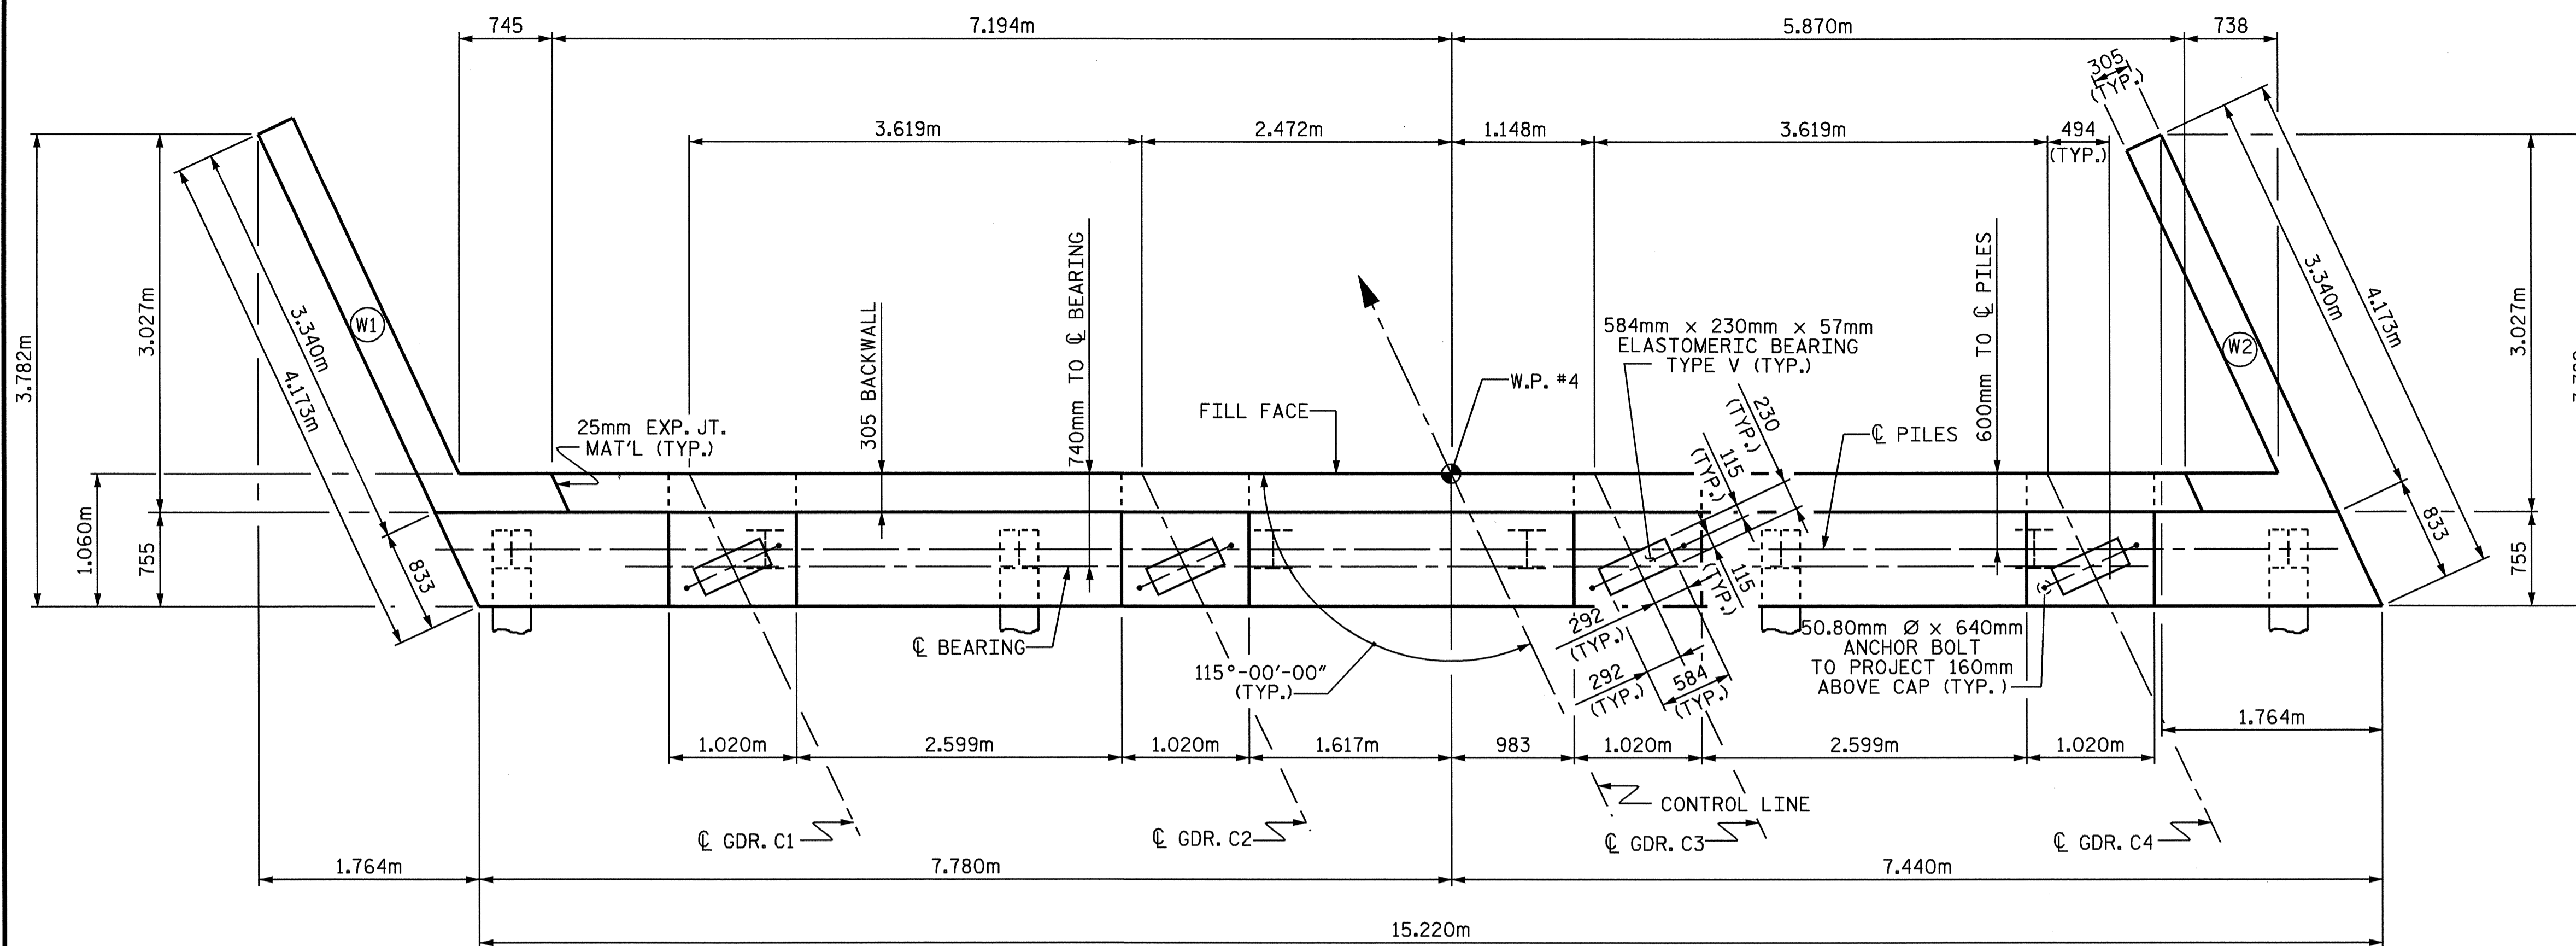

PLAN

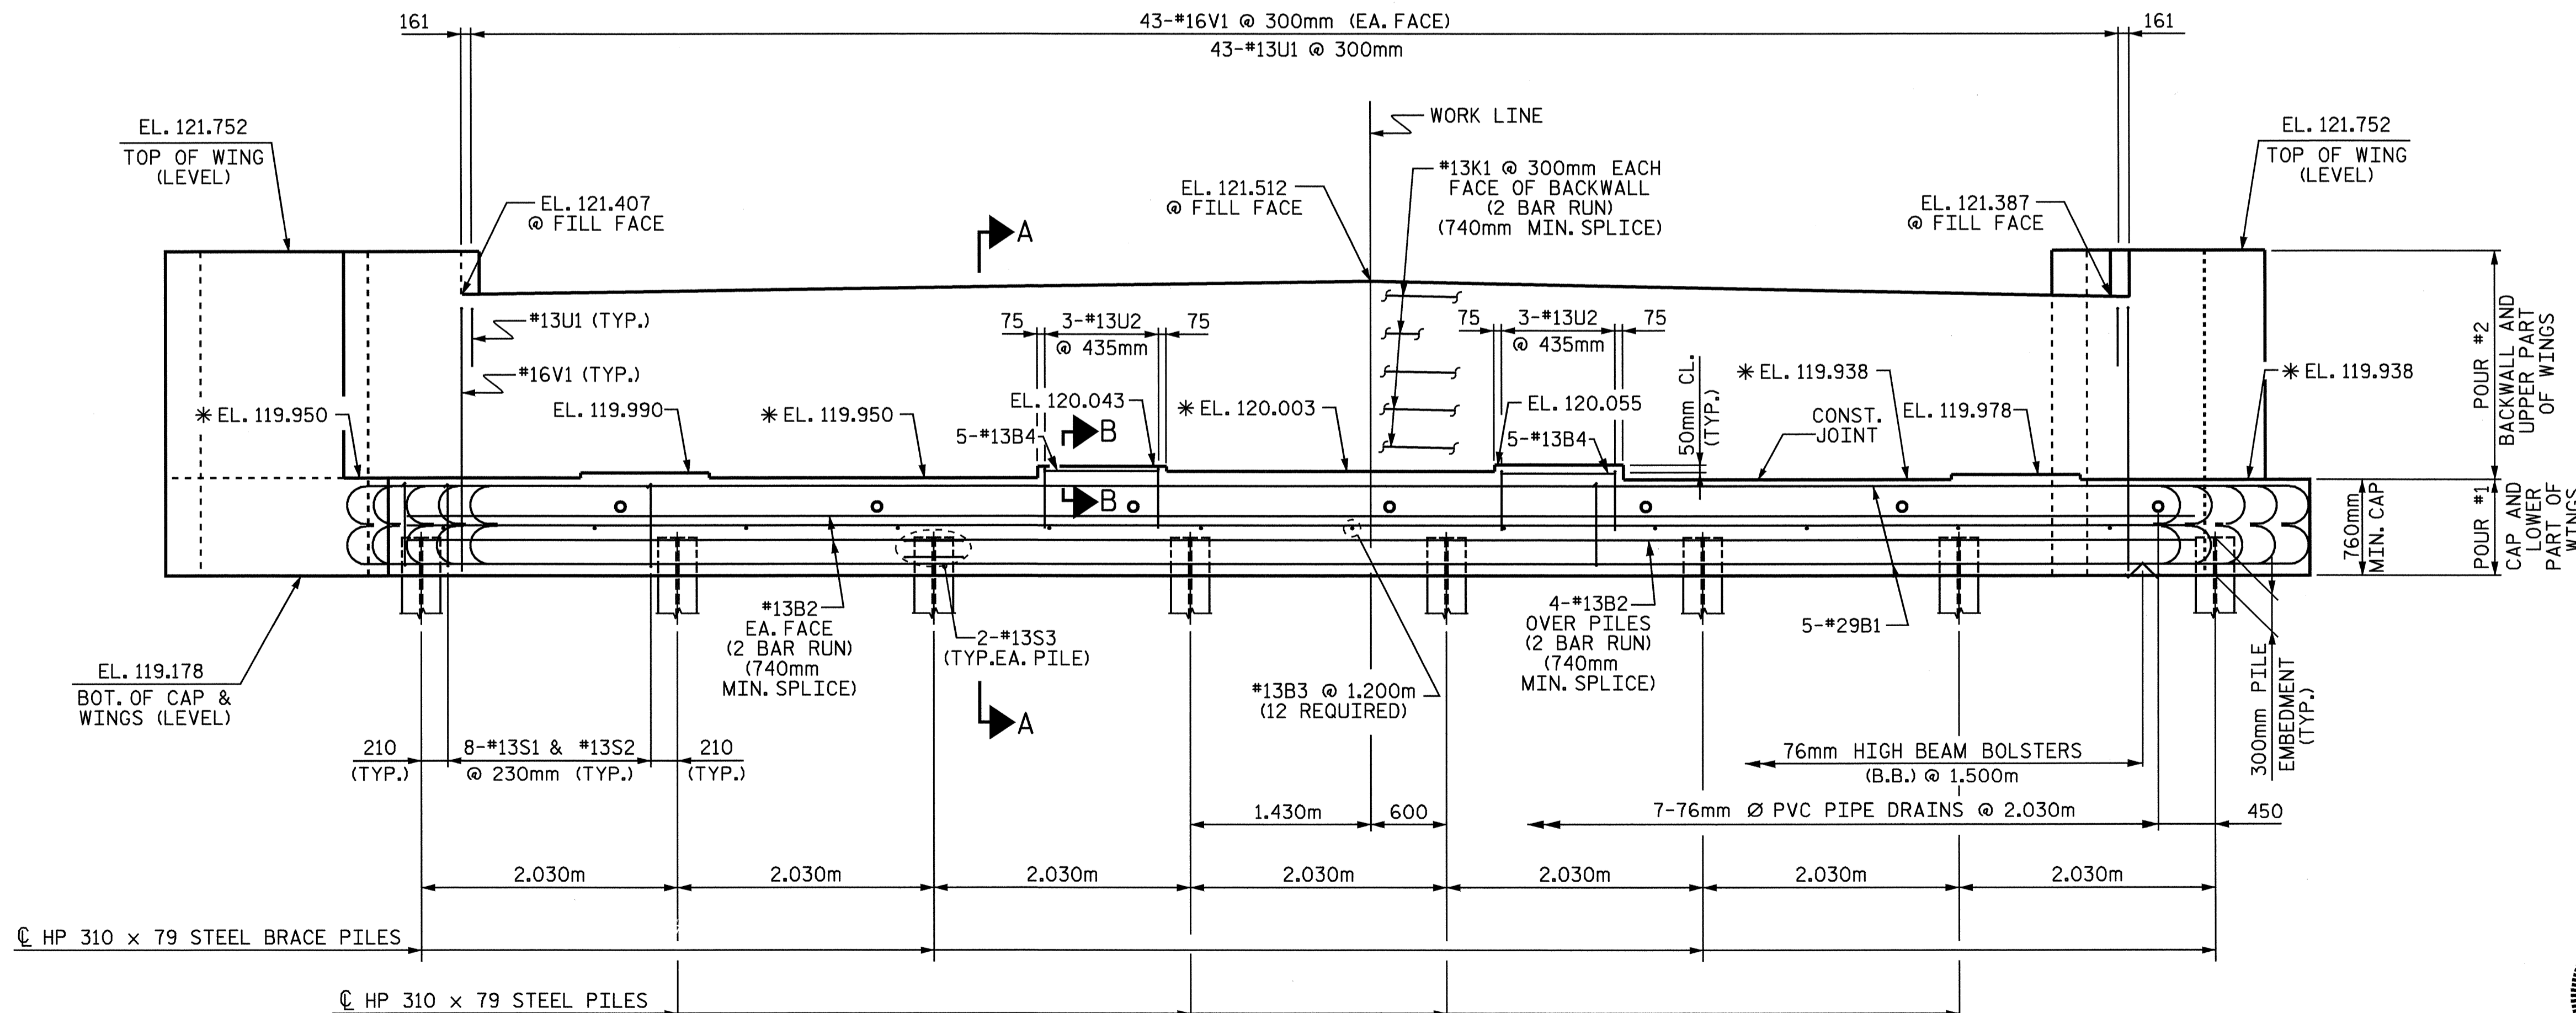

ELEVATION

* FOR LOCATION OF THESE ELEVATIONS SEE SECTION "A-A" SHEET 3 OF 3.

PROJECT NO. R-2610B
CHATHAM COUNTY
STATION: 22+83.400-L-

SHEET 1 OF 3

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

**SUBSTRUCTURE
END BENT #2**



REVISIONS						SHEET NO.
NO.	BY	DATE	NO.	BY	DATE	S-24
1			3			TOTAL SHEETS
2			4			60

DRAWN BY : H.T. BARBOUR DATE : 5-20-04
CHECKED BY : S.P. LAM DATE : 6-9-04

02-JUL-2004 10:05
w:\squad\r2610b\tbarbour\Microstation\strconcrete\R-2610B_sd.E*.01.dgn
adavenport

STR. #1