Docusign Envelope ID: A67EE47E-C60F-4862-942C-F096D74229D6

PROJECT REFERENCE NO.	SHEET NO.
R-5600	Sig-40.1

18 CHANNEL IP CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

REMOVE DIODE JUMPERS
1-3, 1-5, 1-6, 1-9, 1-10, 1-11, 1-12, 2-5, 2-6, 2-9, 2-11, 2-12, 2-18, 3-5, 3-6, 3-9, 3-10, 3-11, 3-12, 4-8, 4-10, 4-12, 5-9, 5-10, 5-11, 5-12, 5-18, 6-9, 6-10, 6-11, 6-18, 8-10, 8-12, 9-10, 9-11, 9-12, 9-18, 10-11, 10-12, 11-12, 11-18 AND 12-18.

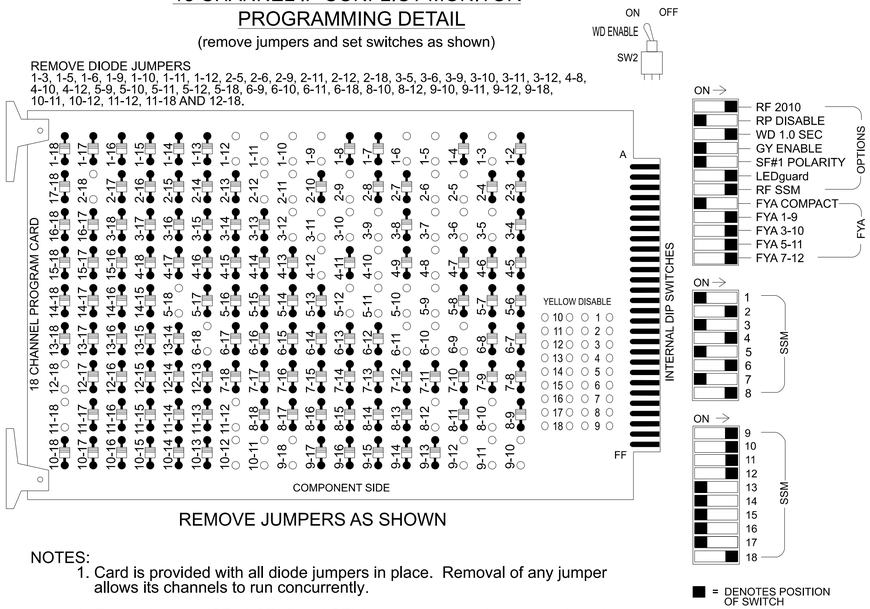

REMOVE JUMPERS AS SHOWN

NOTES:
1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that the Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the signal plan.
2. Program phases 4 and 8 for Dual Entry.
3. If this signal will be managed by an ATMS software, enable controller and detector logging for all detectors used at this location.
4. Program controller to start up in phase 2 Green No Walk and 6 Green No Walk.
5. The cabinet and controller are part of the NC 107 Time Based System.

EQUIPMENT INFORMATION

Controller.....2070LX
Cabinet.....332 w/ Aux
Software.....Q-Free MAXTIME
Cabinet Mount.....Base
Output File Positions.....18 With Aux. Output File
Load Switches Used.....S1, S2, S4, S5, S7, S8, S11
AUX S1, AUX S2, AUX S4, AUX S5, AUX S6
Phases Used.....1, 2, 4, 5, 6, 8
Overlap "1".....*
Overlap "2".....*
Overlap "3".....*
Overlap "4".....*
Overlap "5".....NOT USED
Overlap "6".....*
Overlap "7".....*

*See overlap programming detail on sheet 2.

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	OL7	4	4 PED	5	6	6 PED	7	8	8 PED	OL1	OL2	SPARE	OL3	OL4	OL6
SIGNAL HEAD NO.	11★	21,22	NU	83★	41,42	NU	51★	61,62	NU	NC	81,82	NU	11★	83★	NU	51★	43★	23★
RED		128			101			134			107			A124			A101	A104
YELLOW	*	129		*	102		*	135			108							
GREEN		130			103			136			109							
RED ARROW													A121			A114		
YELLOW ARROW													A122	A125		A115	A102	A105
FLASHING YELLOW ARROW													A123	A126		A116	A103	A106
GREEN ARROW	127			118			133											
✋																		
🚶																		

NU = Not Used NC = Not Connected
* Denotes install load resistor. See load resistor installation detail this sheet.
★ See pictorial of head wiring in detail this sheet.

FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

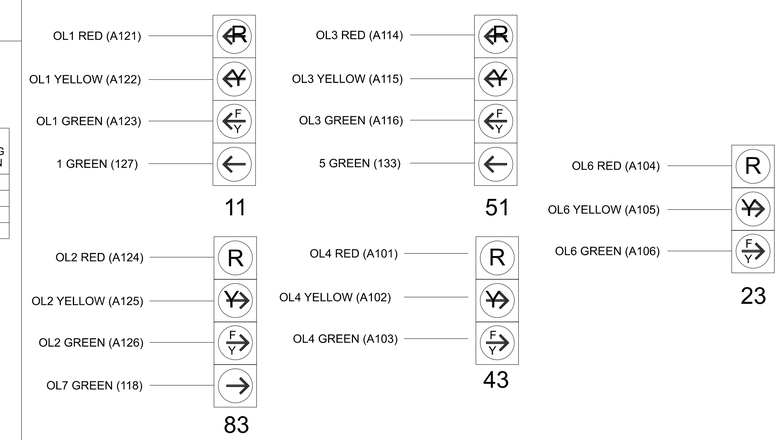

INPUT FILE POSITION LAYOUT

(front view)

		1	2	3	4	5	6	7	8	9	1O	11	12	13	14
FILE "I"	U	Ø 1 1A	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	FS DC ISOLATOR
	L	NOT USED													ST DC ISOLATOR
FILE "J"	U	Ø 5 5A	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY	SLOT EMPTY
	L	NOT USED													

EX. : 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
ST = STOP TIME

Note: For Detection Zones 1A and 5A the equipment and slots reserved are typical for a NCDOT installation.

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT POINT	DETECTOR NO.	CALL PHASE	DELAY TIME	EXTEND TIME	EXTEND	ADDED INITIAL	CALL	DELAY DURING GREEN
1A	TB2-1,2	I1U	56	18	1	1	15.0		X		X	
				-	29	6			X		X	
5A	TB3-1,2	J1U	55	17	15	5	15.0		X		X	
				-	31	2			X		X	

INPUT FILE POSITION LEGEND: J2L
FILE J
SLOT 2
LOWER

LOAD RESISTOR INSTALLATION DETAIL

(install resistors as shown)

ACCEPTABLE VALUES	
Value (ohms)	Wattage
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)



SPECIAL DETECTOR NOTE

1. Install a multi-zone microwave detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer -approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.
2. For Detection Zones 1A and 5A, the equipement placement is typical for a NCDOT installation.

Plans Prepared By:

DRMP
DRMP, INC.
8210 UNIVERSITY EXECUTIVE PARK DR.
SUITE 220
CHARLOTTE, NC 28262
NC LICENSE NO. F-1524 (704) 549-4260

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 14-0790T3
DESIGNED: Oct 2025
SEALED: 10/1/2025
REVISED: N/A

Electrical Detail - Sheet 1 of 2
Temporary Design 3 - TMP Ph2, S1

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

ELECTRICAL AND PROGRAMMING DETAILS FOR:

NC 107
at
SR 1724 (Fairview Road) /
CVS Driveway

Division 14 Jackson County Sylva

PLAN DATE:	October 2025	REVIEWED BY:	ZM Esposito
PREPARED BY:	DS Griffith	REVIEWED BY:	BN Groome

REVISIONS	INIT.	DATE

750 N.Greenfield Pkwy,Garner,NC 27529

SEAL 052936 NORTH CAROLINA PROFESSIONAL ENGINEER BRITTANY N GROOME

Signed by: Brittany Groome 1E09340E1094484... 10/1/2025 DATE

SIG. INVENTORY NO. 14-0790T3

1-OCT-2025 12:26
pw:\\pwdenver.bentley.com:PWDR_US_East_01\Documents\NCDOT\NCDOT_Western_Div_On-Call_ML_\NCDOT_6170_R5600_NC170_US23BUS\6.0_CAD_BIM\6.2_Work_In_Progress\R-5600 NCDOT File Structure\Traffic\Signals\Design\Signal Management\14-0790\14-0790T3_sm_ele_2025mmdd.dgn
Fernando.Vazquez AT CHA\FVAZQUEZ