

TIP NO. U-3462	SHEET NO. SIGN-1
APPROVED: <i>[Signature]</i>	
DATE: 9/10/08	
SEAL	




**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION**

**SIGNING PLANS
BRUNSWICK COUNTY**

LOCATION: SHALLOTTE - SRI357 (SMITH AVE.) AT NC 130

CONTRACT: C202027 T.I.P.: U-3462

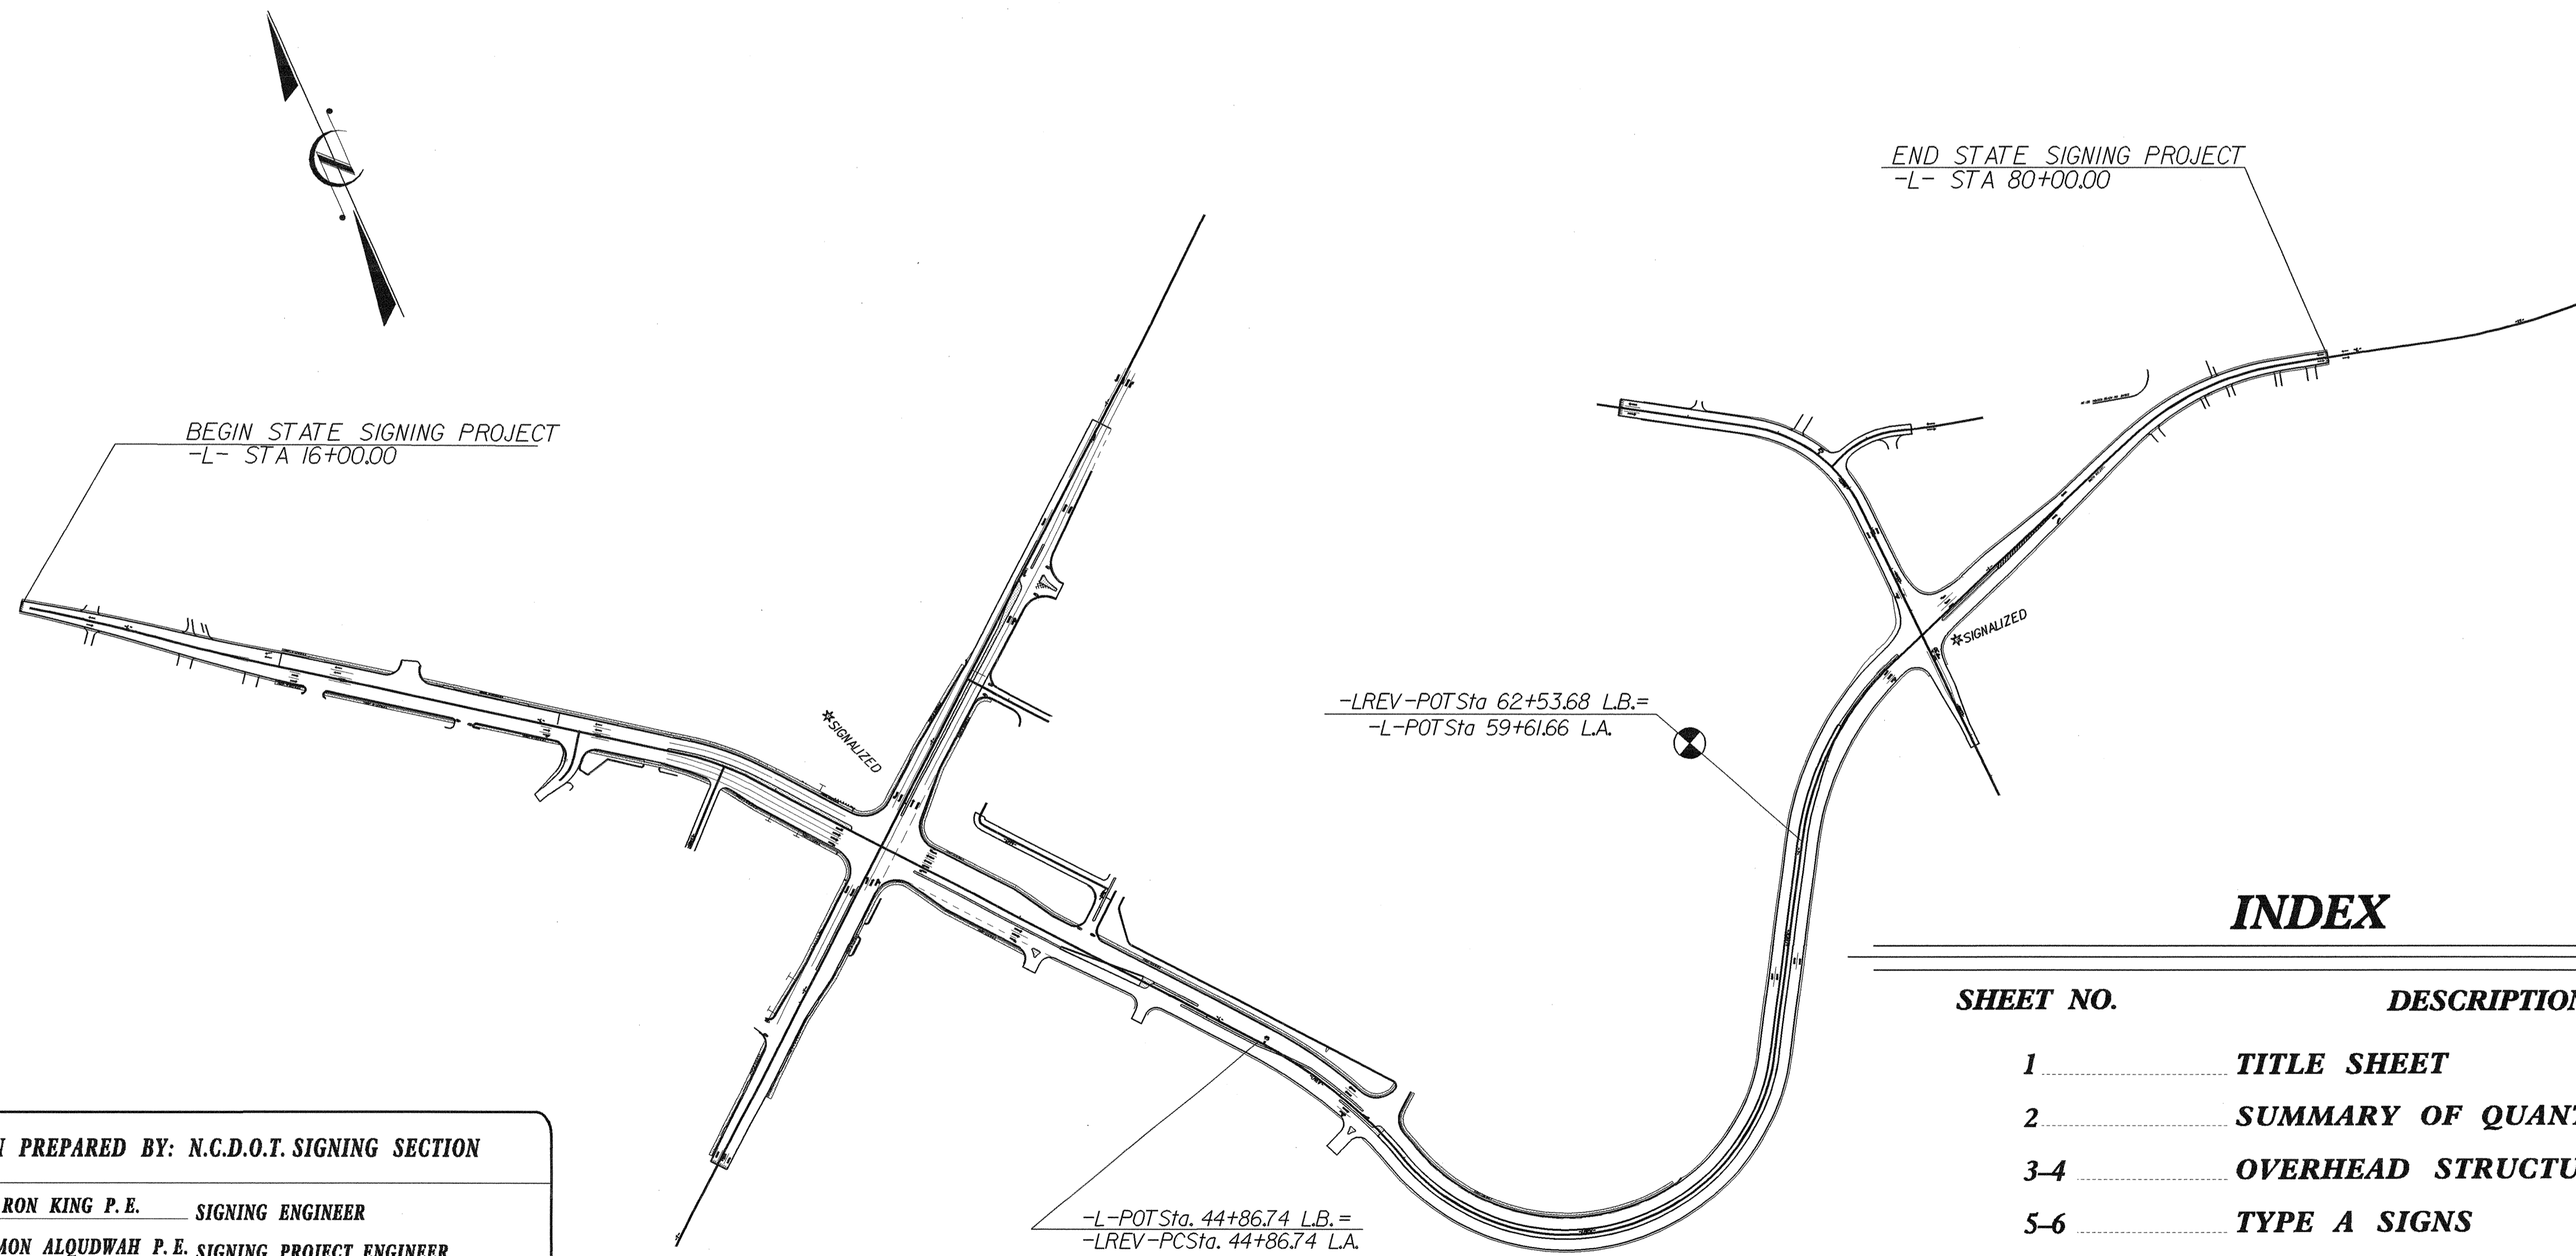

PLAN PREPARED BY: N.C.D.O.T. SIGNING SECTION

RON KING P. E. SIGNING ENGINEER
 AYMON ALQUDWAH P. E. SIGNING PROJECT ENGINEER
 MITCH EATON SIGNING PROJECT DESIGN ENGINEER
 BARRY NOWLIN SIGNING DESIGNER


INDEX

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	SUMMARY OF QUANTITIES & NOTES
3-4	OVERHEAD STRUCTURE DRAWINGS
5-6	TYPE A SIGNS
7	TYPE D SIGNS
8	TYPE E SIGNS
9	TYPE F SIGNS
10	SIGN ROADWAY SHEETS

ROADWAY STANDARD DRAWINGS
APPLICABLE TO THESE SIGNING PLANS
904.10 904.50

10-SEP-2008 12:00 P:\TIP\Projects\U-3462\Traffic\Signing\CADD\Quantities & GM_Signs\U-3462seed.dgn meaton AT TEC221636

SIGNS SUMMARY OF QUANTITIES

TIP NO. U-3462	SHEET NO. SIGN-2
APPROVED: <i>[Signature]</i>	
DATE: 9/10/08	
SEAL	
	

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4057000000	SP	OVERHEAD FOOTING	24	C.Y.
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	984	L.F.
4082100000	SP	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STATION "33+00 -L-"	1	L.S.
4082100000	SP	SUPPORTS, OVERHEAD SIGN STRUCTURE AT STATION "36+75 -L-"	1	L.S.
4096000000	904	SIGN ERECTION, TYPE D	3	EA.
4102000000	904	SIGN ERECTION, TYPE E	56	EA.
4108000000	904	SIGN ERECTION, TYPE F	13	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	15	EA.

Pay Item Notes:	
1	DISPOSAL OF SIGN SYSTEM, U-CHANNEL


General Notes:

- . SIGNS FURNISHED BY STATE
- . ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . SIGNING PLANS DO NOT INCLUDE TEMPORARY CONSTRUCTION SIGNING OR PAVEMENT MARKINGS. SEE TRAFFIC CONTROL PLANS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE GRADE C RETRO-REFLECTIVE SHEETING.


**SUMMARY OF QUANTITIES
AND NOTES**

STATE	PROJECT NO.	SHEET NO.	TOTAL SHTS.
N. C.	U-3462	SIGN-3	

APPROVED: *[Signature]*
DATE: 9/10/08

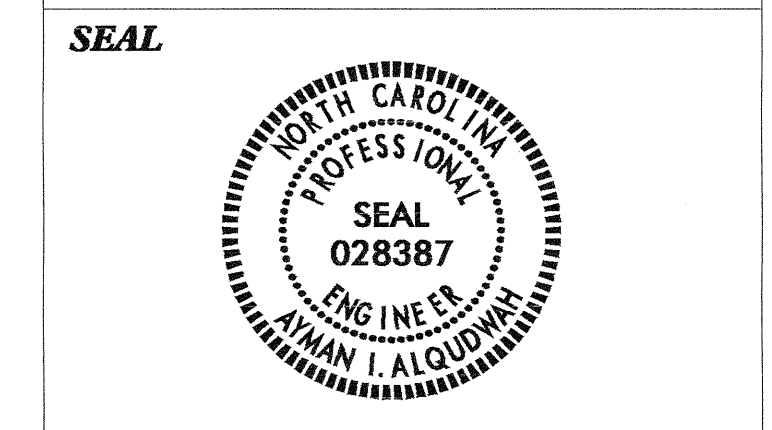

* THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTING. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 130 M.P.H.

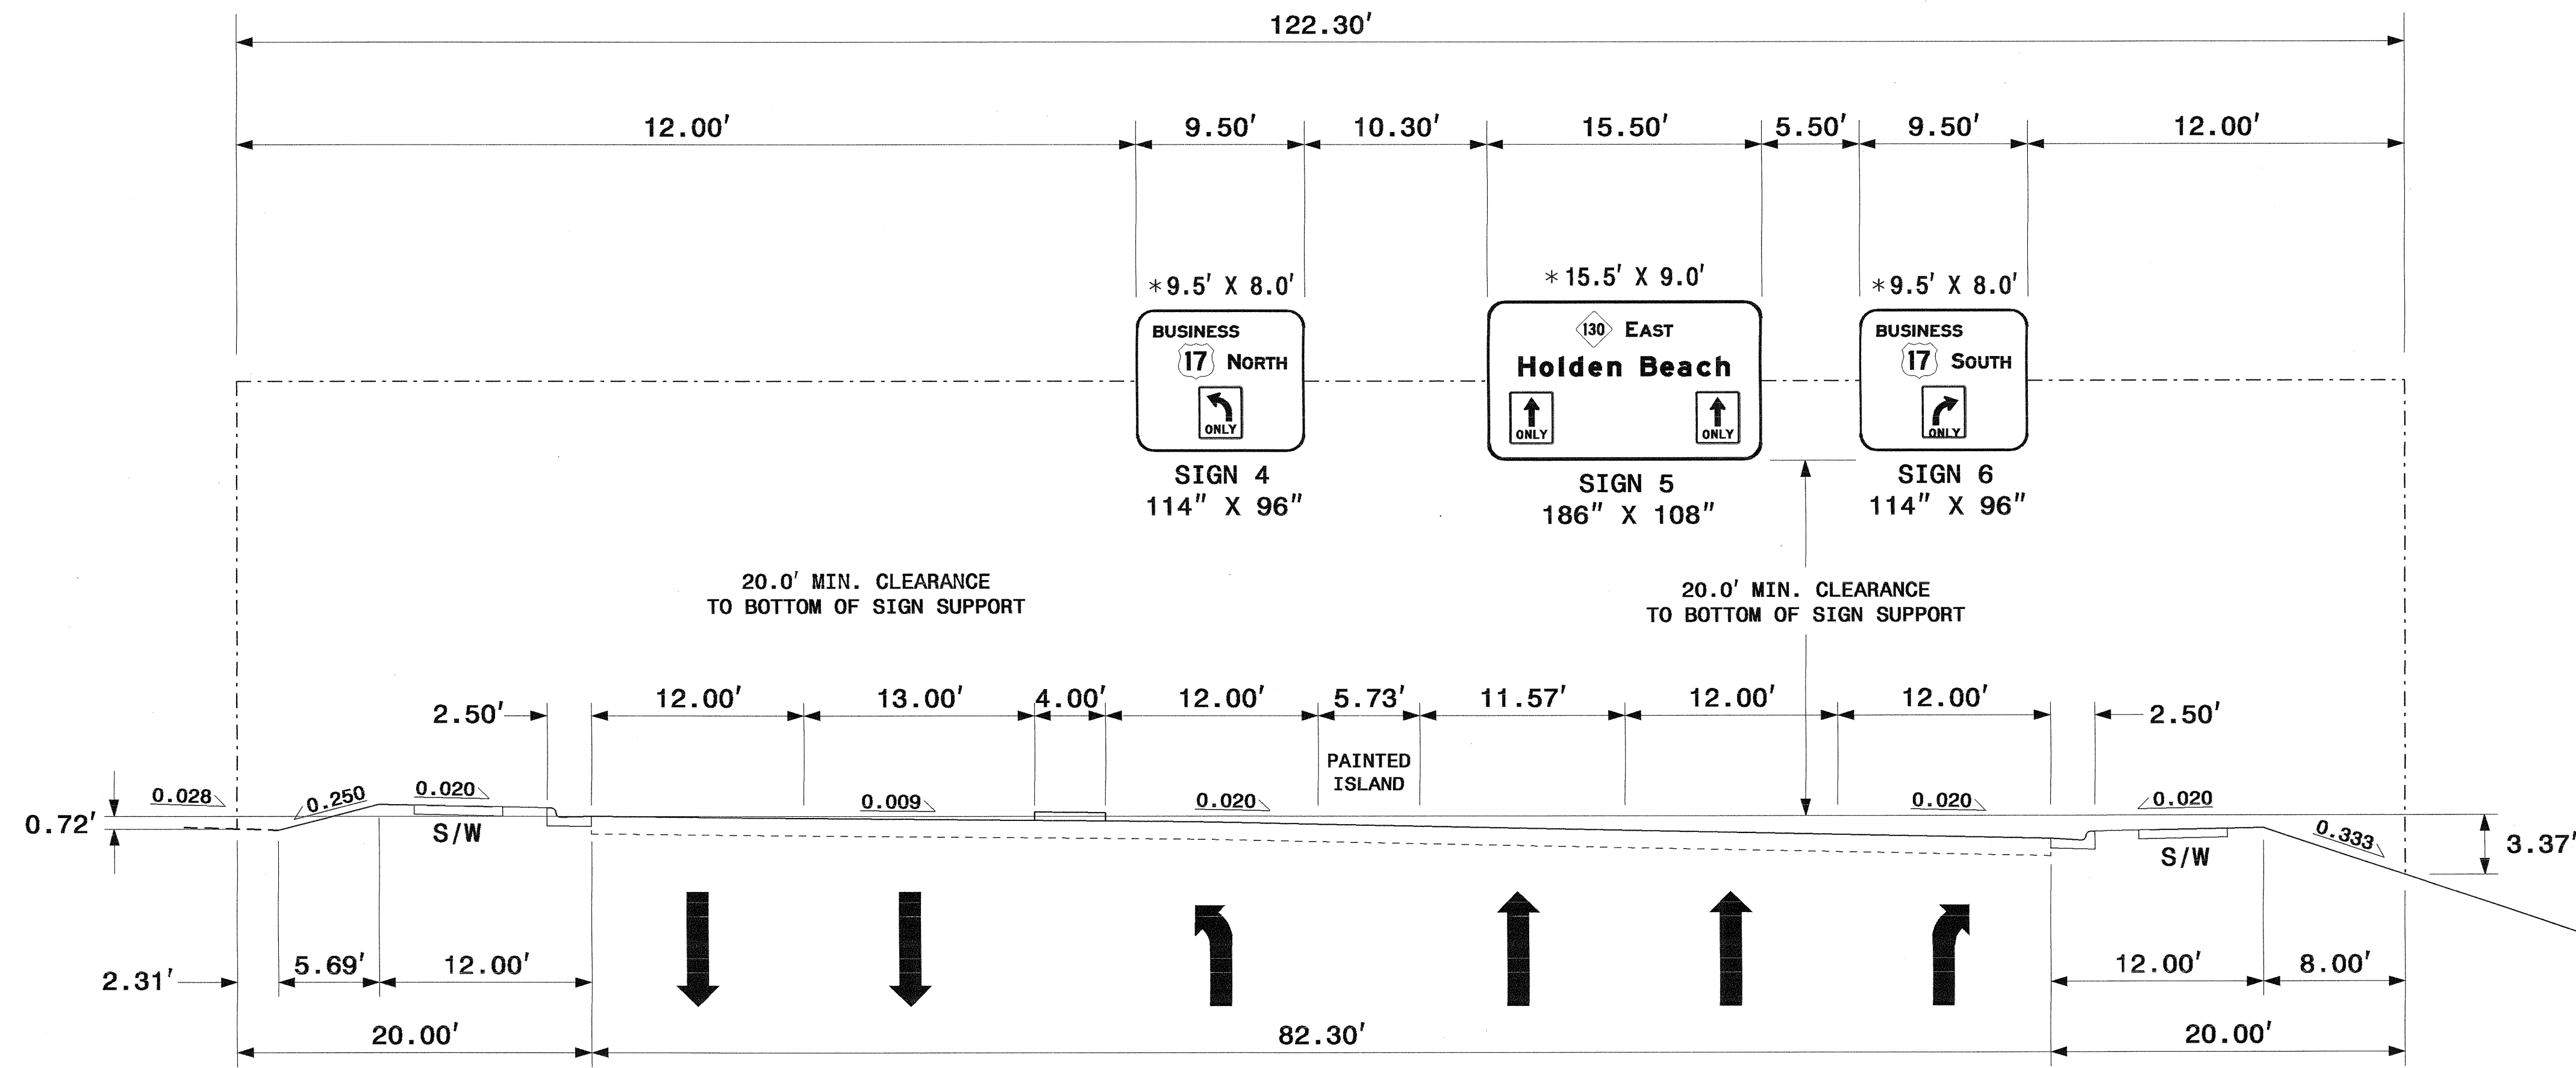

NOTES:

- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 6" AND NOT MORE THAN 24" ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THE PLANS, INCLUDING THOSE DESIGNATED AS "FUTURE".

SIGNS FURNISHED BY STATE


OVERHEAD SIGN ASSEMBLY AT STA. 33+00 -L-		
SCALE	NONE	N. C. DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS TRAFFIC ENGINEERING BRANCH
DATE	9/2008	
DWG. BY	DME	
DESIGN BY	DME	
APPROVED	AIA	
		REVISIONS

STATE	PROJECT NO.	SHEET NO.	TOTAL SHTS.
N.C.	U-3462	SIGN-4	

APPROVED: *[Signature]*
DATE: 9/10/08

SEAL

* THESE DIMENSIONS SHALL BE USED FOR WIND LOAD AND DEAD LOAD COMPUTATIONS IN DESIGN OF STRUCTURE AND FOOTING. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 130 M.P.H.

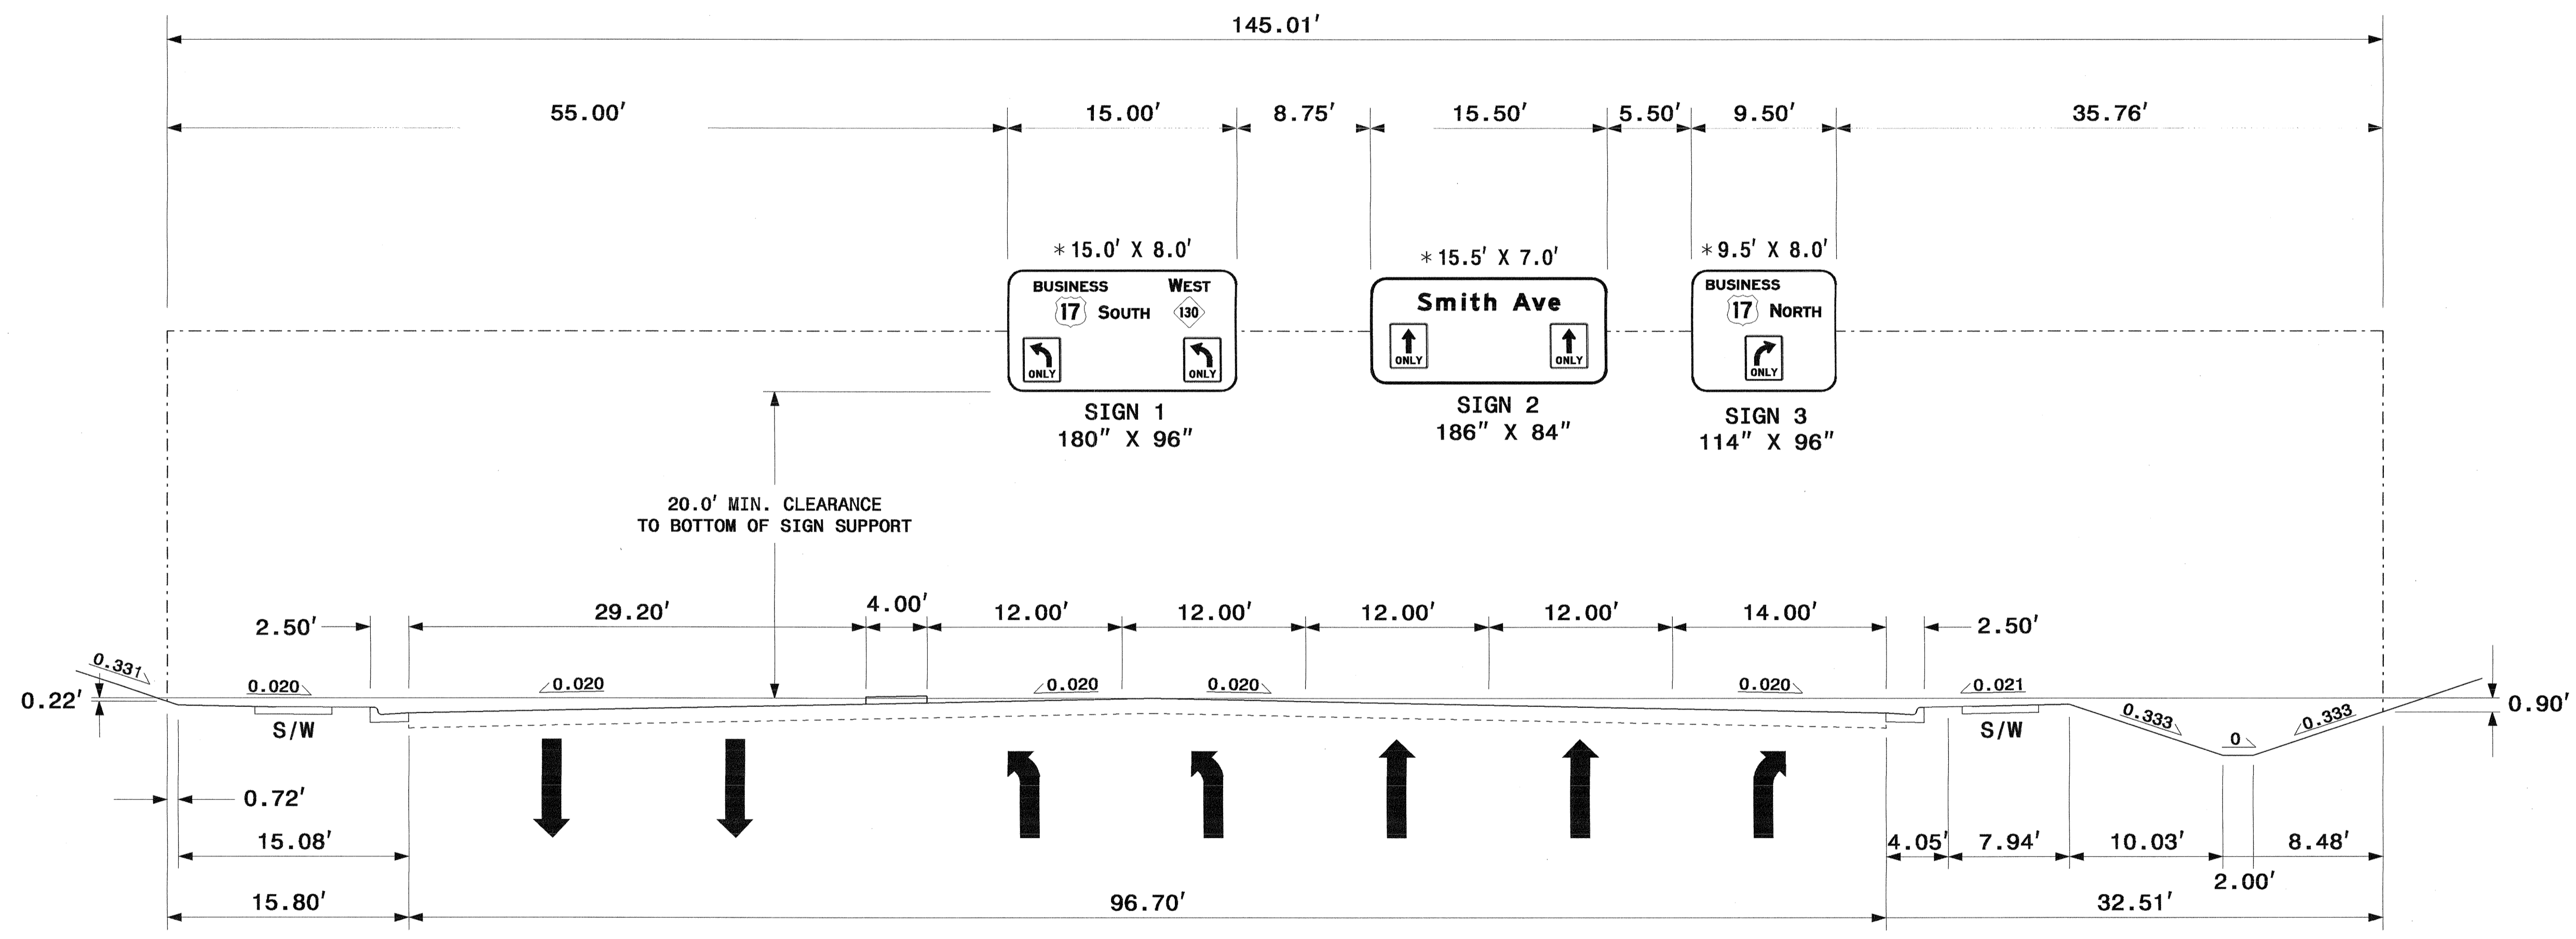


NOTES:

- IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES.
- THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 6" AND NOT MORE THAN 24" ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THE PLANS, INCLUDING THOSE DESIGNATED AS "FUTURE".

SIGNS FURNISHED BY STATE

**OVERHEAD SIGN ASSEMBLY
AT STA. 36+75 -L-**

SCALE	NONE	N. C. DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS TRAFFIC ENGINEERING BRANCH	REVISIONS
DATE	9/2008		
DWG. BY	DME		
DESIGN BY	DME		
APPROVED	AIA		

TIP NO. U-3462	SHEET NO. SIGN-5
APPROVED: <i>[Signature]</i>	
DATE: 9/10/08	
SEAL	
	

SIGN NUMR: 1
TYPE: A Overhead
QUANTITY: 1
SIGN WIDTH: 15'-0"
HEIGHT: 8'-0"
TOTAL AREA: 120.0 Sq.Ft.

BACKG. COLOR: Green
COPY COLOR: White

DESIGN BY: DME
PROJECT ID: U-3462

CHK BY: DIV: 3


STD #: N/A
DATE: Sep 09, 2008

N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SYMBOL	X	Y	WID	HT
R1_4	37.7	50.8	24	24
NC243B	130.8	50.8	24	24
R3_SL	12	7.3	30	36
R3_SL	138	7.3	30	36

MAT'L: 0.125" ALUMINUM
BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADIUS: 12"
NO. Z BARS: 3
LENGTH: 172.0"

USE NOTES: 1,3,4
1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied Type I reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.

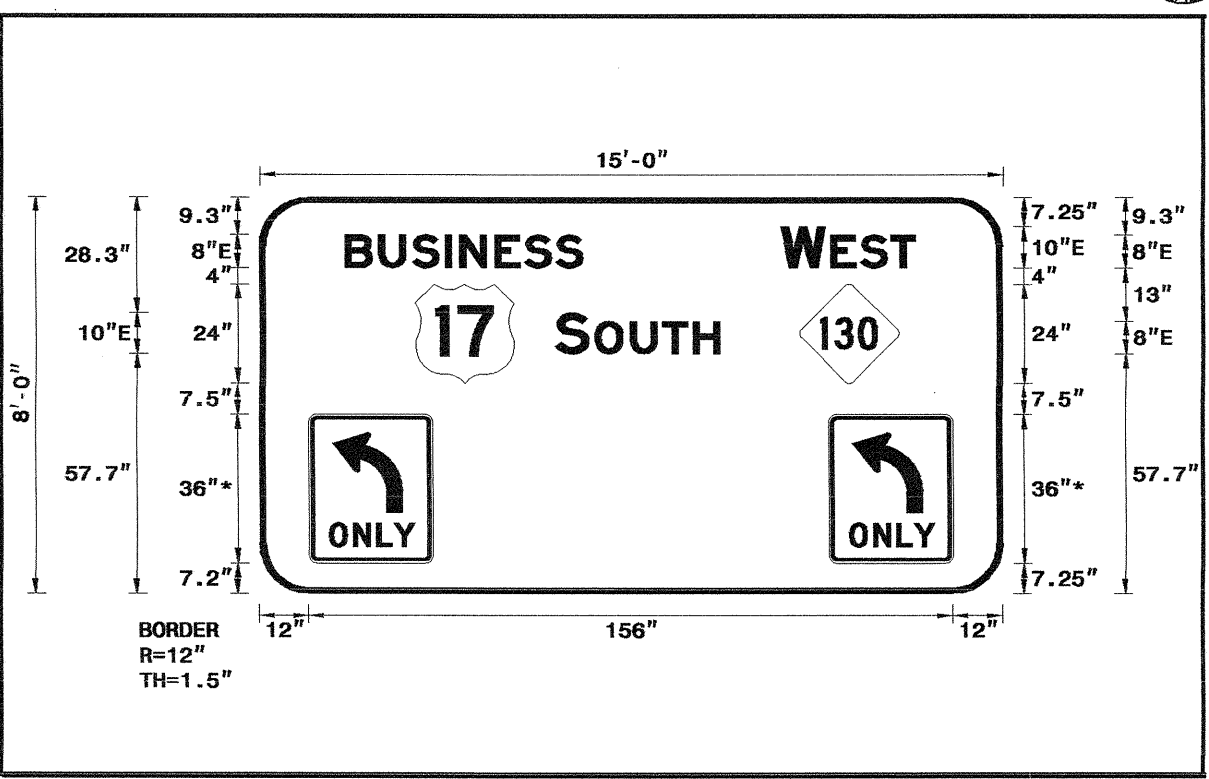

Letter spacings are to start of next letter

	B	U	S	I	N	E	S	S	Series/Size Text Length
	20.9	8.1	8.1	3.5	8.6	7.1	7.6	6.5	E 2000
									57.5
	W	E	S	T					E 2000
	126.5	10.6	1.4	7.1	7.4	6	20.9		32.5
									E 2000
	S	O	U	T	H				39.8
	71.7	8.1	1.5	8.6	7.8	7.4	6.5	68.5	

Spacing Factor is 1 unless specified otherwise
FILENAME: GSENG

SIGN NUMR: 3
TYPE: A Overhead
QUANTITY: 1
SIGN WIDTH: 9'-6"
HEIGHT: 8'-0"
TOTAL AREA: 78.0 Sq.Ft.

BACKG. COLOR: Green
COPY COLOR: White

DESIGN BY: DME
PROJECT ID: U-3462

CHK BY: DIV: 3


STD #: SSTN
DATE: Sep 10, 2008

N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SYMBOL	X	Y	WID	HT
R1_4	28.7	49.1	24	24
R3_SR	42	8.7	30	36

MAT'L: 0.125" ALUMINUM
BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADIUS: 12"
NO. Z BARS: 3
LENGTH: 106.0"

USE NOTES: 1,3,4
1. Legend and border shall be direct applied Grade A reflective sheeting.
2. Legend and border shall be direct applied Type I reflective sheeting.
3. Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
4. Background shall be Grade A reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.

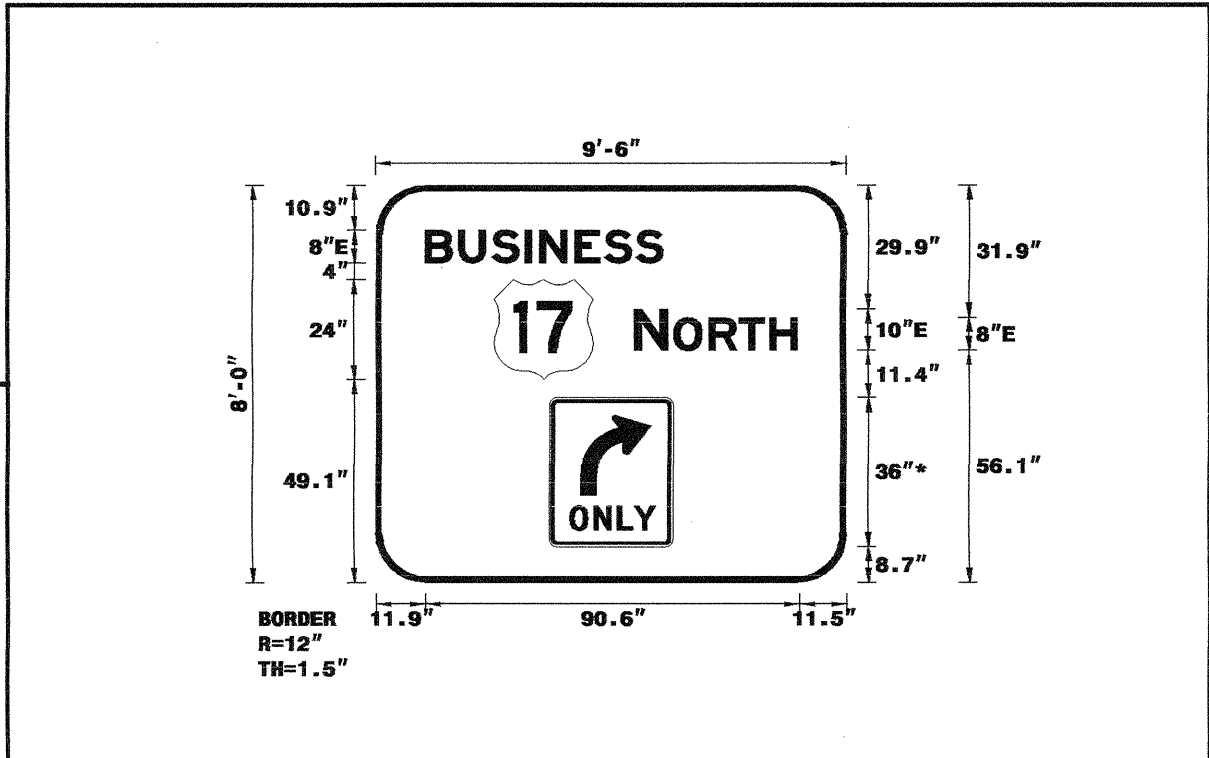

Letter spacings are to start of next letter

	B	U	S	I	N	E	S	S	Series/Size Text Length
	11.9	8.1	8.1	3.5	8.6	7.1	7.6	6.5	E 2000
									57.5
	N	O	R	T	H				E 2000
	62.7	8.1	1.5	8.6	7.4	7.4	6.5	11.9	39.4

Spacing Factor is 1 unless specified otherwise
FILENAME: GSENG

SIGN NUMR: 2
TYPE: A Overhead
QUANTITY: 1
SIGN WIDTH: 15'-6"
HEIGHT: 7'-0"
TOTAL AREA: 108.5 Sq.Ft.

BACKG. COLOR: Green
COPY COLOR: White

DESIGN BY: DME
PROJECT ID: U-3462

CHK BY: DIV: 3


STD #: SSTN
DATE: Sep 10, 2008

N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SYMBOL	X	Y	WID	HT
R3_SS	15	12.3	30	36
R3_SS	141	12.3	30	36

MAT'L: 0.125" ALUMINUM
BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 2"
RADIUS: 12"
NO. Z BARS: 0
LENGTH: 178.0"

USE NOTES: 1,4
1. Legend and border shall be direct applied Grade A reflective sheeting.
2. Legend and border shall be direct applied Type I reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" aluminum and demountable.
4. Background shall be Grade A reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.

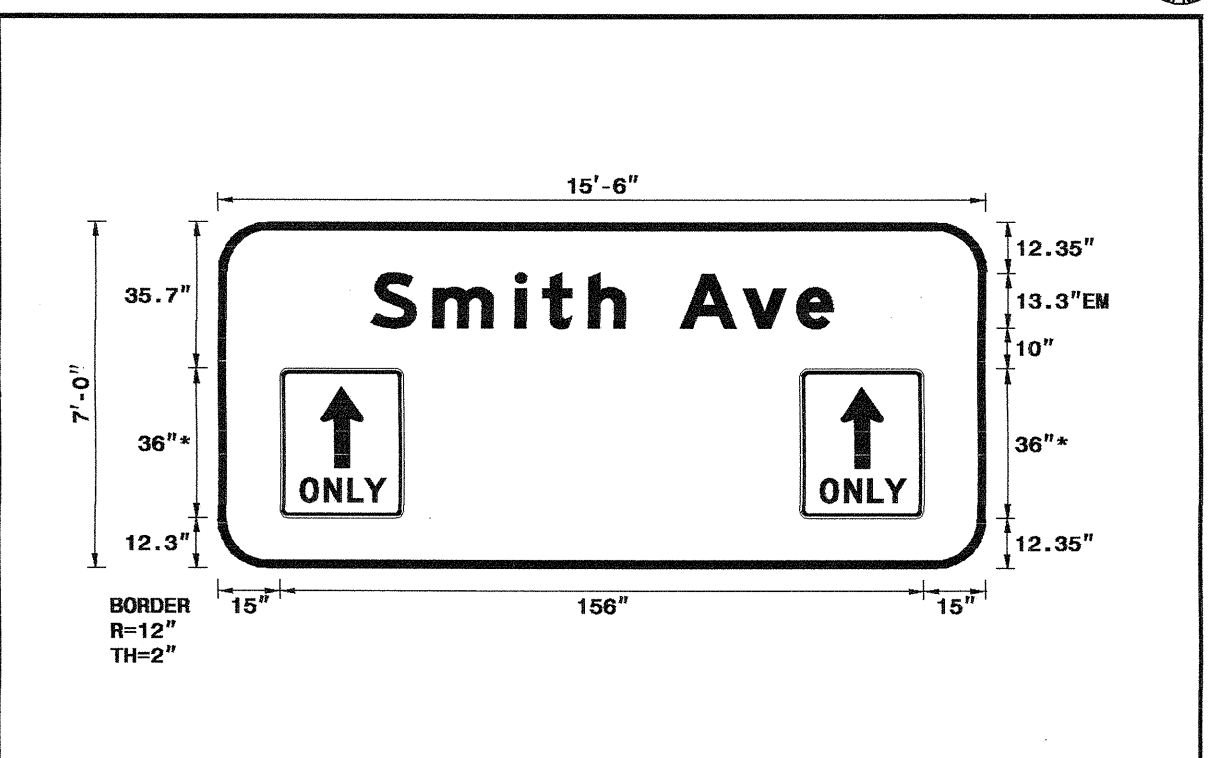


Letter spacings are to start of next letter

	S	m	i	t	h	A	v	e	Series/Size Text Length
	37.1	14.9	20	6.7	11.2	8.8	13.3	15.2	EM 2000
									111.8

Spacing Factor is 1 unless specified otherwise
FILENAME: GSENG

TYPE "A" SIGNS

I:\0-SEP-2008 13:59
 P:\TIPPROJ\GSENG\U-3462\Traffic\Sign Designs\U-3462_Sgn_designs_01.dgn
 meason AT 10/22/08

TIP NO.	SHEET NO.
U-3462	SIGN-6
APPROVED: <i>[Signature]</i>	
DATE: 9/10/08	
SEAL	
	

SIGN NUMR: 4
TYPE: A Overhead
QUANTITY: 1

BACKG. COLOR: Green
COPY COLOR: White

DESIGN BY: DME
PROJECT ID: U-3462

CHK BY: DIV: 3

STD #: \$STN
DATE: Sep 10, 2008


N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SIGN WIDTH: 9'-6"
HEIGHT: 8'-0"
TOTAL AREA: 76.0 Sq.Ft.

SYMBOL	X	Y	WID	HT
M1_4	28.7	49.1	24	24
R3_SL	42	8.6	30	36

MAT'L: 0.125" ALUMINUM

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADI: 12"
NO. Z BARS: 3
LENGTH: 106.0"

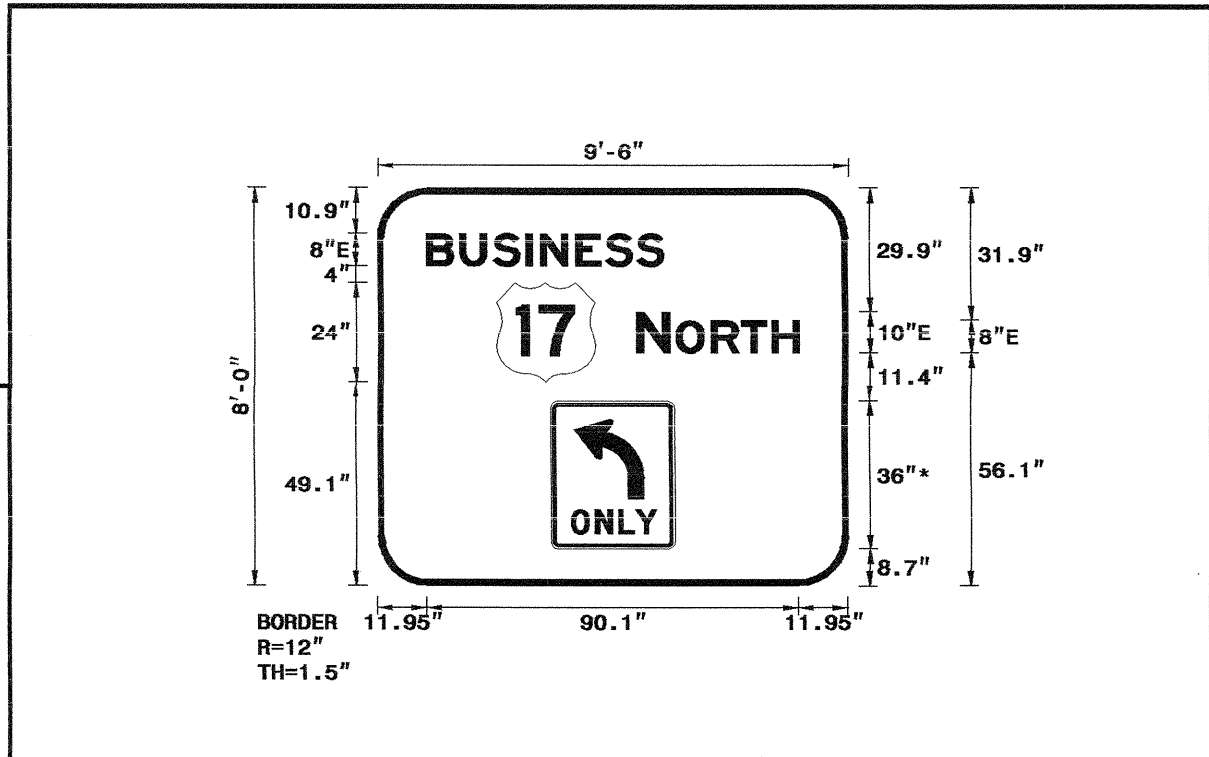

USE NOTES: 1,3,4
1. Legend and border shall be direct applied Grade A reflective sheeting.
2. Legend and border shall be direct applied Type I reflective sheeting.
3. Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
4. Background shall be Grade A reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.

Letter spacings are to start of next letter

B U S I N E S S											Series/Size
											Text Length
11.9	8.1	8.1	8.1	3.5	8.6	7.1	7.6	6.5	44.5		E 2000
											57.5
N O R T H											Series/Size
62.7	8.1	1.5	8.6	7.4	7.4	6.5	11.9				E 2000
											39.4

Spacing Factor is 1 unless specified otherwise
FILENAME: GSENG

SIGN NUMR: 6
TYPE: A Overhead
QUANTITY: 1

BACKG. COLOR: Green
COPY COLOR: White

DESIGN BY: DME
PROJECT ID: U-3462

CHK BY: DIV: 3

STD #: \$STN
DATE: Sep 10, 2008


N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SIGN WIDTH: 9'-6"
HEIGHT: 8'-0"
TOTAL AREA: 76.0 Sq.Ft.

SYMBOL	X	Y	WID	HT
M1_4	28.7	49.1	24	24
R3_SL	42	8.6	30	36

MAT'L: 0.125" ALUMINUM

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADI: 12"
NO. Z BARS: 3
LENGTH: 106.0"

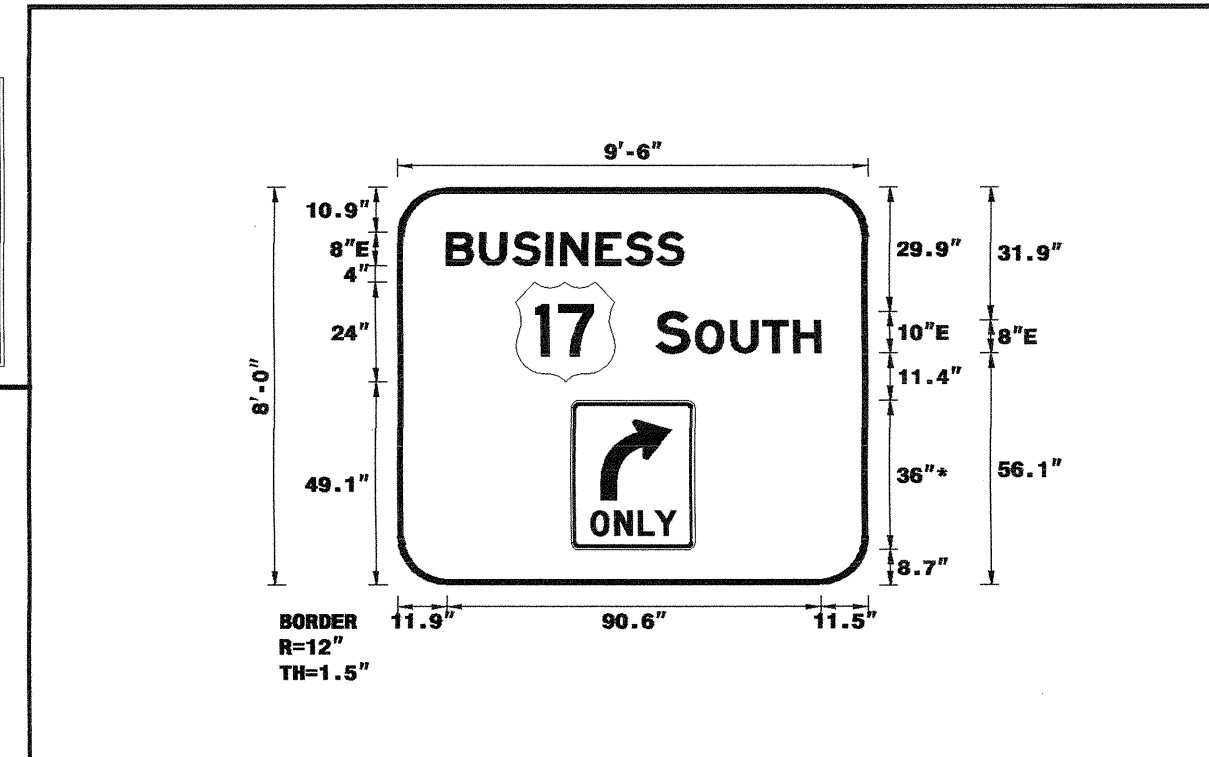

USE NOTES: 1,3,4
1. Legend and border shall be direct applied Grade A reflective sheeting.
2. Legend and border shall be direct applied Type I reflective sheeting.
3. Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
4. Background shall be Grade C reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.

Letter spacings are to start of next letter

B U S I N E S S											Series/Size
											Text Length
11.9	8.1	8.1	8.1	3.5	8.6	7.1	7.6	6.5	44.5		E 2000
											57.5
S O U T H											Series/Size
62.7	8.1	1.5	8.6	7.8	7.4	6.5	11.5				E 2000
											39.8

Spacing Factor is 1 unless specified otherwise
FILENAME: GSENG

SIGN NUMR: 5
TYPE: A Overhead
QUANTITY: 1

BACKG. COLOR: Green
COPY COLOR: White

DESIGN BY: DME
PROJECT ID: U-3462

CHK BY: DIV: 3

STD #: \$STN
DATE: Sep 10, 2008


N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SIGN WIDTH: 15'-6"
HEIGHT: 9'-0"
TOTAL AREA: 139.5 Sq.Ft.

SYMBOL	X	Y	WID	HT
NC243B	60.3	76.5	24	24
R3_SL	15	11	30	36
R3_SL	141	11	30	36

MAT'L: 0.125" ALUMINUM

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 2"
RADI: 12"
NO. Z BARS: 3
LENGTH: 178.0"

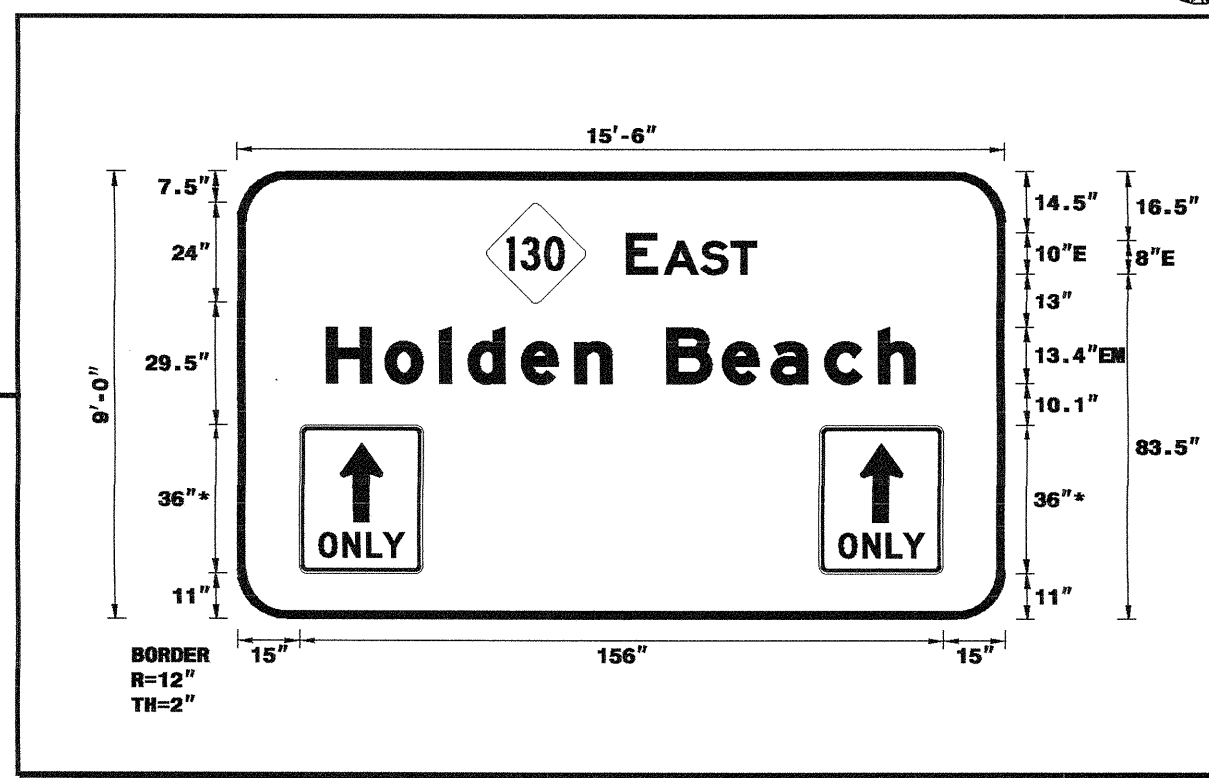

USE NOTES: 1,3,4
1. Legend and border shall be direct applied Grade A reflective sheeting.
2. Legend and border shall be direct applied Type I reflective sheeting.
3. Shields shall be Grade A reflective sheeting on 0.032" aluminum and demountable.
4. Background shall be Grade A reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.


Letter spacings are to start of next letter

E A S T											Series/Size		
											Text Length		
94.3	7.5	1.5	9	7.4	6	60.3					E 2000		
											31.4		
H o l d e n B e a c h											Series/Size		
21.7	14.2	13.3	6.8	13	13	8.8	13.4	11.8	13	13	8.8	21.7	EM 2000
											142.6		

Spacing Factor is 1 unless specified otherwise
FILENAME: GSENG

TYPE "A" SIGNS

10-SEP-2008 12:22 P:\TIP-projects\U-3462\Traffic\Signing\CADD\Sign Designs\U-3462_Sign_designs_01.dgn meston AT EC221656

TIP NO. U-3462	SHEET NO. SIGN-7
APPROVED: <i>[Signature]</i>	
DATE: 9/10/08	
SEAL	
	


SIGN NUMR: 301 BACKG. COLOR: Green DESIGN BY: B. Nowlin CHK BY: STD #: \$STN N. C. DEPARTMENT OF TRANSPORTATION
TYPE: D Ground COPY COLOR: White PROJECT ID: U-3462 DIV: 3 DATE: Sep 10, 2008 DIVISION OF HIGHWAYS
QUANTITY: 1 TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SIGN WIDTH: 7'-6"
HEIGHT: 2'-0"
TOTAL AREA: 15.0 Sq.Ft.

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" ALUMINUM
BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.75"
RADI: 3"
NO. Z BARS:
LENGTH: mm/"

USE NOTES: 1,4
1. Legend and border shall be direct applied Grade C reflective sheeting.
2. Legend and border shall be direct applied Type I reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" aluminum and demountable.
4. Background shall be Grade C reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.

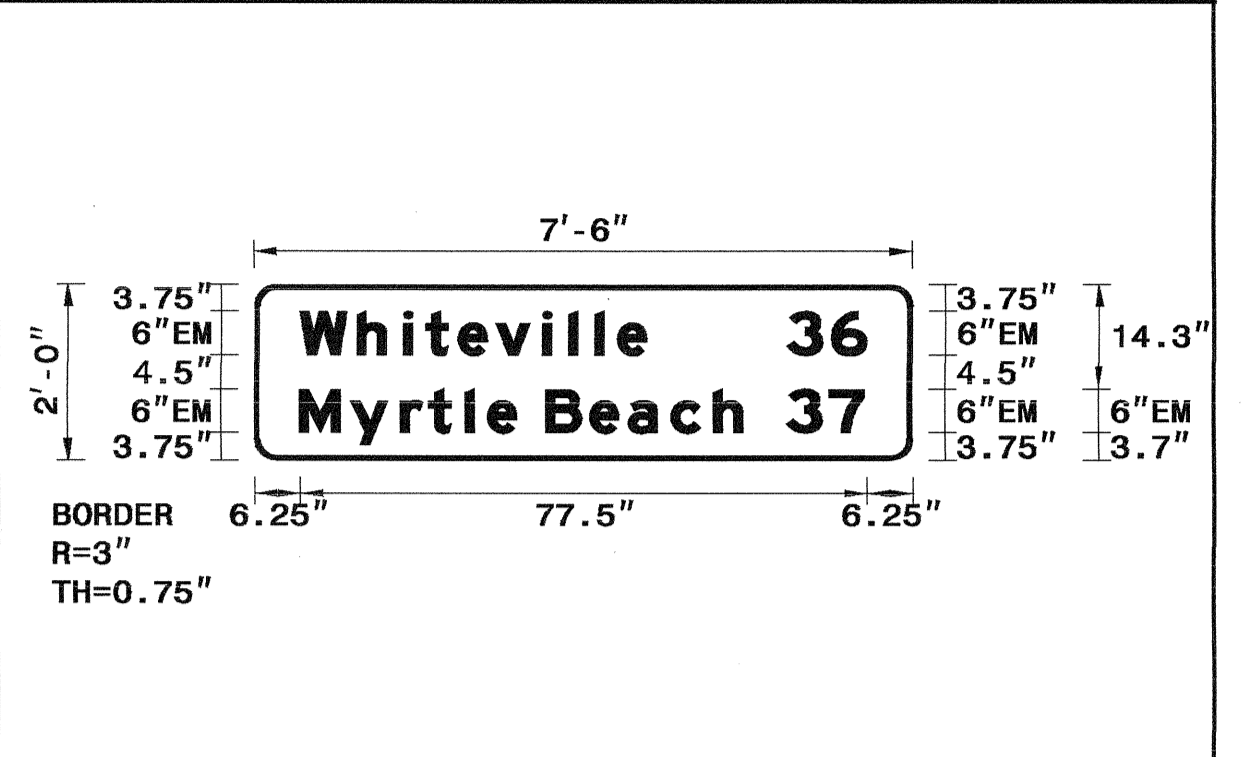

Letter spacings are to start of next letter

Series/Size	Text	Length
EM 2000	Whiteville 36 Myrtle Beach 37	47.4
EM 2000	36	10.9
EM 2000	Myrtle Beach	60.6
EM 2000	37	10.7

Spacing Factor is 1 unless specified otherwise
FILENAME: GSENG


SIGN NUMR: 303 BACKG. COLOR: Green DESIGN BY: B. Nowlin CHK BY: M. Eaton STD #: \$STN N. C. DEPARTMENT OF TRANSPORTATION
TYPE: D Ground COPY COLOR: White PROJECT ID: U-3462 DIV: 3 DATE: Sep 10, 2008 DIVISION OF HIGHWAYS
QUANTITY: 1 TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SIGN WIDTH: 4'-6"
HEIGHT: 2'-0"
TOTAL AREA: 9.0 Sq.Ft.

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" ALUMINUM
BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.75"
RADI: 3"
NO. Z BARS:
LENGTH: mm/"

USE NOTES: 1,4
1. Legend and border shall be direct applied Grade C reflective sheeting.
2. Legend and border shall be direct applied Type I reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" aluminum and demountable.
4. Background shall be Grade C reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.

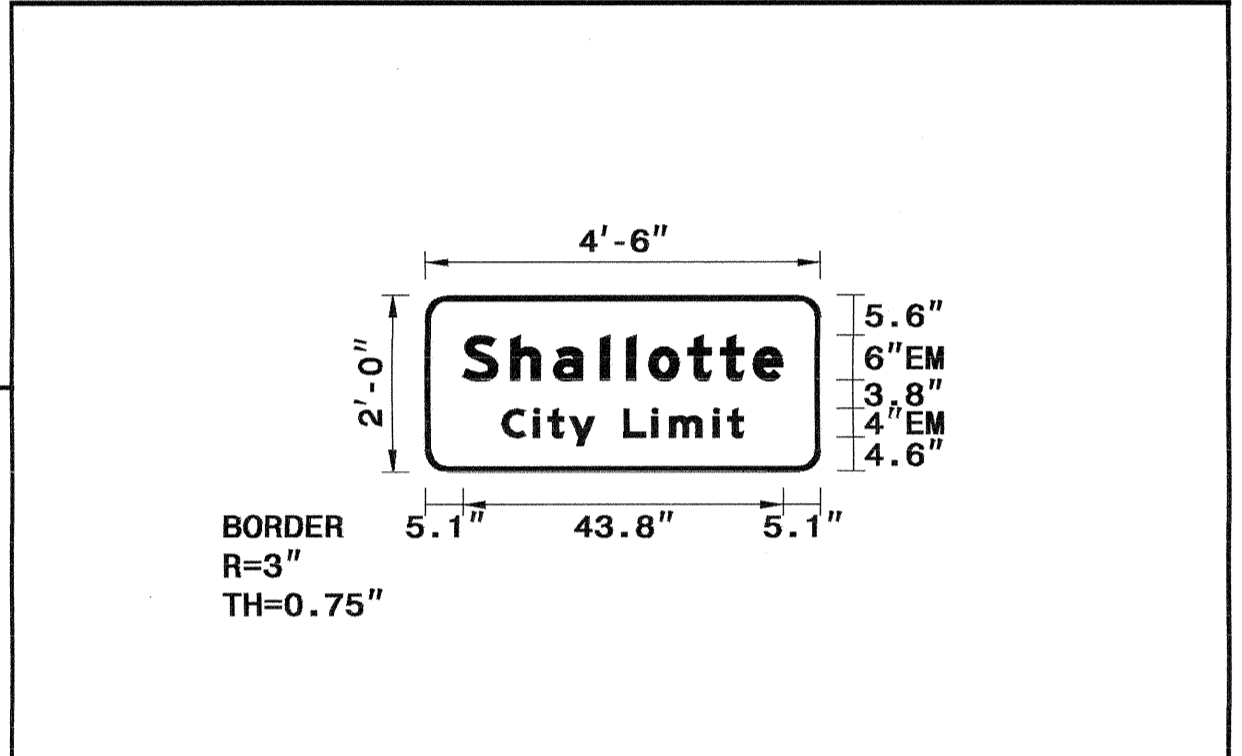

Letter spacings are to start of next letter

Series/Size	Text	Length
EM 2000	Shallotte City Limit	43.8
EM 2000	City Limit	33

Spacing Factor is 1 unless specified otherwise
FILENAME: GSENG


SIGN NUMR: 302 BACKG. COLOR: Green DESIGN BY: B. Nowlin CHK BY: M. Eaton STD #: \$STN N. C. DEPARTMENT OF TRANSPORTATION
TYPE: D Ground COPY COLOR: White PROJECT ID: U-3462 DIV: 3 DATE: Sep 10, 2008 DIVISION OF HIGHWAYS
QUANTITY: 1 TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SIGN WIDTH: 7'-6"
HEIGHT: 2'-0"
TOTAL AREA: 15.0 Sq.Ft.

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" ALUMINUM
BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.75"
RADI: 3"
NO. Z BARS:
LENGTH: mm/"

USE NOTES: 1,4
1. Legend and border shall be direct applied Grade C reflective sheeting.
2. Legend and border shall be direct applied Type I reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" aluminum and demountable.
4. Background shall be Grade C reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.

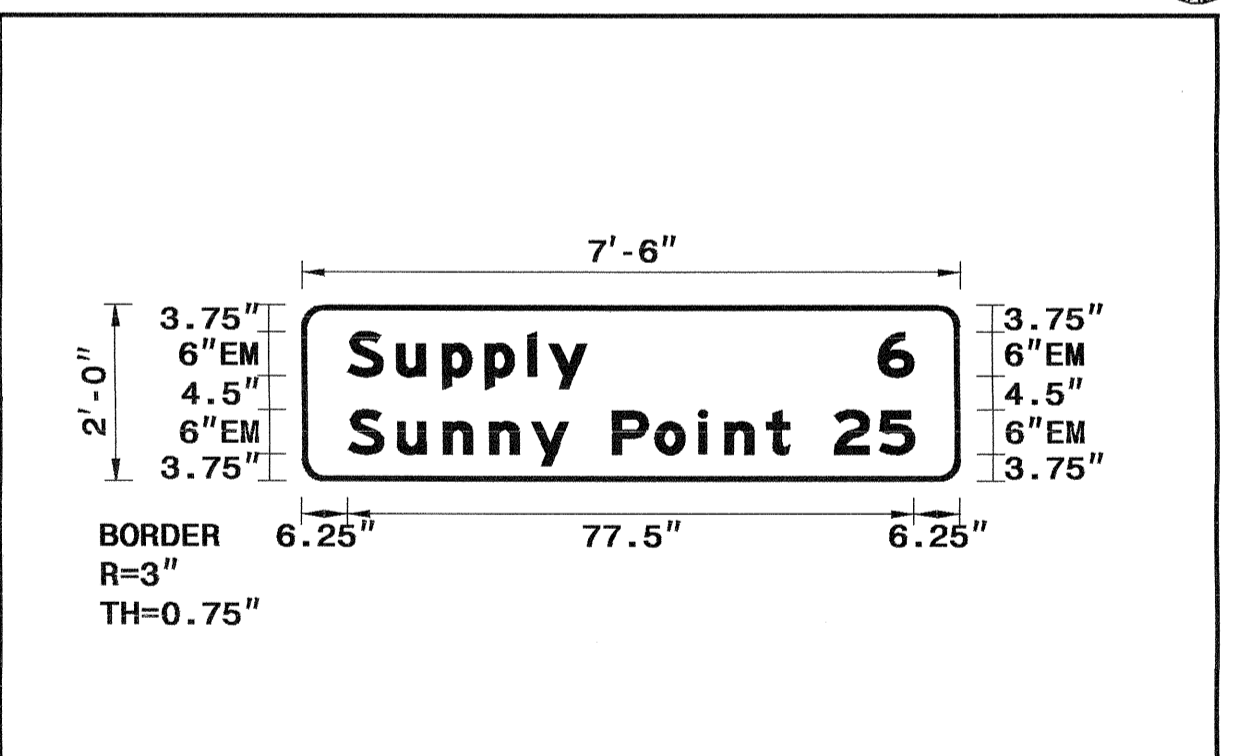

Letter spacings are to start of next letter

Series/Size	Text	Length
EM 2000	Supply Sunny Point 25	32.8
EM 2000	25	4.9
EM 2000	Sunny Point	60.4
EM 2000	25	11


Spacing Factor is 1 unless specified otherwise
FILENAME: GSENG

TYPE "D" SIGNS

IO-SEP-2008 12:15
P:\TIP-projects\U-3462\Traffic\Signing\CADD\Sign Designs\U-3462-Sign-Designs-01.dgn
meaton AT EC221856

TIP NO. U-3462	SHEET NO. SIGN-8
APPROVED: <i>Sydney Howard</i>	
DATE: 9/10/08	
SEAL	


401 QUANTITY REQ'D 3

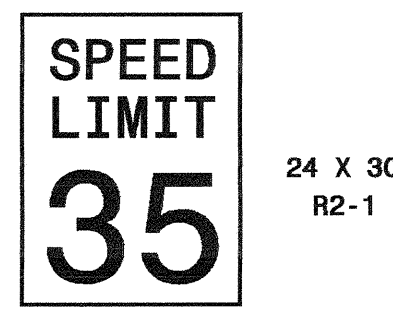

24 X 30
R2-1

ONE "U" POST PER SIGN


406 QUANTITY REQ'D 2



36 X 36
W3-3

ONE "U" POST PER SIGN

411 QUANTITY REQ'D 1



36 X 36
W3-5

ONE "U" POST PER SIGN


416 QUANTITY REQ'D 3



36 X 36
W9-2(R)

ONE "U" POST PER SIGN


402 QUANTITY REQ'D 1



36 X 36
R1-1

ONE "U" POST PER SIGN

407 QUANTITY REQ'D 9



24 X 30
R4-7

ONE "U" POST PER SIGN


412 QUANTITY REQ'D 1



24 X 24
EM-1

ONE "U" POST PER SIGN


417 QUANTITY REQ'D 1

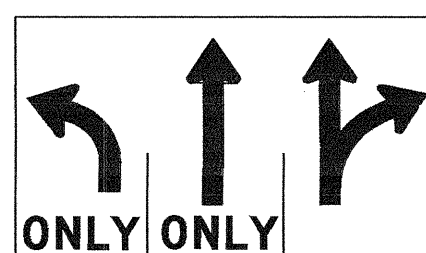

48 X 30
R3-8A

TWO "U" POSTS PER SIGN


403 QUANTITY REQ'D 7



30 X 30
R1-1

ONE "U" POST PER SIGN

408 QUANTITY REQ'D 3



30 X 30
R1-1

ONE "U" POST PER SIGN


413 QUANTITY REQ'D 1



24 X 24
EM-1

ONE "U" POST PER SIGN


418 QUANTITY REQ'D 1

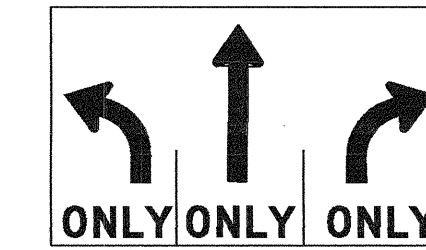

48 X 30
R3-8B

TWO "U" POSTS PER SIGN

404 QUANTITY REQ'D 1



36 X 36
W1-2R

ONE "U" POST PER SIGN


409 QUANTITY REQ'D 7



18 X 18
W23-15

MOUNT BELOW SIGN 403
IN 7 INSTALLATIONS


414 QUANTITY REQ'D 3

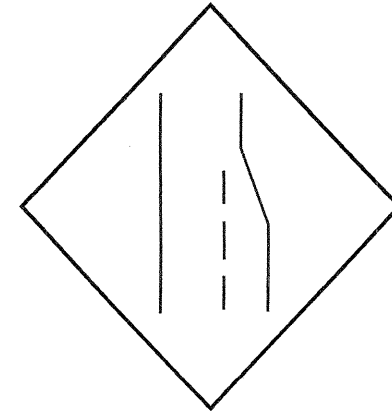

36 X 36
W4-2(R)

ONE "U" POST PER SIGN


405 QUANTITY REQ'D 1



36 X 36
W1-2L

ONE "U" POST PER SIGN


410 QUANTITY REQ'D 9



18 X 18
W23-15

MOUNT BELOW SIGN 407
IN 9 INSTALLATIONS

415 QUANTITY REQ'D 2




36 X 36
W6-3

ONE "U" POST PER SIGN

TYPE "E" SIGNS

I:\SFP\2008 12-02\U2462\Traffic\Signing\CADD\Quantities & GM Signs\U-3462seed.dgn
 meaton_01_120221556


501
509



1 - 21" X 15"
2 - 24" X 12"
1 - 24" X 24"

ONE "U" POST PER SIGN


506

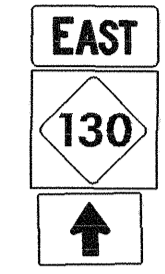

1 - 24" X 12"
1 - 24" X 24"
1 - 21" X 15"

ONE "U" POSTS PER SIGN


513

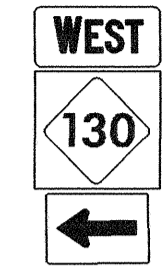

1 - 24" X 12"
1 - 24" X 24"
1 - 21" X 15"

ONE "U" POSTS PER SIGN


502

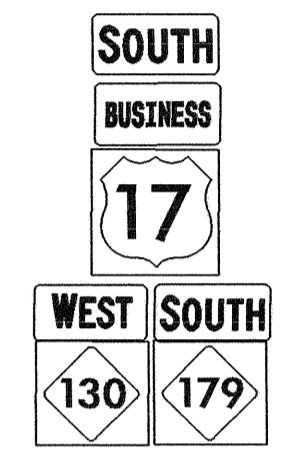

1 - 24" X 12"
1 - 24" X 12"
1 - 24" X 24"
2 - 24" X 12"
2 - 24" X 24"

TWO "U" POSTS PER SIGN


508

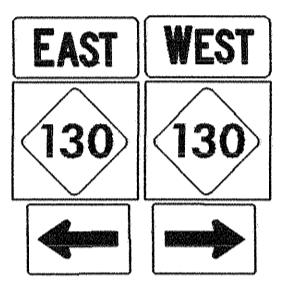

2 - 24" X 12"
2 - 24" X 24"
2 - 21" X 15"

TWO "U" POSTS PER SIGN


503

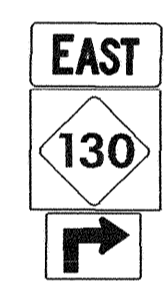

1 - 24" X 12"
1 - 24" X 24"
1 - 21" X 15"

ONE "U" POSTS PER SIGN


510



1 - 24" X 12"
1 - 24" X 12"
1 - 30" X 24"

ONE "U" POSTS PER SIGN


504

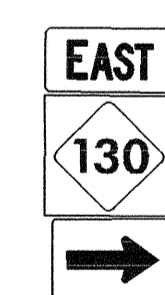

1 - 24" X 12"
1 - 24" X 24"
1 - 21" X 15"

ONE "U" POSTS PER SIGN


511

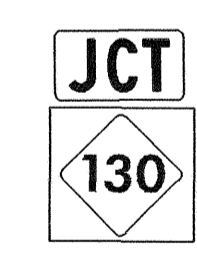

1 - 24" X 12"
1 - 24" X 24"

ONE "U" POST PER SIGN


505
507



2 - 24" X 12"
2 - 24" X 24"

ONE "U" POSTS PER SIGN

512

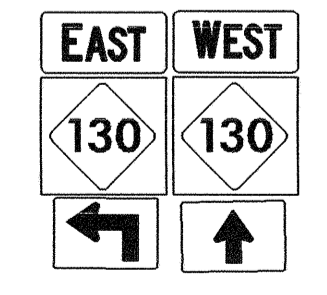

2 - 24" X 12"
2 - 24" X 24"
2 - 21" X 15"


TWO "U" POSTS PER SIGN

TYPE "F" SIGNS

TIP NO. U-3462	SHEET NO. SIGN-10
APPROVED: <i>[Signature]</i>	
DATE: 9/10/08	
SEAL	

-L- STA 16+00.00 BEGIN TIP PROJECT U-3462 SIGNING

-L- STA 80+00.00 END TIP PROJECT U-3462 SIGNING

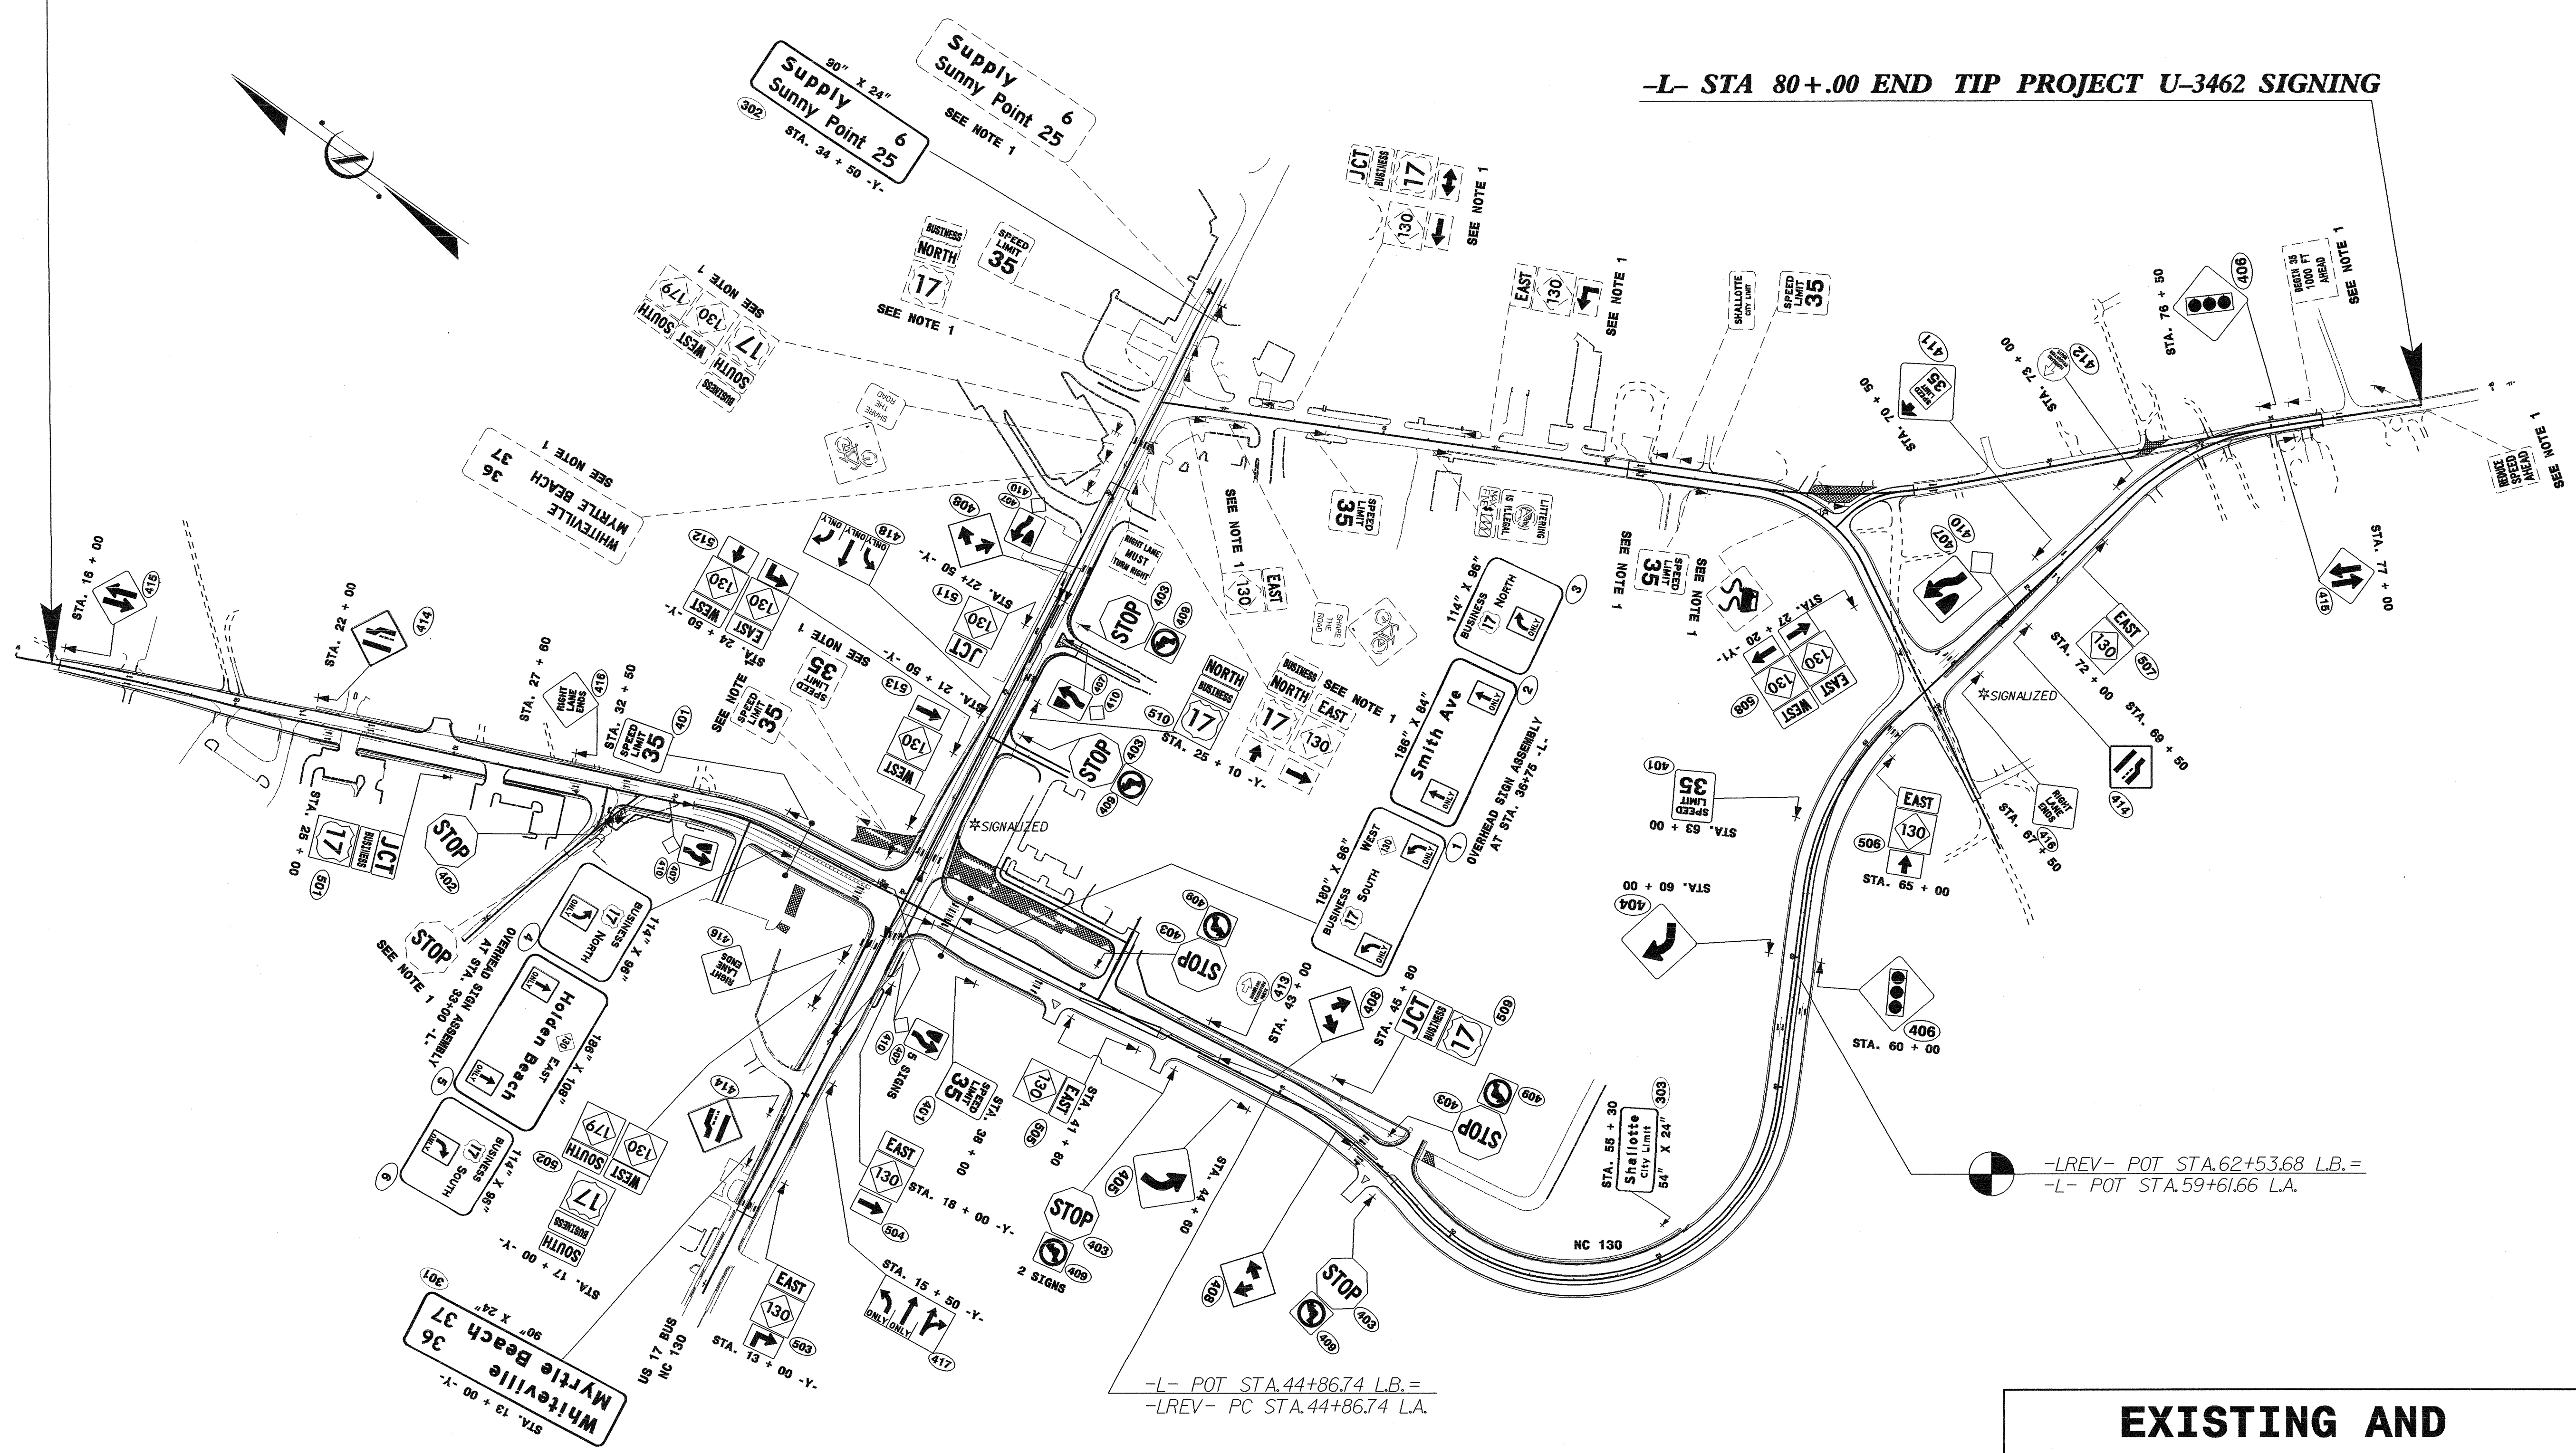

-LREV- POT STA.62+53.68 L.B.=
-L- POT STA.59+61.66 L.A.

-L- POT STA.44+86.74 L.B.=
-LREV- PC STA.44+86.74 L.A.

EXISTING AND PROPOSED SIGNS

10-SEP-2008 12:32
 P:\TIP\Projects\U-3462\Signing Layout Plans\U-3462_Sgn-STRIPIAP2.dgn
 meaton AT 10/22/08