

### INTERIM PAVEMENT MARKING SCHEDULE - PHASE 1

SYMBOL	DESCRIPTION	PAY ITEM/ QUANTITY BREAKDOWN	TOTAL QUANTITY
PAVEMENT MARKING LINES			
PAINT			
PA	4" WHITE EDGE LINE	2848 FT	
PC	4" WHITE SKIP LINES	FT	
PD	4" WHITE MINI SKIP LINES	FT	
PE	4" WHITE LANE LINE	FT	
PF	4" YELLOW 10' SKIP LINE	FT	
PH	4" YELLOW SINGLE CENTER LINE	FT	
PI	4" YELLOW DOUBLE CENTER LINES	4588 FT	
PV	8" YELLOW DIAGONAL LINES	134 FT	
P4	24" WHITE STOP BAR	38 FT	TOTAL 7924 FT
PAVEMENT MARKING SYMBOLS			
QC	WHITE STRAIGHT ARROW		TOTAL
TEMP RAISED PAVE MARKERS			
MA	YELLOW & YELLOW	33	TOTAL 33
MB	CRYSTAL & RED		

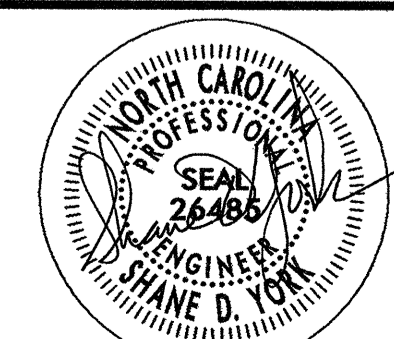
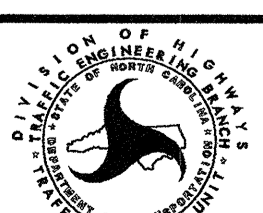
### INTERIM PAVEMENT MARKING SCHEDULE - PHASE 2

SYMBOL	DESCRIPTION	PAY ITEM/ QUANTITY BREAKDOWN	TOTAL QUANTITY
PAVEMENT MARKING LINES			
PAINT			
PA	4" WHITE EDGE LINE	34982 FT	
PC	4" WHITE SKIP LINES	460 FT	
PD	4" WHITE MINI SKIP LINES	182 FT	
PE	4" WHITE LANE LINE	2708 FT	
PF	4" YELLOW 10' SKIP LINE	FT	
PH	4" YELLOW SINGLE CENTER LINE	FT	
PI	4" YELLOW DOUBLE CENTER LINES	43264 FT	
PS	8" WHITE DIAGONAL LINES	476 FT	
PV	8" YELLOW DIAGONAL LINES	1074 FT	
P4	24" WHITE STOP BAR	602 FT	TOTAL 83748 FT
PAVEMENT MARKING SYMBOLS			
QA	WHITE LEFT TURN ARROW	10	
QB	WHITE RIGHT TURN ARROW	10	
QC	WHITE STRAIGHT ARROW	16	
QG	WHITE LT-STR-RT ARROW	10	TOTAL 46
TEMP RAISED PAVE MARKERS			
MA	YELLOW & YELLOW	270	
MB	CRYSTAL & RED	91	TOTAL 361

### INTERIM PAVEMENT MARKING SCHEDULE - PHASE 3

SYMBOL	DESCRIPTION	PAY ITEM/ QUANTITY BREAKDOWN	TOTAL QUANTITY
PAVEMENT MARKING LINES			
PAINT			
PA	4" WHITE EDGE LINE	50502 FT	
PC	4" WHITE SKIP LINES	2640 FT	
PD	4" WHITE MINI SKIP LINES	1648 FT	
PE	4" WHITE LANE LINE	12027 FT	
PF	4" YELLOW 10' SKIP LINE	34 FT	
PH	4" YELLOW SINGLE CENTER LINE	136 FT	
PI	4" YELLOW DOUBLE CENTER LINES	103576 FT	
PS	8" WHITE DIAGONAL LINES	589 FT	
PV	8" YELLOW DIAGONAL LINES	770 FT	
P4	24" STOPBAR	1868 FT	TOTAL 173790 FT
PAVEMENT MARKING SYMBOLS			
QA	WHITE LEFT TURN ARROW	38	
QB	WHITE RIGHT TURN ARROW	30	
QC	WHITE STRAIGHT ARROW	70	
QD	WHITE STRT AND LT TURN ARROW	4	
QE	WHITE STRT AND RT TURN ARROW	12	
QG	WHITE STRT, LT AND RT TURN ARROW	2	TOTAL 156
TEMP RAISED PAVE MARKERS			
MA	YELLOW & YELLOW	649	
MB	CRYSTAL & RED	433	TOTAL 1082

02:47:34 PM  
11/05/2003  
F:\TrafficControl\TCP\U0620-TCP-TCP28-PSH.DGN

APPROVED: SHANE D. YORK, PE DATE: 11/05/03		<b>INTERIM PAVEMENT MARKING SCHEDULE</b>	
	SCALE: N.A.		REVISIONS
	DATE: 11/05/03		
	DWG. BY: S. YORK		
	DESIGN BY: S. YORK		
REVIEWED BY: A.D. SARVIS			CADD FILE