


**Project Special Provisions
Structure**

Table of Contents

	Page #
Minimizing Railroad Flagging Service (10-12-01)	1
Adhesively Anchored Anchor Bolts or Dowels (10-12-01)	2
MSE Retaining Walls (10-03-02)	4
Falsework and Formwork (10-12-01)	12
Submittal of Working Drawings (2-14-04)	18
Metric Structural Steel (10-12-01)	24
Falsework and Forms Over or Adjacent to Traffic (10-12-01)	25
Railroad Provisions (SPECIAL)	

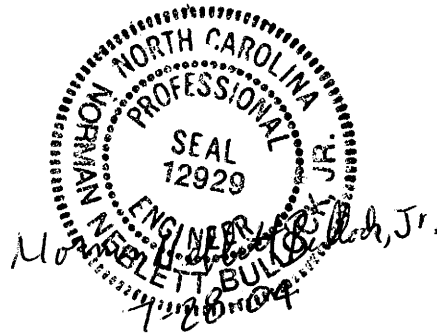

PROJECT SPECIAL PROVISIONS
STRUCTURE

PROJECT B-3256

WAKE COUNTY

MINIMIZING RAILROAD FLAGGING SERVICE

(10-12-01)

Notify the Engineer whenever construction activity on, or immediately adjacent to, the railroad right-of-way is expected to be delayed for more than 2 weeks due to:

- Construction activity being confined to an area where the activity, including the possible falling or overturning of proposed construction equipment and/or material, is not reasonably expected to interfere with Railroad operations or cause damage to facilities of the Railroad or its tenants, and where Railroad operations would not affect personnel and/or equipment.
- The Contractor removing his work force from the site to pursue his work at other locations.
- Scheduling of needed construction equipment and/or material
- Coordination with other required construction activity
- Seasonal considerations

In the notification, describe the reason for the delay and provide a schedule of when the delay in the area is expected to begin and when work in the area is expected to resume.

Contact the Railroad's authorized representative to determine if the flagman can be released and reassigned to accommodate the proposed work delay schedule. If the Railroad agrees, the Engineer follows the advance notification procedures for releasing and rescheduling a flagman as stated elsewhere in this Special Provision or as provided by the Railroad.

Prior to the release of the flagman, ensure that drainage facilities and erosion control measures adjacent to the tracks are properly maintained and that the site is left in a condition satisfactory to the Railroad. In addition, remove any material or equipment stored on the Railway right of way that is needed during the absence of the flagman.

If failing to notify the Engineer of a construction activity delay as stated above and a flagman remains assigned to the site for more than 2 weeks after the delay begins, the flagman time exceeding the 2 weeks, until work resumes on a routine schedule, is considered the Contractor's responsibility.

For that portion of the flagman time considered as the Contractor's responsibility, the Department will continue to pay the flagging charges but an amount of \$250 per day will be withheld from partial or final payment due the Contractor.

ADHESIVELY ANCHORED ANCHOR BOLTS OR DOWELS

(10-12-01)

1.0 DESCRIPTION

The work covered by this Special Provision consists of furnishing all necessary labor, equipment, and materials and performing all operations necessary for installing anchor bolts/dowels in concrete using an adhesive bonding system in accordance with the details shown on the plans and with the requirements of this specification unless otherwise directed.

Submit a description of the proposed adhesive bonding system to the Engineer for review, comments and acceptance. Include in the description the bolt type and its deformations, equipment, manufacturer's recommended hole diameter, embedment depth, material specifications, and any other material, equipment or procedure not covered by the plans or these specifications. List the properties of the adhesive, including density, minimum and maximum temperature application, setting time, shelf life, pot life, shear strength and compressive strength. If bars/dowels containing a corrosion protective coating are required, provide an adhesive that does not contain any chemical elements that are detrimental to the coating and include a statement to this effect in the submittal.

2.0 MATERIALS

Use an adhesive bonding system that has been tested for a tensile strength of 125% of the specified anchor bolt/dowel yield load. Provide certification that, for the particular bolt grade, diameter and embedment depth required, the anchor system will not fail by adhesive failure and that the anchor bolt/dowel will not move. The minimum concrete compressive strength is 3000 psi (20.7 MPa) for certification and anchorage selection.

Package components of the adhesive so that one whole container of each component mixes to form one batch of adhesive. Use containers designed so that all of the contents may be removed easily and sealed tightly to prevent leakage. Furnish adhesive material requiring hand mixing in two separate containers designated as Component A and Component B. Provide a self contained cartridge or capsule consisting of two components which are automatically mixed as they are dispensed, as in the case of a cartridge, or drilled into, as in the case of a capsule.

Clearly label each container with the manufacturer's name, date of manufacture, batch number, batch expiration date, direction for use, and warnings and precautions concerning the contents as required by State or Federal Laws and Regulations.

3.0 PROCEDURE**A. Drilling of Holes into Concrete**

When directed, use a jig or fixture to ensure the holes are positioned and aligned correctly during the drilling process. Upon approval, adjusting hole locations to avoid reinforcing steel is permitted.

Drill the holes with a pneumatic drill unless another drilling method is approved. Follow the manufacturer's recommendations regarding the diameter of the drilled hole.

Immediately after completion of drilling, blow all dust and debris out of the holes with oil-free compressed air using a wand extending to the bottom of the hole. Remove all dust from the sides of the holes by brushing the holes with a stiff-bristled brush of a sufficient size and then blow the hole free of dust. Repeat this procedure until the hole is completely clean. Check each hole with a depth gauge to ensure proper embedment depth.

Repair spalled or otherwise damaged concrete using approved methods.

B. Inspection of Holes

Inspect each hole immediately prior to placing the adhesive and the anchor bolts/dowels. Ensure all holes are dry and free of dust, dirt, oil, and grease. Rework any hole that does not meet the requirements of this Special Provision.

C. Mixing of Adhesive

Mix the adhesive in strict conformance with the manufacturer's instructions.

D. Embedment of Anchor Bolt/Dowel

Clean each anchor bolt/dowel so that it is free of all rust, grease, oil, and other contaminants.

Unless otherwise shown on the plans, the minimum anchor bolt/dowel embedment depth is such that the adhesive develops at least 125% of the anchor bolt/dowel yield load as determined by the manufacturer.

Insert the anchor bolt/dowel the specified depth into the hole and slightly agitate it to ensure wetting and complete encapsulation. After insertion of the anchor bolt/dowel, strike off any excessive adhesive flush with the concrete face. Should the adhesive fail to fill the hole, add additional adhesive to the hole to allow a flush strike-off.

Do not disturb the anchor bolts/dowels while adhesive is hardening.

4.0 FIELD TESTING

When specified on the plans, test the installed anchor bolts/dowels for adequate adhesive as specified below. Inform the Engineer when the tests will be performed at least 2 days prior to testing. Conduct the tests in the presence of the Engineer.

Use a calibrated hydraulic centerhole jack system for testing. Place the jack on a plate washer that has a hole at least 1/8 inch (3 mm) larger than the hole drilled into the concrete. Position the plate washer on center to allow an unobstructed pull. Position the anchor

bolts/dowels and the jack on the same axis. Have an approved testing agency calibrate the jack within 6 months prior to testing. Supply the Engineer with a certificate of calibration.

In the presence of the Engineer, field test 10% of the first 50 anchor bolts/dowels prior to installing any additional anchors. For testing, apply and hold briefly 90% of the anchor bolt/dowel yield load shown on the plans. No visible signs of movement of the anchor bolts/dowels is permitted under this load. Upon receiving satisfactory results from these tests, install the remaining anchors. Test a minimum of 2% of the remaining anchors as previously described.

Record data for each anchor bolt/dowel tested on the report form entitled "Installation Test Report of Adhesively Anchored Anchor Bolts or Dowels". Obtain this form from the North Carolina Department of Transportation Materials and Tests Engineer. Submit a copy of the completed report forms to the Engineer.

Final acceptance of the adhesively anchored system is based on the conformance of the pull test to the requirements of this specification. Failure to meet the criteria of this specification is grounds for rejection.

5.0 BASIS OF PAYMENT

No separate measurement or payment will be made for furnishing, installing, and testing anchor bolts/dowels.

Payment at the contract unit prices for the various pay items will be full compensation for all materials, equipment, tools, labor, and incidentals necessary to complete the above work.

MSE RETAINING WALLS

(10-03-02)

1.0 DESCRIPTION

Design, prepare plans, and construct MSE retaining walls to the lines, grades and locations shown in the plans and in accordance with this specification and the details shown in the plans. Work includes all excavation, leveling pad, concrete face panel, concrete coping, retaining wall backfill, the fabric above the #57 stone, and all other materials, labor, tools, equipment and incidentals necessary to complete the work.

Furnish any one of following retaining wall systems in accordance with this Special Provision. Declare the choice of retaining wall system at the Preconstruction Conference for the project. The wall system chosen at the Preconstruction Conference becomes the required wall system for the contract.

The Reinforced Earth Wall as manufactured by:

The Reinforced Earth Company
8614 Westwood Center Drive, Suite 1100

Vienna, VA 22182
Telephone (703) 821-1175

The Retained Earth Wall as manufactured by:

Foster Geotechnical
1372 Old Bridge Road, Suite 101
Woodbridge, VA 22192
Telephone (703) 499-9818

The Hilfiker RSE Wall as manufactured by:

T and B Structural Systems
637 W. Hurst Boulevard, Suite 2A
Hurst, TX 76053
Telephone (817) 280-9858

Value engineering proposals for other wall systems are not considered.

Design the retaining walls to meet the criteria of the current AASHTO Standard Specifications for Highway Bridges and the requirements specified in the plans.

Submit eight sets of complete working drawings/shop plans, erection plans and design calculations, sealed by a North Carolina Registered Professional Engineer, for review and approval prior to beginning wall work. Allow 40 days for review and approval from the date they are received by the Engineer until they are returned to the Contractor.

Provide the option chosen to meet the requirements of the plans, this Special Provision and the Standard Specifications.

2.0 GENERAL

The Resident Engineer schedules a Preconstruction Conference with representatives from the Contractor, the retaining wall system Supplier, and the Soils and Foundation Section to discuss construction details and inspection of the retaining wall.

Provide all necessary material from the Supplier chosen.

Obtain from the Supplier technical instruction and guidance in preconstruction activities, including the Preconstruction Conference, and on-site technical assistance during construction. Follow any instructions from the Supplier closely unless otherwise directed.

3.0 MATERIALS

A. Concrete Panels

Provide the concrete mix designed by the Supplier and approved by the State Materials Engineer prior to use. Furnish a copy of the Supplier's approval to the Engineer and to

the Materials and Tests Unit in Raleigh. Design the mix to meet the strength requirements included in this Special Provision under the heading "Casting of Precast Concrete Face Panels".

B. Concrete Leveling Pad

Provide Class A concrete conforming to the applicable requirements in Sections 420 and 1000 of the Standard Specifications for the leveling pad.

C. Concrete Coping

Use Class A Concrete for coping and apply the requirements in Sections 420, 1000, and 1077 of the Standard Specifications. The requirements in Sections 425 and 1070 of the Standard Specifications apply to the reinforcing steel in coping. If preferred, precast coping is permitted unless otherwise stated in the plans.

D. Reinforcing Steel, Reinforcing Mesh, Mats, or Strips, Tie Strips and Fasteners

Use reinforcing Steel conforming to the applicable requirements in Sections 425 and 1070 of the Standard Specifications.

Shop-fabricate tie strips of hot rolled steel conforming to the minimum requirements of ASTM A570-85, Grade 50 (Grade 345) or equivalent. Shop fabricate the reinforcing mesh or mats of cold drawn steel wire conforming to the minimum requirements of AASHTO M32 (M32M) and weld into the finished mesh fabric in accordance with AASHTO M55 (M55M). Hot roll reinforcing strips from bars to the required shape and dimensions with their physical and mechanical properties conforming to AASHTO M223 (M223M), Grade 65 (Grade 450). Cut to lengths and tolerances shown on the plans and punch holes for bolts in the locations shown on plan details. The minimum bending radius of tie strips is 1 inch (25 mm). Inspect all reinforcing and tie strips carefully to ensure they are true to size and free from defects that may impair their strength or durability. Galvanize in accordance with the minimum requirements of AASHTO M111.

Use 1/2" (12.70 mm) diameter bolts, nuts and washers conforming to AASHTO M164 (M164M). Provide Bolt and thread lengths in accordance with Supplier's recommendations. Hot-dip galvanize bolts and nuts in accordance with the requirements of AASHTO M232 (M232M).

E. Miscellaneous Panel Components and Attachment Devices

Provide miscellaneous concrete face panel components, including dowels, polyvinylchloride pipe, stirrups, etc., in accordance with the Supplier's recommendations.

Fabricate clevis connector and connector bar from cold drawn steel wire conforming to the requirements of AASHTO M32 (M32M) and welded in accordance with AASHTO M55 (M55M). Galvanize loops in accordance with AASHTO M111.

Cold form mat anchors or buttonheads, where applicable, symmetrically about the axis of the wire to develop the minimum guaranteed ultimate tensile strength of the wire. Do not use a cold forming process that causes indentations in the wire. Provide mat anchors and buttonheads that do not contain wide open splits or splits not parallel with the axis of the wire.

Galvanize mat anchors and buttonheads after fabrication in accordance with the requirements of AASHTO M111. Repair damage to the galvanized coating prior to or during installation in the acceptable manner providing a coating comparable to that provided by AASHTO M111.

F. Joints and Joint Materials

Provide the type and grade bearing pads approved by the chosen Supplier.

Where shown on the plans, provide a polyester filter fabric cover, approved by the Supplier, for horizontal and vertical joints between panels. Use adhesive approved by the manufacturer to attach the fabric material to the rear of the facing panels.

G. Alignment Pins

Use 5/8" (16 mm) diameter, mild steel and smooth bars galvanized in accordance with AASHTO M111 for pins to align the face panels during construction.

H. #57 Washed Crushed Stone Backfill (Retaining Wall)

Use backfill material conforming to the applicable requirements of Section 1005 of the Standard Specifications and meeting the following criteria:

- Free of organic or otherwise deleterious substances.
- Contains a maximum organic content of 0.1%.
- Soundness (AASHTO T104): Have a maximum weighted average loss of 15% when subjected to five cycles of the soundness test.
- Resistance to Abrasion (AASHTO T96): Have a maximum percentage of wear of 55%.
- Electrochemical:

Resistivity > 5000 ohm-cm	ASTM D1125
4.5 < pH < 9.5	ASTM D1293

Before placing any backfill, furnish a Type IV certification in accordance with Article 106-3 of the Standard Specifications. Include a copy of all test results conducted in accordance with the above requirements in the certification. The Engineer determines how often NCDOT samples backfill material to assure compliance with gradation and electrochemical requirements.

1. Sample Preparation

Obtain approximately 2,000 grams of representative material and transfer it into a 1 gallon (3.8 liters) wide mouth plastic jug. Then add an equal weight of deionized or distilled water to the sample, and let this mixture set for approximately 30 minutes. At the end of this period, place a lid on the container and vigorously agitate the mixture for 3 minutes. Repeat this agitation at the 2 hour and 4 hour intervals. Allow the sample to set for approximately 20 hours after the 4 hour agitation so the solids will settle out. At this time remove a sufficient amount of the solution and filter through a coarse paper (Fisher Q8) to obtain the supernate to be analyzed in accordance with the above procedures.

2. Backfill Separation Fabric

Place a layer of fabric on top of the completed wall backfill to prevent migration of fines from common backfill placed above from contaminating the wall backfill.

Use fabric meeting the applicable requirements for Type 2 fabric as described in Section 1056 of the Standard Specifications.

Overlap the fabric a minimum of 18 inches (460 mm).

4.0 CASTING OF PRECAST CONCRETE FACE PANELS

A. General

Cast concrete face panels and apply the requirements of Sections 1000 and 1077 of the Standard Specifications.

B. Acceptance

Supply concrete for precast panels that attains a 28 day compressive strength of 4000 psi (27.6 MPa) unless otherwise shown on plans.

Acceptance of the concrete face panels with respect to compressive strength is determined on the basis of production lots. A production lot is a group of panels that is represented by a single compressive strength sample and consists of either 40 panels or a single day's production, whichever is less. Make compression tests on standard 6" x 12" (152 mm by 305 mm) or 4" x 8" (102 mm by 203 mm) test specimens prepared in accordance with AASHTO T23. Conduct compressive strength testing in accordance with AASHTO T22.

Cast a minimum of four cylinders for each production lot sampled. Cure all specimens in the same manner as the panels. An acceptance test result is the average compressive strength of two cylinders.

The lot is acceptable if the test results are equal to or greater than 4000 psi (27.6 MPa).

If a production lot fails to meet the specified compressive strength requirements, the production lot is rejected unless the Supplier, at his own expense, obtains and submits evidence of a type acceptable to the Engineer that the strength and quality of the concrete placed within the panels of the production lot is acceptable. If such evidence consists of tests made on cores taken from the panels within the production lot, obtain and test the cores in accordance with the requirements of AASHTO T24.

C. Miscellaneous

1. Casting

Set all panel components in place in the forms to conform to the details on the plans and accepted shop plans prior to casting. Cast the panels on a flat area with the front face of the form at the bottom and the rear face at the top. Set tie strip guides or clevis connectors on the rear face.

Give special care to the clevis connectors: Place all clevis connectors normal to the panel and attach them to the alignment templates using the bars provided with the forms. Tolerance for the vertical and horizontal alignment of the clevis connectors is $\pm 1/8$ " (3 mm). Clean the holes inside the loops so that they are free of all concrete and debris.

Place the concrete in each unit without interruption and consolidate using an approved vibrator, supplemented by hand tamping to force the concrete into corners of the forms and prevent the formation of stone pockets or cleavage planes. Use clear form oil of the same manufacture throughout the casting operation.

2. Concrete Finish

Provide an ordinary surface finish as defined by Subarticle 420-18(B) of the Standard Specifications for the front face (exposed face of wall) unless otherwise shown on the plans. Screed the rear face of the panel to a uniform surface finish to eliminate open pockets of aggregate and surface distortions in excess of 1/4 inch (6 mm).

3. Tolerances

Manufacture all units within the following tolerances:

- All dimensions within 3/16 inch (5 mm), except the lateral position of the tie strips to within 1 inch (25 mm).

- Surface defects on formed surfaces are not to exceed 1/8 inch in 5 feet (3mm in 1.5 m).

4. Marking

Clearly scribe the date of manufacture, the production lot number, and the piece-mark on the rear face of each panel.

5. Handling, Storage and Shipping

Handle, store and ship all units in such manner as to eliminate the danger of discoloration, chipping, cracks, fractures and excessive bending stresses. Support panels in storage on firm blocking located immediately adjacent to tie strips to avoid bending the tie strips. Store panels in a horizontal position and stack no more than six high. Do not ship panels prior to 5 days after production.

5.0 CONSTRUCTION METHODS

A. Site Preparation

Perform surface excavation operations and random fill construction in the vicinity of the structure in accordance with the applicable portions of this Special Provision, and in reasonably close conformity to the lines, grades, dimensions, and cross-sections shown on the plans.

B. Retaining Wall Excavation

Excavate all material necessary for the construction of the retaining walls in accordance with the plans and this provision. Excavation includes the construction and subsequent removal of all necessary bracing, shoring, sheeting and cribbing and all pumping, bailing, and draining. Perform random backfilling in accordance with the details in the plans and dispose of or stockpile surplus or unsuitable excavated material as directed by the Engineer.

Perform all necessary clearing and grubbing at the site in accordance with Section 200 of the Standard Specifications.

Notify the Engineer a sufficient time before beginning the excavation so that measurements may be taken of the undisturbed ground.

Shore or brace the excavation in accordance with local and state safety standards. Perform excavation and related work in such sequence that no portion of the retaining wall will be endangered by subsequent operations.

When the retaining wall is adjacent to a traveled way, obtain approval before beginning the excavation. Submit drawings and design calculations in accordance with the provisions of Subarticle 410-5(D) of the Standard Specifications.

Notify the Engineer after excavating each location of the wall. Do not place the concrete leveling pad until the depth of the excavation and the character of the foundation material have been approved.

Remove all sheeting and bracing as the random backfilling progresses.

Obtain approval for all random backfill material. Large or frozen lumps, wood or other undesirable material is not allowed in the backfill. Compact all backfill in accordance with Subarticle 235-4(C) of the Standard Specifications.

C. Wall Erection

1. Foundation Preparation

Prior to wall construction, grade the foundation for the structure level for a width equal to or exceeding the length of soil reinforcing or as shown on the plans. Compact the foundation to a minimum of 95% of the maximum dry density as determined by AASHTO T99.

2. Leveling Pad Construction

Construct an unreinforced concrete leveling pad of Class A concrete having the dimensions and at the locations and elevations shown on the plans. Cure the leveling pad a minimum of 24 hours before placement of wall panels.

3. Placing Concrete Face Panels

Place precast concrete panels vertically with equipment that does not damage the panels. For erection, handle panels by means of eyes set into the upper edge of the panels. Use other placement methods when approved by the Supplier and Engineer. Place panels in successive horizontal lifts in accordance with the details and at the locations shown on the plans. Externally brace the first lift of panels. Proceed with backfill placement as hereinafter specified. As panel and backfill lifts progress, maintain the panels in vertical position by means of temporary wooden wedges placed in the joint at the junction of the two adjacent panels on the external side of the wall. The maximum tolerance for vertical (plumbness) and horizontal alignment is 3/4 inch (19 mm) when measured along a 10 foot (3 m) straightedge. The maximum allowable offset in any panel joint is 3/4 inch (19 mm). The overall vertical tolerance of the wall (plumbness from top to bottom) is 1/2 inch (13 mm) per 10 feet (3 m) of wall height. As wall erection progresses, install horizontal and vertical joint filler in accordance with the Supplier's instructions.

4. Placing Retaining Wall Backfill and Soil Reinforcing

Place backfill within the structure closely following the erection of each lift of panels. Place the backfill material in layers for the full width shown on the plans. Place layers not more than 7½ inches (190 mm) in depth loose thickness and compact. Compact #57 stone backfill with at least four passes of an 8 – 10 ton

(7.3 - 9.1 metric ton) vibratory roller in the vibratory mode, or as directed by the Engineer. At each tie strip level, reinforcing mesh level, or reinforcing mat level of the wall, level and compact the backfill material before placing and attaching tie strip, mat or mesh. Place the reinforcing strips, mat or mesh normal to the face of the wall or as shown on the plans. Compact backfill layers in a direction parallel to the wall and without disturbance or distortion of reinforcing strips, mats, mesh, or wall panels. Use only a hand-operated mechanical compactor within 3 feet (1 m) of the face of the wall as a precaution against pushing panels outward and distorting the vertical face of the wall. Exercise extreme care to prevent bending panel tie strips, mats, or mesh during compaction. Compact as required with a minimum of three passes of the compactor.

At the end of each day's operation, slope the areas adjacent to the stone backfill such that in the event of rain, surface runoff will be diverted away from the backfill area. Contamination of the stone backfill by soil fines from runoff is grounds for rejection of the backfill.

5. Placing Concrete Coping

When cast-in-place coping is used, place a 1/2 inch deep vertical contraction joint in all exposed faces at a spacing equal to two panel widths and in accordance with Article 825-10(B) of the Standard Specifications. Place the contraction joints in the coping so that it aligns with the vertical joints between the panels.

6.0 BASIS OF PAYMENT

Payment will be made under:

MSE Retaining Walls, Sta. _____Lump Sum

FALSEWORK AND FORMWORK

(10-12-01)

1.0 DESCRIPTION

Use this Special Provision as a guide to develop temporary works submittals required by the Standard Specifications or other provisions; no additional submittals are required herein. Such temporary works include, but are not limited to, falsework and formwork.

Falsework is any temporary construction used to support the permanent structure until it becomes self-supporting. Formwork is the temporary structure or mold used to retain plastic or fluid concrete in its designated shape until it hardens. Access scaffolding is a temporary structure that functions as a work platform that supports construction personnel, materials, and tools, but is not intended to support the structure. Scaffolding systems that are used to temporarily support permanent structures (as opposed to functioning as work platforms) are considered to be falsework under the definitions given. Shoring is a component of falsework such as horizontal, vertical, or inclined support members. Where

the term “temporary works” is used, it includes all of the temporary facilities used in bridge construction that do not become part of the permanent structure.

Design and construct safe and adequate temporary works that will support all loads imposed and provide the necessary rigidity to achieve the lines and grades shown on the plans in the final structure.

2.0 MATERIALS

Select materials suitable for temporary works; however, select materials that also ensure the safety and quality required by the design assumptions. The Engineer has authority to reject material on the basis of its condition, inappropriate use, safety, or nonconformance with the plans. Clearly identify allowable loads or stresses for all materials or manufactured devices on the plans. Revise the plan and notify the Engineer if any change to materials or material strengths is required.

3.0 DESIGN REQUIREMENTS

A. Working Drawings

Provide working drawings for items as specified in the contract, or as required by the Engineer, with design calculations and supporting data in sufficient detail to permit a structural and safety review of the proposed design of the temporary work.

When concrete placement is involved, include data such as the drawings of proposed sequence, rate of placement, direction of placement, and location of all construction joints. Submit the number of copies as called for by the contract.

When required, have the drawings and calculations prepared under the guidance of, and sealed by, a North Carolina Registered Professional Engineer who is knowledgeable in temporary works design.

Design falsework and formwork requiring submittals in accordance with the 1995 AASHTO *Guide Design Specifications for Bridge Temporary Works* except as noted herein.

1. Wind Loads

Table 2.2 of Article 2.2.5.1 is modified to include wind velocities up to 110 mph (177 km/hr). In addition, Table 2.2A is included to provide the maximum wind speeds by county in North Carolina.

Table 2.2 - Wind Pressure Values

Height Zone feet (m) above ground	Pressure, lb/ft ² (kPa) for Indicated Wind Velocity, mph (km/hr)				
	70 (112.7)	80 (128.7)	90 (144.8)	100 (160.9)	110 (177.0)
0 to 30 (0 to 9.1)	15 (0.72)	20 (0.96)	25 (1.20)	30 (1.44)	35 (1.68)
30 to 50 (9.1 to 15.2)	20 (0.96)	25 (1.20)	30 (1.44)	35 (1.68)	40 (1.92)
50 to 100 (15.2 to 30.5)	25 (1.20)	30 (1.44)	35 (1.68)	40 (1.92)	45 (2.15)
over 100 (30.5)	30 (1.44)	35 (1.68)	40 (1.92)	45 (2.15)	50 (2.39)

2. Time of Removal

The following requirements replace those of Article 3.4.8.2.

Do not remove forms until the concrete has attained strengths required in Article 420-17 of the Standard Specifications and these Special Provisions.

Do not remove forms until the concrete has sufficient strength to prevent damage to the surface.

Table 2.2A - Steady State Maximum Wind Speeds by Counties in North Carolina

COUNTY	25 YR (mph) (km/hr)	COUNTY	25 YR (mph) (km/hr)	COUNTY	25 YR (mph) (km/hr)
Alamance	70 (112.7)	Franklin	70 (112.7)	Pamlico	100 (160.9)
Alexander	70 (112.7)	Gaston	70 (112.7)	Pasquotank	100 (160.9)
Alleghany	70 (112.7)	Gates	90 (144.8)	Pender	100 (160.9)
Anson	70 (112.7)	Graham	80 (128.7)	Perquimans	100 (160.9)
Ashe	70 (112.7)	Granville	70 (112.7)	Person	70 (112.7)
Avery	70 (112.7)	Greene	80 (128.7)	Pitt	90 (144.8)
Beaufort	100 (160.9)	Guilford	70 (112.7)	Polk	80 (128.7)
Bertie	90 (144.8)	Halifax	80 (128.7)	Randolph	70 (112.7)
Bladen	90 (144.8)	Harnett	70 (112.7)	Richmond	70 (112.7)
Brunswick	100 (160.9)	Haywood	80 (128.7)	Robeson	80 (128.7)
Buncombe	80 (128.7)	Henderson	80 (128.7)	Rockingham	70 (112.7)
Burke	70 (112.7)	Hertford	90 (144.8)	Rowan	70 (112.7)
Cabarrus	70 (112.7)	Hoke	70 (112.7)	Rutherford	70 (112.7)
Caldwell	70 (112.7)	Hyde	110 (177.0)	Sampson	90 (144.8)
Camden	100 (160.9)	Iredell	70 (112.7)	Scotland	70 (112.7)
Carteret	110 (177.0)	Jackson	80 (128.7)	Stanley	70 (112.7)
Caswell	70 (112.7)	Johnston	80 (128.7)	Stokes	70 (112.7)
Catawba	70 (112.7)	Jones	100 (160.9)	Surry	70 (112.7)
Cherokee	80 (128.7)	Lee	70 (112.7)	Swain	80 (128.7)
Chatham	70 (112.7)	Lenoir	90 (144.8)	Transylvania	80 (128.7)
Chowan	90 (144.8)	Lincoln	70 (112.7)	Tyrell	100 (160.9)
Clay	80 (128.7)	Macon	80 (128.7)	Union	70 (112.7)
Cleveland	70 (112.7)	Madison	80 (128.7)	Vance	70 (112.7)
Columbus	90 (144.8)	Martin	90 (144.8)	Wake	70 (112.7)
Craven	100 (160.9)	McDowell	70 (112.7)	Warren	70 (112.7)
Cumberland	80 (128.7)	Mecklenburg	70 (112.7)	Washington	100 (160.9)
Currituck	100 (160.9)	Mitchell	70 (112.7)	Watauga	70 (112.7)
Dare	110 (177.0)	Montgomery	70(112.7)	Wayne	80 (128.7)
Davidson	70 (112.7)	Moore	70 (112.7)	Wilkes	70 (112.7)
Davie	70 (112.7)	Nash	80 (128.7)	Wilson	80 (128.7)
Duplin	90 (144.8)	New Hanover	100 (160.9)	Yadkin	70 (112.7)
Durham	70 (112.7)	Northampton	80 (128.7)	Yancey	70 (112.7)
Edgecombe	80 (128.7)	Onslow	100 (160.9)		
Forsyth	70 (112.7)	Orange	70 (112.7)		

Note on the working drawings any anchorages, connectors, inserts, steel sleeves or other such devices used as part of the falsework or formwork that remains in the permanent structure. If the plan notes indicate that the structure contains the necessary corrosion protection required for a Corrosive Site, epoxy coat, galvanize, metallize or otherwise protect these devices as directed by the Engineer. Any coating required by the Engineer will be considered incidental to the various pay items requiring temporary works.

B. Review and Approval

The Engineer is responsible for the review and approval of temporary works' drawings.

Submit the working drawings sufficiently in advance of proposed use to allow for their review, revision (if needed), and approval without delay to the work.

Do not start construction of any temporary work for which working drawings are required until the drawings have been approved. Such approval does not relieve the Contractor of the responsibility for the accuracy and adequacy of the working drawings.

The time period for review of the working drawings does not begin until complete drawings and design calculations, when required, are received by the Engineer.

On the drawings, show all information necessary to allow the design of any component to be checked independently as determined by the Engineer.

If requested by the Engineer, submit with the working drawings manufacturer's catalog data listing the weight of all construction equipment that will be supported on the temporary work. Show anticipated total settlements and/or deflections of falsework and forms on the working drawings. Include falsework footing settlements, joint take-up, and deflection of beams or girders. Design the falsework and forms supporting deck slabs and overhangs on girder bridges so that there will be no differential settlement between the girders and the deck forms during placement of deck concrete.

4.0 CONSTRUCTION REQUIREMENTS

All requirements of Section 420 of the Standard Specifications apply.

Construct temporary works in conformance with the approved working drawings. Ensure that the quality of materials and workmanship employed is consistent with that assumed in the design of the temporary works. Do not weld falsework members to any portion of the permanent structure unless approved. Show any welding to the permanent structure on the approved construction drawings.

Provide tell-tales attached to the forms and extending to the ground, or other means, for accurate measurement of falsework settlement. Make sure that the anticipated compressive settlement and/or deflection of falsework does not exceed 1 inch (25 mm). For cast-in-place concrete structures, make sure that the calculated deflection of falsework

flexural members does not exceed $1/240$ of their span regardless of whether or not the deflection is compensated by camber strips.

A. Maintenance and Inspection

Inspect and maintain the temporary work in an acceptable condition throughout the period of its use. Certify that the manufactured devices have been maintained in a condition to allow them to safely carry their rated loads. Clearly mark each piece so that its capacity can be readily determined at the job site.

Perform an in-depth inspection of an applicable portion(s) of the temporary works, in the presence of the Engineer, not more than 24 hours prior to the beginning of each concrete placement. Inspect other temporary works at least once a month to ensure that they are functioning properly. Have a North Carolina Registered Professional Engineer inspect the cofferdams, shoring, sheathing, support of excavation structures, and support systems for load tests prior to loading.

B. Foundations

Determine the safe bearing capacity of the foundation material on which the supports for temporary works rest. If required by the Engineer, conduct load tests to verify proposed bearing capacity values that are marginal or in other high-risk situations.

The use of the foundation support values shown on the contract plans of the permanent structure is permitted if the foundations are on the same level and on the same soil as those of the permanent structure.

Allow for adequate site drainage or soil protection to prevent soil saturation and washout of the soil supporting the temporary works supports.

If piles are used, the estimation of capacities and later confirmation during construction using standard procedures based on the driving characteristics of the pile is permitted. If preferred, use load tests to confirm the estimated capacities; or, if required by the Engineer conduct load tests to verify bearing capacity values that are marginal or in other high risk situations.

The Engineer reviews and approves the proposed pile and soil bearing capacities.

5.0 REMOVAL

Unless otherwise permitted, remove and keep all temporary works upon completion of the work. Do not disturb or otherwise damage the finished work.

Remove temporary works in conformance with the contract documents. Remove them in such a manner as to permit the structure to uniformly and gradually take the stresses due to its own weight.

6.0 METHOD OF MEASUREMENT

Unless otherwise specified, temporary works will not be directly measured.

7.0 BASIS OF PAYMENT

Payment at the contract unit prices for the various pay items requiring temporary works will be full compensation for the above falsework and formwork.

SUBMITTAL OF WORKING DRAWINGS**(2-14-04)****1.0 GENERAL**

Submit working drawings in accordance with Article 105-2 of the Standard Specifications and the requirements of this Special Provision. The list of submittals contained herein does not represent a list of required submittals for this project. Submittals are only necessary for those items as required by the Standard Specifications, other Special Provisions, or contract plans. Make submittals that are not specifically noted in this Special Provision directly to the Resident Engineer.

If submittals contain variations from plan details or specifications, significantly affect project cost, or significantly affect field construction or operations, discuss them with, and submit them through, the Resident Engineer. State the reason for the proposed variation in the submittals. To minimize overall review time, make sure all working drawing submittals are complete when first submitted. Provide a contact name and phone number with each submittal. Direct any questions regarding working drawing submittal requirements to the Resident Engineer, Structure Design Unit contacts or the Geotechnical Engineering Unit contacts noted below.

2.0 WORKING DRAWINGS SUBMITTAL CONTACTS

All submittals noted herein are reviewed by the Structure Design Unit and/or the Geotechnical Engineering Unit.

For submittals to the Structure Design Unit, use the following addresses:

Via US mail:

Mr. G. R. Perfetti, P. E.
 State Bridge Design Engineer
 North Carolina Department
 of Transportation
 Structure Design Unit
 1581 Mail Service Center
 Raleigh, NC 27699-1581
 Attention: Mr. P. D. Lambert, P. E.

Via other delivery service:

Mr. G. R. Perfetti, P. E.
 State Bridge Design Engineer
 North Carolina Department
 of Transportation
 Structure Design Unit
 1000 Birch Ridge Drive
 Raleigh, NC 27610
 Attention: Mr. P. D. Lambert, P. E.

For submittals to the Geotechnical Engineering Unit, use the following addresses:

For projects in Divisions 1-7, use the following Eastern Regional Office address:

Via US mail:

Mr. K. J. Kim, Ph. D., P. E.
Eastern Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Eastern Regional Office
1570 Mail Service Center
Raleigh, NC 27699-1570

Via other delivery service:

Mr. K. J. Kim, Ph. D., P. E.
Eastern Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Eastern Regional Office
3301 Jones Sausage Road, Suite 100
Garner, NC 27529

For projects in Divisions 8-14, use the following Western Regional Office address:

Via US mail:

Western Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Western Regional Office
1589 Mail Service Center
Raleigh, NC 27699-1589

Via other delivery service:

Western Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Western Regional Office
1020 Birch Ridge Drive
Raleigh, NC 27610

Attention: Mr. M. A. Mulla, P. E.

Attention: Mr. M. A. Mulla, P. E.

Direct any questions concerning submittal review status, review comments, or drawing markups to the following contacts:

Primary Structures Contact:

Paul Lambert
(919) 250-4041
(919) 250-4082 facsimile
plambert@dot.state.nc.us

Secondary Structures Contacts:

James Gaither (919) 250-4042
Man-Pan Hui (919) 250-4044

Eastern Regional Geotechnical Contact (Divisions 1-7):

K. J. Kim
(919) 662-4710
(919) 662-3095 facsimile
kkim@dot.state.nc.us

Western Regional Geotechnical Contact (Divisions 8-14):

Mohammed Mulla
(919) 250-4088
(919) 250-4237 facsimile
mmulla@dot.state.nc.us

3.0 SUBMITTAL COPIES

The quantities provided in this Special Provision act as a guide in the submittal process.

Unless otherwise required by the contract, submit two sets of supporting calculations to the Structure Design Unit.

Furnish one complete copy of the submittal, including all attachments, to the Resident Engineer. If requested, provide additional copies of any submittal. At the same time, submit the following number of copies directly to the Structure Design Unit and/or the Geotechnical Engineering Unit:

Working Drawing Submittal	Copies Required by Structure Design Unit	Copies Required by Geotechnical Engineering Unit	Contract Reference Requiring Submittal ¹
Arch Culvert Falsework	5	0	Plan Note & SN Sheet
Box Culvert Falsework ²	5	0	Plan Note & SN Sheet
Cofferdams ⁴	6	1	Articles 410-5 and 420-8
Expansion Joint Seals (hold down plate type with base angle)	9	0	“Expansion Joint Seals”
Expansion Joint Seals (modular)	2, then 9	0	“Modular Expansion Joint Seals”
Expansion Joint Seals (strip seals)	9	0	“Strip Seals”
Falsework & Forms (superstructure)	8	0	Article 420-3
Falsework & Forms ² (substructure)	8	0	Article 420-3
Mechanically Stabilized Earth Retaining Walls ⁴	7	1	“MSE Retaining Walls”
Metal Bridge Railing	8	0	Plan Note
Metal Stay-in-Place Forms	8	0	Article 420-3
Metalwork for Elastomeric Bearings ^{5,6}	7	0	Article 1072-10
Miscellaneous Metalwork ^{5,6}	7	0	Article 1072-10
Overhead Sign Assemblies	13	0	Article 903-3(C)
Pile Points	7	1	Article 450-8(D) & “Steel Pile Points”
Placement of Equipment on Structures (cranes, etc.)	7	0	Article 420-20

Precast Concrete Box Culverts	2, then 1 reproducible	0	“(Optional) Precast Reinforced Concrete Box Culvert at Station ____”
Precast Retaining Wall Panels	10	0	Article 1077-2
Pot bearings ⁵	8	0	“Pot Bearings”
Prestressed Concrete Deck Panels	6 and 1 reproducible	0	Article 420-3
Proprietary retaining walls ⁴	9	1	Applicable Project Special Provision
Prestressed Concrete Girder (strand elongation and detensioning sequences)	6	0	Articles 1078-8 and 1078-11
Prestressed Concrete Cored Slab (detensioning sequences) ³	6	0	Article 1078-11
Revised Bridge Deck Plans (adaptation to metal stay-in-place forms)	2, then 1 reproducible	0	Article 420-3
Revised Bridge Deck Plans (adaptation to modular expansion joint seals)	2, then 1 reproducible	0	“Modular Expansion Joint Seals”
Soil Nail Retaining Walls ⁴	4	1	Applicable Project Special Provision
Sound Barrier Wall Steel Fabrication Plans ⁶	7	0	Article 1072-10 & “Sound Barrier Wall”
Sound Barrier Wall Casting Plans	10	0	Article 1077-2 & “Sound Barrier Wall”
Structural Steel ⁵	2, then 7	0	Article 1072-10
TFE Expansion Bearings ⁵	8	0	Article 1072-10
Temporary Detour Structures ⁴	10	1	Article 400-3 & “Construction, Maintenance and Removal of Temporary Structure at Station ____”
Temporary Shoring ⁴	6	1	Article 410-4 & “Temporary Shoring for Maintenance of Traffic”

Temporary Fabric or Wire Walls ⁸	0	2	Applicable Project Special Provision
Permanent Anchored Tieback Retaining Walls ⁴	4	1	Applicable Project Special Provision
Evazote Joint Seals ⁷	9	0	Applicable Project Special Provision
Optional Disc Bearings ⁵	8	0	“Optional Disc Bearings”
Removal of Existing Structure over Railroad	5	0	Railroad Special Provisions
Drilled Pier Construction Sequence Plans ⁸	0	2	“Drilled Piers”
Pile Hammers ⁸	0	2	Article 450-6

FOOTNOTES

1. References are provided to help locate the part of the contract where the working drawing submittals are required. References in quotes refer to the Project Special Provision by that name. Articles refer to the Standard Specifications.
2. Submittals for these items are necessary only when plan notes require them.
3. Submittals for these items may not be required. A list of pre-approved sequences is available from the producer or the Materials and Tests Unit.
4. These submittals are reviewed by the Structure Design Unit and the Geotechnical Engineering Unit. If NCDOT Shoring Standards are used, working drawings need not be submitted, but the Shoring Selection Form should be forwarded to the Geotechnical Engineering Unit.
5. The fabricator may submit these items directly to the Structure Design Unit.
6. The two sets of preliminary submittals required by Article 1072-10 of the Standard Specifications are not required for these items.
7. Submittals for Fabrication Drawings are not required. Submission of Catalogue Cuts of Proposed Material is required. See Section 5.A of the Project Special Provision.
8. Submittals for these items are reviewed by the Geotechnical Engineering Unit only and correspondence regarding these items should be directed to and will come from the Geotechnical Engineering Unit.

METRIC STRUCTURAL STEEL**(10-12-01)**

The structural steel for this project is specified in SI (Metric) units with plate thickness designated in millimeters in accordance with AASHTO M160M.

The substitution of structural steel in US Customary nominal thickness is permitted for primary and secondary members defined as follows:

- Primary members - members such as webs and flanges of plate girders, transverse and bearing stiffeners, girder field splice plates, and connector plates for curved girders.
- Secondary members - members such as connector plates for straight girders, bearing plates and miscellaneous hardware.

Such substitution is limited to the values shown in the following table.

Material Specified Metric (mm)	Primary Members US Customary (in)	Secondary Members US Customary (in)
8	3/8	*
9	3/8	*
10	7/16	3/8
11	7/16	*
12	1/2	*
14	9/16	*
16	11/16	5/8
18	3/4	11/16
20	13/16	3/4
22	7/8	*
25	1	*
28	1-1/8	*
30	1-3/16	*
32	1-5/16	1-1/4
35	1-7/16	1-3/8
38	1-1/2	*
40	1-5/8	*
45	1-13/16	*
50	2	*
55	2-1/4	*
60	2-3/8	*
70	2-13/16	2-3/4
* These values are the same as those for Primary members.		

There will be no additional payment for any extra weight incurred as a result of any substitution.

FALSEWORK AND FORMS OVER OR ADJACENT TO TRAFFIC

(10-12-01)

This Special Provision applies in addition to Article 420-3 of the Standard Specifications.

This Special Provision covers falsework or forms including metal stay-in-place forms and precast concrete deck panels erected over vehicular, pedestrian or railroad traffic, or vessel traffic on navigable waterways. It also covers falsework and forms for those parts of a substructure unit constructed within 20 ft. (6 m) of the edge of a travelway or railroad track and more than 25 ft. (7.6 m) above the ground line at the time of substructure construction.

1.0 SUBMITTALS

Submit detailed drawings as required by the Standard Specifications or other Special Provisions and one set of design calculations for falsework and forms for review and acceptance before beginning construction of the falsework or forms. Have the drawings and design calculations prepared, signed and sealed by a North Carolina Registered Professional Engineer. These submittal requirements apply to all falsework and form systems covered by this Special Provision.

2.0 DESIGN

Design falsework and forms for the combined effects of dead load and live load and with appropriate safety factors in accordance with these Special Provisions and the respective design codes of the materials used. Include the weight of concrete, reinforcing steel, forms and falsework in the dead load. Live load includes the actual weight of any equipment the falsework supports, applied as concentrated loads at the points of contact, and a uniform load of not less than 20 lbs/ft² (1.0 kPa) applied over the supported area. In addition, apply a line load of 75 lbs/ft (1.1 kN/m) along the outside edge of deck overhangs.

3.0 INSPECTION

Before the form or falsework system is loaded, inspect the erected falsework and forms and submit a written statement certifying that the erected falsework system complies with the accepted detailed drawings prepared by the Registered Professional Engineer. Submit a separate certification for each span, unit, or bridge component. Any condition that does not comply with the accepted drawings, or any other condition deemed unsatisfactory by the Engineer, is cause for rejection until corrections are made.

4.0 BASIS OF PAYMENT

Payment at the contract unit prices for the various pay items will be full compensation for the above work required for falsework or forms.