


PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM/ QUANTITY BREAKDOWN	TOTAL QUANTITY	
PAVEMENT MARKING LINES				
TA	WHITE EDGELINE	THERMOPLASTIC (4", 90 mils) 2806 ft.	TOTAL	2800 ft.
TI	YELLOW DOUBLE CENTER LINE	THERMOPLASTIC (4", 120 mils) 2806 ft.	TOTAL	2800 ft.
PA	WHITE EDGELINE	PAINT (4") 10222 ft.	TOTAL	20444 ft.
PI	YELLOW DOUBLE CENTER LINE	10222 ft.		
PAVEMENT MARKERS				
MA	YELLOW & YELLOW	PERMANENT RAISED 18 EA	TOTAL	18 EA
MH	YELLOW & YELLOW	TEMPORARY RAISED 76 EA	TOTAL	76 EA

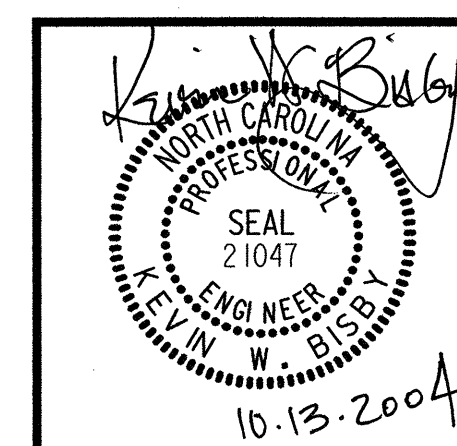

<b>FINAL PAVEMENT MARKINGS</b>	
SCALE: NONE	REVISIONS
DATE: June 2004	
DWG. BY: FDV	
DESIGN BY: KWB	
REVIEWED BY:	