



EDI MODEL 2010ECL CONFLICT MONITOR

PROGRAMMING DETAIL



- NOTES:**
- CARD IS PROVIDED WITH ALL DIODE JUMPERS IN PLACE. REMOVAL OF ANY JUMPER ALLOWS ITS CHANNELS TO RUN CONCURRENTLY.
 - MAKE SURE JUMPERS SEL1-SEL5 ARE PRESENT ON THE MONITOR BOARD.


INPUT FILE POSITION LAYOUT

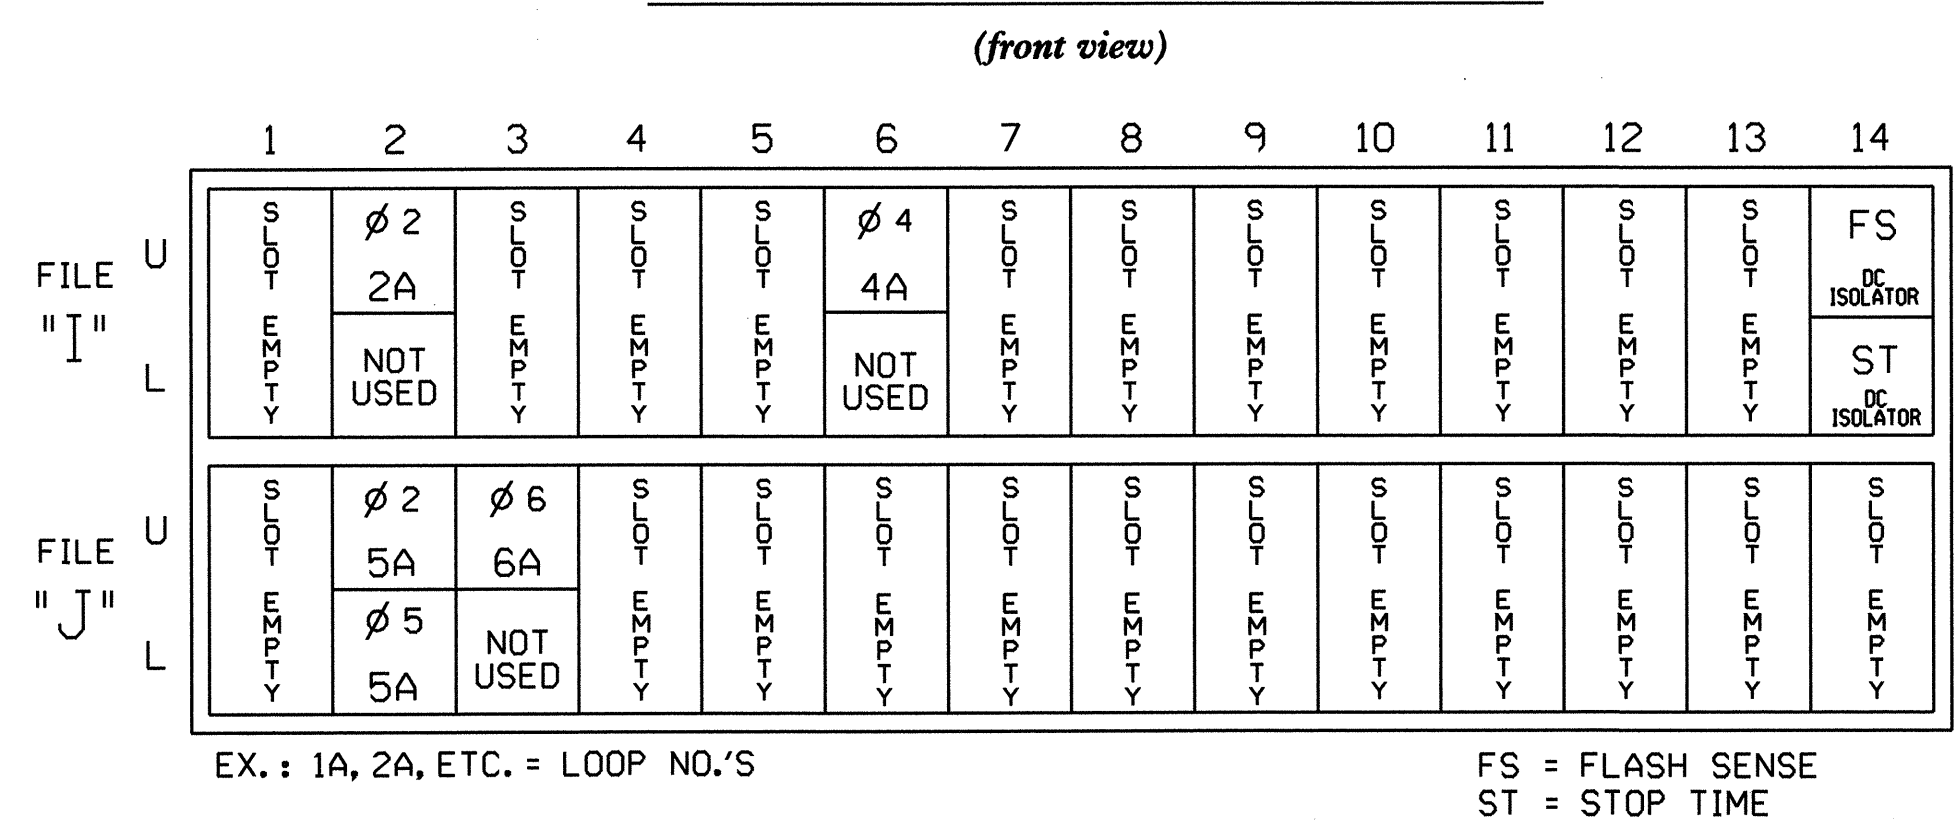

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
2A	TB2-5,6	I2U	39	1	2	2	Y	Y	-	---	---
4A	TB4-9,10	I6U	41	3	4	4	Y	Y	-	---	5
5A ¹	TB3-5,6	J2U	40	2	6	2	Y	Y	-	---	---
	TB3-7,8	J2L	44	6	16	5	Y	Y	-	---	15
6A	TB3-9,10	J3U	64	26	36	6	Y	Y	-	---	---

¹ DENOTES ADD JUMPERS FOR LOOP 5A FROM TB3-5 TO TB3-7, AND FROM TB3-6 TO TB3-8.



NOTES

- TO PREVENT "FLASH-CONFLICT" PROBLEMS, INSERT RED FLASH PROGRAM BLOCKS FOR ALL UNUSED VEHICLE LOAD SWITCHES IN THE OUTPUT FILE. THE INSTALLER SHALL VERIFY THAT SIGNAL HEADS FLASH IN ACCORDANCE WITH THE SIGNAL PLANS.
- ENSURE THAT RED ENABLE IS ACTIVE AT ALL TIMES DURING NORMAL OPERATION. TO PREVENT RED FAILURES ON UNUSED MONITOR CHANNELS, TIE UNUSED RED MONITOR INPUTS 1,3,7,8,9,10,11,12,13,14,15 & 16 TO LOAD SWITCH AC+ PER CABINET MANUFACTURER'S INSTRUCTIONS.
- PROGRAM CONTROLLER TO START UP IN PHASES 2 AND 6 GREEN.
- ENABLE SIMULTANEOUS GAP-OUT FEATURE, ON CONTROLLER UNIT, FOR ALL PHASES.

EQUIPMENT INFORMATION


CONTROLLER.....CONTRACTOR SUPPLIED 2070L
 CABINETCONTRACTOR SUPPLIED 332
 SOFTWAREECONOLITE OASIS
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...12
 LOAD SWITCHES USED.....S2,S4,S5,S6
 PHASES USED.....2,4,5,6
 OVERLAPS.....NONE

FIELD CONNECTION HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S2P	S3	S4	S4P	S5	S6	S6P	S7	S8	S8P
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED
SIGNAL HEAD NO.	NU	21,22	NU	NU	41,42	NU	21	61,62	NU	NU	NU	NU
GREEN		130			103			136				
YELLOW		129			102			135				
RED		128			101		*	134				
RED ARROW												
YELLOW ARROW								132				
GREEN ARROW								133				
⤴												
⤵												

NU = NOT USED
 * DENOTES INSTALL LOAD RESISTOR. SEE LOAD RESISTOR INSTALLATION DETAIL THIS PAGE.

LOAD RESISTOR INSTALLATION DETAIL

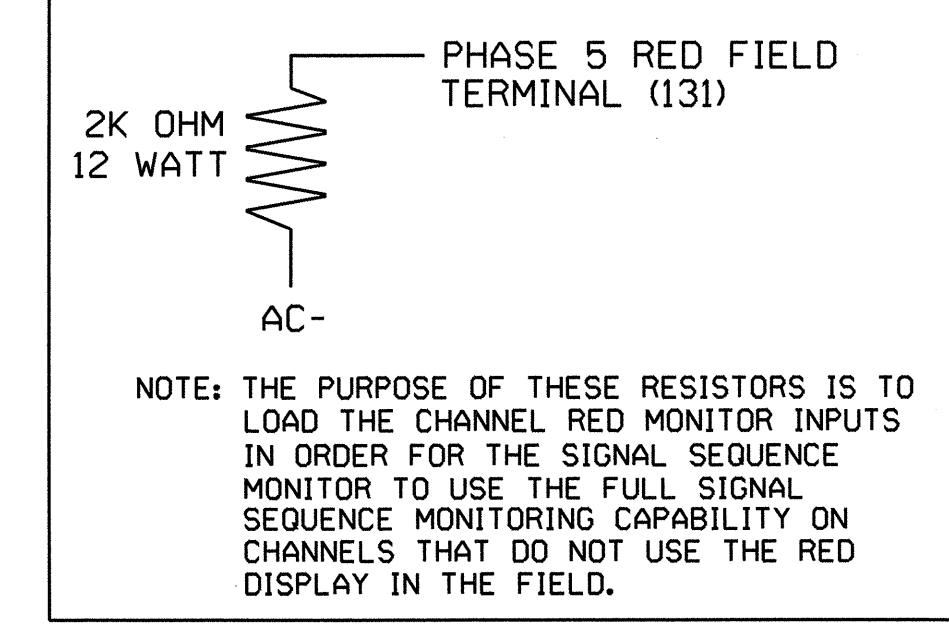

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 13-0710T1
 DESIGNED: 02/15/2003
 SEALED: 02/26/2004
 REVISED: TBD

TEMPORARY SIGNAL 1 - PHASE I TCP 8

ELECTRICAL AND PROGRAMMING DETAILS FOR:
 Prepared for the Offices of:

 122 N. McDowell St., Raleigh, NC 27603

NC 146 (LONG SHOALS ROAD) AT WEST SCHOOL ROAD

DIVISION 13 BUNCOMBE COUNTY ASHEVILLE
 PLAN DATE: JULY 2003 REVIEWED BY: J O DEATON
 PREPARED BY: M W YALCH REVIEWED BY:
 REVISIONS: INIT. DATE

SEAL

 SIGNATURE: *James O. Deaton* DATE: _____
 SIG. INVENTORY NO. 13-0710T1

PLANS PREPARED BY :

RUMMEL KLEPPER & KAHL, LLP
consulting engineers
 5800 FARINGDON PLACE SUITE 105
 RALEIGH, NORTH CAROLINA 27609-3960
FOR
DIVISION OF HIGHWAYS