

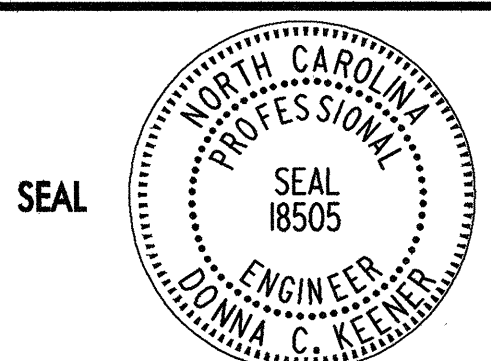
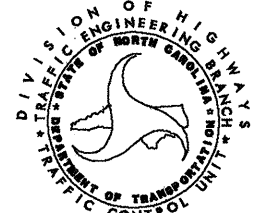


TEMPORARY PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM	QUANTITY BREAKDOWN	TOTAL QUANTITY
<u>PAVEMENT MARKING LINES</u>				
PAINT (100mm)				140790 M
PA	WHITE EDGELINE 2X		53750 M	
PC	3m WHITE SKIP 2X		7800 M	
PD	0.5m WHITE MINISKIP 2X		390 M	
PE	WHITE SOLID LANE LINE 2X		3100 M	
PF	3m YELLOW SKIP 2X		6860 M	
PH	YELLOW SINGLE CENTERLINE 2X		27800 M	
PI	YELLOW DOUBLE CENTERLINE 2X		41090 M	
PAINT (200mm)				250 M
PR	WHITE GORELINE 2X		200 M	
PS	WHITE DIAGONAL 2X		50 M	
PAINT (600mm)				850 M
P4	WHITE STOP BAR 2X		850 M	
<u>PAVEMENT MARKING SYMBOLS</u>				
PAINT SYMBOL				534 M
QA	LEFT TURN ARROW 2X		392 M	
QB	RIGHT TURN ARROW 2X		70 M	
QC	STRAIGHT ARROW 2X		36 M	
QD	COMBINATION STRAIGHT & LEFT ARROW 2X		4 M	
QE	COMBINATION STRAIGHT & RIGHT ARROW 2X		28 M	
QF	COMBINATION LEFT & RIGHT ARROW 2X		4 M	
PAINT CHARACTER				60 M
QI	ALPHANUMERIC CHARACTER 2X		60 M	
<u>TEMPORARY PAVEMENT MARKERS</u>				
TEMPORARY RAISED				4069 EA
MH	YELLOW & YELLOW		2299 EA	
MI	CRYSTAL & RED		1770 EA	

NOTE: FOR EACH PAINT PAVEMENT MARKING ITEM, 1X IMPLIES A SINGLE APPLICATION, 2X IMPLIES TWO APPLICATIONS, AND 3X IMPLIES THREE APPLICATIONS.

\$\$\$SYTIME\$\$\$
 \$\$\$DCN\$\$\$
 \$\$\$SERNAME\$\$\$

APPROVED: <i>Doncken</i> DATE: <i>9/10/04</i>	TEMPORARY PAVEMENT MARKING SCHEDULE	
	SCALE: NONE	REVISIONS
	DATE: 9/10/04	
	DWG. BY: PMW	
	DESIGN BY: PMW	
REVIEWED BY: DCK		CAD FILE: TEMPPMSCH.DGN