

NOTE: SEE SHEET 2A FOR PLAN SHEET LAYOUT AT TIME OF INVESTIGATION

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	B-5141	1	9

CONTENTS

LINE	STATION	PLAN	PROFILE
-L-	10+80 TO 21+15	4	6
-DET-	10+90 TO 20+22	5	7

ROADWAY
SUBSURFACE INVESTIGATION

PROJ. REFERENCE NO. 42302.1.1 (B-5141) F.A. PROJ. BRNHS-0013(25)
COUNTY BERTIE
PROJECT DESCRIPTION BRIDGE NO. 53 ON US 13 OVER WHITE OAK SWAMP

CROSS SECTIONS

LINE	STATION	SHEET
-L-	12+00 TO 13+00	8
-L-	18+50 TO 19+50	9

INVENTORY

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING, AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N.C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. NEITHER THE SUBSURFACE PLANS AND REPORTS, NOR THE FIELD BORING LOGS, ROCK CORES, OR SOIL TEST DATA ARE PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION, AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THIS PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

PERSONNEL

J.L. STONE

J.R. SWARTLEY

C.M. WRIKE


R.E. SMITH

INVESTIGATED BY J.L. STONE

CHECKED BY D.N. ARGENBRIGHT

SUBMITTED BY D.N. ARGENBRIGHT

DATE SEPTEMBER 2012



TIP: B-5141

WBS: 42302

DRAWN BY: C.P. TURNER

NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N.C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IS IT CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.

NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

SUBSURFACE INVESTIGATION

SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION	GRADATION	ROCK DESCRIPTION	TERMS AND DEFINITIONS																																																																																																																																																																														
<p>SOIL IS CONSIDERED TO BE THE UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER, AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO STANDARD PENETRATION TEST (AASHTO T206, ASTM D-1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM, BASIC DESCRIPTIONS GENERALLY SHALL INCLUDE: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. EXAMPLE:</p> <p style="text-align: center;"><i>VERY STIFF, GRAY, SILTY CLAY, MOST WITH INTERBEDDED FINE SAND LAYERS, HEAVY PLASTIC, A-7-6</i></p>	<p>WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORM - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. (ALSO POORLY GRADED) GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLES OF TWO OR MORE SIZES.</p> <p style="text-align: center;">ANGULARITY OF GRAINS</p> <p>THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.</p>	<p>HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT IF TESTED, WOULD YIELD SPT REFUSAL, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. IN NON-COASTAL PLAIN MATERIAL, THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:</p>	<p>ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLODGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS, MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOROUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS IN OR BPF OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SCREC) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SRQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.</p>																																																																																																																																																																														
SOIL LEGEND AND AASHTO CLASSIFICATION																																																																																																																																																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">GENERAL CLASS.</th> <th colspan="7">GRANULAR MATERIALS (< 35% PASSING #200)</th> <th colspan="7">SILT-CLAY MATERIALS (> 35% PASSING #200)</th> <th colspan="3">ORGANIC MATERIALS</th> </tr> <tr> <th>A-1</th> <th>A-3</th> <th>A-2</th> <th>A-4</th> <th>A-5</th> <th>A-6</th> <th>A-7</th> <th>A-1, A-2</th> <th>A-4, A-5</th> <th>A-6, A-7</th> <th>A-1, A-2</th> <th>A-4, A-5</th> <th>A-6, A-7</th> <th>A-1, A-2</th> <th>A-4, A-5</th> <th>A-6, A-7</th> </tr> </thead> <tbody> <tr> <td>GROUP CLASS.</td> <td>A-1-a</td> <td>A-1-b</td> <td>A-2-4</td> <td>A-2-5</td> <td>A-2-6</td> <td>A-2-7</td> <td>A-4</td> <td>A-5</td> <td>A-6</td> <td>A-7</td> <td>A-1-a</td> <td>A-1-b</td> <td>A-2</td> <td>A-3</td> <td>A-4</td> <td>A-5</td> </tr> <tr> <td>SYMBOL</td> <td colspan="7"></td> <td colspan="7"></td> <td colspan="3"></td> </tr> <tr> <td>% PASSING</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> <td>10</td> </tr> <tr> <td>LIQUID LIMIT PLASTIC INDEX</td> <td>6 MX</td> <td>NP</td> <td>40 MN</td> <td>41 MN</td> <td>40 MN</td> <td>41 MN</td> <td>40 MN</td> <td>41 MN</td> <td>40 MN</td> <td>41 MN</td> <td>40 MN</td> <td>41 MN</td> <td>40 MN</td> <td>41 MN</td> <td>40 MN</td> <td>41 MN</td> </tr> <tr> <td>GROUP INDEX</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>4 MX</td> <td>0</td> <td>8 MX</td> <td>12 MX</td> <td>16 MX</td> <td>10 MX</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>USUAL TYPES OF MAJOR MATERIALS</td> <td colspan="2">STONE FRAGS. GRAVEL AND SAND</td> <td colspan="2">FINE SAND</td> <td colspan="3">SILTY OR CLAYEY GRAVEL AND SAND</td> <td colspan="3">SILTY SOILS</td> <td colspan="3">CLAYEY SOILS</td> <td colspan="3">SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER</td> </tr> <tr> <td>GENERAL RATING AS A SUBGRADE</td> <td colspan="7">EXCELLENT TO GOOD</td> <td colspan="3">FAIR TO POOR</td> <td colspan="3">FAIR TO POOR</td> <td colspan="3">POOR</td> </tr> </tbody> </table> <p style="text-align: center;">PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30</p>	GENERAL CLASS.	GRANULAR MATERIALS (< 35% PASSING #200)							SILT-CLAY MATERIALS (> 35% PASSING #200)							ORGANIC MATERIALS			A-1	A-3	A-2	A-4	A-5	A-6	A-7	A-1, A-2	A-4, A-5	A-6, A-7	A-1, A-2	A-4, A-5	A-6, A-7	A-1, A-2	A-4, A-5	A-6, A-7	GROUP CLASS.	A-1-a	A-1-b	A-2-4	A-2-5	A-2-6	A-2-7	A-4	A-5	A-6	A-7	A-1-a	A-1-b	A-2	A-3	A-4	A-5	SYMBOL																		% PASSING	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	LIQUID LIMIT PLASTIC INDEX	6 MX	NP	40 MN	41 MN	40 MN	41 MN	40 MN	41 MN	40 MN	41 MN	40 MN	41 MN	40 MN	41 MN	40 MN	41 MN	GROUP INDEX	0	0	0	0	4 MX	0	8 MX	12 MX	16 MX	10 MX	0	0	0	0	0	0	USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS. GRAVEL AND SAND		FINE SAND		SILTY OR CLAYEY GRAVEL AND SAND			SILTY SOILS			CLAYEY SOILS			SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER			GENERAL RATING AS A SUBGRADE	EXCELLENT TO GOOD							FAIR TO POOR			FAIR TO POOR			POOR			<p>MINERALOGICAL COMPOSITION</p> <p>MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHENEVER THEY ARE CONSIDERED OF SIGNIFICANCE.</p> <p style="text-align: center;">COMPRESSIBILITY</p> <p>SLIGHTLY COMPRESSIBLE LIQUID LIMIT LESS THAN 31 MODERATELY COMPRESSIBLE LIQUID LIMIT EQUAL TO 31-50 HIGHLY COMPRESSIBLE LIQUID LIMIT GREATER THAN 50</p> <p style="text-align: center;">PERCENTAGE OF MATERIAL</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>GRANULAR SOILS</th> <th>SILT - CLAY SOILS</th> <th>OTHER MATERIAL</th> </tr> </thead> <tbody> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td> <td>3 - 5%</td> <td>TRACE</td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td> <td>5 - 12%</td> <td>LITTLE</td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td> <td>12 - 20%</td> <td>SOME</td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>>10%</td> <td>>20%</td> <td>HIGHLY</td> </tr> </tbody> </table> <p style="text-align: center;">GROUND WATER</p> <p> WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING</p> <p> STATIC WATER LEVEL AFTER 24 HOURS</p> <p> PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA</p> <p> SPRING OR SEEP</p>				GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL	TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE	LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE	MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME	HIGHLY ORGANIC	>10%	>20%	HIGHLY
GENERAL CLASS.		GRANULAR MATERIALS (< 35% PASSING #200)							SILT-CLAY MATERIALS (> 35% PASSING #200)							ORGANIC MATERIALS																																																																																																																																																																	
	A-1	A-3	A-2	A-4	A-5	A-6	A-7	A-1, A-2	A-4, A-5	A-6, A-7	A-1, A-2	A-4, A-5	A-6, A-7	A-1, A-2	A-4, A-5	A-6, A-7																																																																																																																																																																	
GROUP CLASS.	A-1-a	A-1-b	A-2-4	A-2-5	A-2-6	A-2-7	A-4	A-5	A-6	A-7	A-1-a	A-1-b	A-2	A-3	A-4	A-5																																																																																																																																																																	
SYMBOL																																																																																																																																																																																	
% PASSING	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10																																																																																																																																																																	
LIQUID LIMIT PLASTIC INDEX	6 MX	NP	40 MN	41 MN	40 MN	41 MN	40 MN	41 MN	40 MN	41 MN	40 MN	41 MN	40 MN	41 MN	40 MN	41 MN																																																																																																																																																																	
GROUP INDEX	0	0	0	0	4 MX	0	8 MX	12 MX	16 MX	10 MX	0	0	0	0	0	0																																																																																																																																																																	
USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS. GRAVEL AND SAND		FINE SAND		SILTY OR CLAYEY GRAVEL AND SAND			SILTY SOILS			CLAYEY SOILS			SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER																																																																																																																																																																			
GENERAL RATING AS A SUBGRADE	EXCELLENT TO GOOD							FAIR TO POOR			FAIR TO POOR			POOR																																																																																																																																																																			
	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL																																																																																																																																																																														
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE																																																																																																																																																																														
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE																																																																																																																																																																														
MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME																																																																																																																																																																														
HIGHLY ORGANIC	>10%	>20%	HIGHLY																																																																																																																																																																														
CONSISTENCY OR DENSENESS																																																																																																																																																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>PRIMARY SOIL TYPE</th> <th>COMPACTNESS OR CONSISTENCY</th> <th>RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)</th> <th>RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TDNS/F²)</th> </tr> </thead> <tbody> <tr> <td>GENERALLY GRANULAR MATERIAL (NON-COHESIVE)</td> <td>VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE</td> <td><4 4 TO 10 10 TO 30 30 TO 50 >50</td> <td>N/A</td> </tr> <tr> <td>GENERALLY SILT-CLAY MATERIAL (COHESIVE)</td> <td>VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD</td> <td><2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 >30</td> <td><0.25 0.25 TO 0.50 0.5 TO 1.0 1 TO 2 2 TO 4 >4</td> </tr> </tbody> </table>	PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TDNS/F ²)	GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	<4 4 TO 10 10 TO 30 30 TO 50 >50	N/A	GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	<2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 >30	<0.25 0.25 TO 0.50 0.5 TO 1.0 1 TO 2 2 TO 4 >4	<p style="text-align: center;">MISCELLANEOUS SYMBOLS</p> <p> ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION</p> <p> SOIL SYMBOL</p> <p> ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT</p> <p> INFERRED SOIL BOUNDARY</p> <p> INFERRED ROCK LINE</p> <p> ALLUVIAL SOIL BOUNDARY</p> <p> DIP & DIP DIRECTION OF ROCK STRUCTURES</p> <p> SPT TEST BORING</p> <p> AUGER BORING</p> <p> CORE BORING</p> <p> MONITORING WELL</p> <p> PIEZOMETER INSTALLATION</p> <p> SLOPE INDICATOR INSTALLATION</p> <p> CONE PENETROMETER TEST</p> <p> SOUNDING ROD</p>																																																																																																																																																																				
PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TDNS/F ²)																																																																																																																																																																														
GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	<4 4 TO 10 10 TO 30 30 TO 50 >50	N/A																																																																																																																																																																														
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	<2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 >30	<0.25 0.25 TO 0.50 0.5 TO 1.0 1 TO 2 2 TO 4 >4																																																																																																																																																																														
TEXTURE OR GRAIN SIZE																																																																																																																																																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>U.S. STD. SIEVE SIZE OPENING (MM)</th> <th>4</th> <th>10</th> <th>40</th> <th>60</th> <th>200</th> <th>270</th> </tr> </thead> <tbody> <tr> <td></td> <td>4.76</td> <td>2.00</td> <td>0.42</td> <td>0.25</td> <td>0.075</td> <td>0.053</td> </tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>BOULDER (BLDR.)</th> <th>COBBLE (COB.)</th> <th>GRAVEL (GR.)</th> <th>COARSE SAND (CSE. SD.)</th> <th>FINE SAND (F SD.)</th> <th>SILT (SL.)</th> <th>CLAY (CL.)</th> </tr> </thead> <tbody> <tr> <td>GRAIN SIZE</td> <td>MM 305 IN. 12</td> <td>75 3</td> <td>2.0</td> <td>0.25</td> <td>0.05</td> <td>0.005</td> </tr> </tbody> </table>	U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270		4.76	2.00	0.42	0.25	0.075	0.053	BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)	GRAIN SIZE	MM 305 IN. 12	75 3	2.0	0.25	0.05	0.005	<p style="text-align: center;">ABBREVIATIONS</p> <table border="0" style="width: 100%;"> <tr> <td>AR - AUGER REFUSAL</td> <td>MED. - MEDIUM</td> <td>VST - VANE SHEAR TEST</td> </tr> <tr> <td>BT - BORING TERMINATED</td> <td>MICA - MICAECIOUS</td> <td>WEA. - WEATHERED</td> </tr> <tr> <td>CL. - CLAY</td> <td>MOD. - MODERATELY</td> <td>γ - UNIT WEIGHT</td> </tr> <tr> <td>CPT - CONE PENETRATION TEST</td> <td>NP - NON PLASTIC</td> <td>γ_d - DRY UNIT WEIGHT</td> </tr> <tr> <td>CSE. - COARSE</td> <td>ORG. - ORGANIC</td> <td>SAMPLE ABBREVIATIONS</td> </tr> <tr> <td>DMT - DILATOMETER TEST</td> <td>PMT - PRESSUREMETER TEST</td> <td>S - BULK</td> </tr> <tr> <td>DPT - DYNAMIC PENETRATION TEST</td> <td>SAP. - SAPROLITIC</td> <td>SS - SPLIT SPOON</td> </tr> <tr> <td>ø - VOID RATIO</td> <td>SD. - SAND, SANDY</td> <td>ST - SHELBY TUBE</td> </tr> <tr> <td>F - FINE</td> <td>SL. - SILT, SILTY</td> <td>RS - ROCK</td> </tr> <tr> <td>FOSS. - FOSSILIFEROUS</td> <td>SLI. - SLIGHTLY</td> <td>RT - RECOMPACTED TRIAXIAL</td> </tr> <tr> <td>FRAC. - FRACTURED, FRACTURES</td> <td>TCR - TRICONE REFUSAL</td> <td>CBR - CALIFORNIA BEARING RATIO</td> </tr> <tr> <td>FRAGS. - FRAGMENTS</td> <td>w - MOISTURE CONTENT</td> <td></td> </tr> <tr> <td>HI. - HIGHLY</td> <td>v - VERY</td> <td></td> </tr> </table>			AR - AUGER REFUSAL	MED. - MEDIUM	VST - VANE SHEAR TEST	BT - BORING TERMINATED	MICA - MICAECIOUS	WEA. - WEATHERED	CL. - CLAY	MOD. - MODERATELY	γ - UNIT WEIGHT	CPT - CONE PENETRATION TEST	NP - NON PLASTIC	γ _d - DRY UNIT WEIGHT	CSE. - COARSE	ORG. - ORGANIC	SAMPLE ABBREVIATIONS	DMT - DILATOMETER TEST	PMT - PRESSUREMETER TEST	S - BULK	DPT - DYNAMIC PENETRATION TEST	SAP. - SAPROLITIC	SS - SPLIT SPOON	ø - VOID RATIO	SD. - SAND, SANDY	ST - SHELBY TUBE	F - FINE	SL. - SILT, SILTY	RS - ROCK	FOSS. - FOSSILIFEROUS	SLI. - SLIGHTLY	RT - RECOMPACTED TRIAXIAL	FRAC. - FRACTURED, FRACTURES	TCR - TRICONE REFUSAL	CBR - CALIFORNIA BEARING RATIO	FRAGS. - FRAGMENTS	w - MOISTURE CONTENT		HI. - HIGHLY	v - VERY																																																																																																												
U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270																																																																																																																																																																											
	4.76	2.00	0.42	0.25	0.075	0.053																																																																																																																																																																											
BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)																																																																																																																																																																											
GRAIN SIZE	MM 305 IN. 12	75 3	2.0	0.25	0.05	0.005																																																																																																																																																																											
AR - AUGER REFUSAL	MED. - MEDIUM	VST - VANE SHEAR TEST																																																																																																																																																																															
BT - BORING TERMINATED	MICA - MICAECIOUS	WEA. - WEATHERED																																																																																																																																																																															
CL. - CLAY	MOD. - MODERATELY	γ - UNIT WEIGHT																																																																																																																																																																															
CPT - CONE PENETRATION TEST	NP - NON PLASTIC	γ _d - DRY UNIT WEIGHT																																																																																																																																																																															
CSE. - COARSE	ORG. - ORGANIC	SAMPLE ABBREVIATIONS																																																																																																																																																																															
DMT - DILATOMETER TEST	PMT - PRESSUREMETER TEST	S - BULK																																																																																																																																																																															
DPT - DYNAMIC PENETRATION TEST	SAP. - SAPROLITIC	SS - SPLIT SPOON																																																																																																																																																																															
ø - VOID RATIO	SD. - SAND, SANDY	ST - SHELBY TUBE																																																																																																																																																																															
F - FINE	SL. - SILT, SILTY	RS - ROCK																																																																																																																																																																															
FOSS. - FOSSILIFEROUS	SLI. - SLIGHTLY	RT - RECOMPACTED TRIAXIAL																																																																																																																																																																															
FRAC. - FRACTURED, FRACTURES	TCR - TRICONE REFUSAL	CBR - CALIFORNIA BEARING RATIO																																																																																																																																																																															
FRAGS. - FRAGMENTS	w - MOISTURE CONTENT																																																																																																																																																																																
HI. - HIGHLY	v - VERY																																																																																																																																																																																
SOIL MOISTURE - CORRELATION OF TERMS																																																																																																																																																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</th> <th>FIELD MOISTURE DESCRIPTION</th> <th>GUIDE FOR FIELD MOISTURE DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td>LL - LIQUID LIMIT</td> <td>- SATURATED - (SAT.)</td> <td>USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE</td> </tr> <tr> <td>PLASTIC RANGE (PI)</td> <td>- WET - (W)</td> <td>SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td>OM - OPTIMUM MOISTURE</td> <td>- MOIST - (M)</td> <td>SOLID; AT OR NEAR OPTIMUM MOISTURE</td> </tr> <tr> <td>SL - SHRINKAGE LIMIT</td> <td>- DRY - (D)</td> <td>REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> </tbody> </table>	SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION	LL - LIQUID LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE	PLASTIC RANGE (PI)	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE	OM - OPTIMUM MOISTURE	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE	SL - SHRINKAGE LIMIT	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE	<p style="text-align: center;">EQUIPMENT USED ON SUBJECT PROJECT</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>DRILL UNITS:</th> <th>ADVANCING TOOLS:</th> <th>HAMMER TYPE:</th> </tr> </thead> <tbody> <tr> <td><input type="checkbox"/> MOBILE B-___</td> <td><input type="checkbox"/> CLAY BITS</td> <td><input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL</td> </tr> <tr> <td><input type="checkbox"/> BK-51</td> <td><input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER</td> <td>CORE SIZE:</td> </tr> <tr> <td><input type="checkbox"/> CME-45C</td> <td><input type="checkbox"/> 8" HOLLOW AUGERS</td> <td><input type="checkbox"/> -B-</td> </tr> <tr> <td><input checked="" type="checkbox"/> CME-55D</td> <td><input type="checkbox"/> HARD FACED FINGER BITS</td> <td><input type="checkbox"/> -N-</td> </tr> <tr> <td><input type="checkbox"/> PORTABLE HOIST</td> <td><input type="checkbox"/> TUNG-CARBIDE INSERTS</td> <td><input type="checkbox"/> -H-</td> </tr> <tr> <td><input type="checkbox"/> _____</td> <td><input checked="" type="checkbox"/> CASING <input type="checkbox"/> w/ ADVANCER</td> <td>HAND TOOLS:</td> </tr> <tr> <td><input type="checkbox"/> _____</td> <td><input checked="" type="checkbox"/> TRICONE 2 1/8" *STEEL TEETH</td> <td><input type="checkbox"/> POST HOLE DIGGER</td> </tr> <tr> <td><input type="checkbox"/> _____</td> <td><input type="checkbox"/> TRICONE _____ * TUNG-CARB.</td> <td><input type="checkbox"/> HAND AUGER</td> </tr> <tr> <td><input type="checkbox"/> _____</td> <td><input type="checkbox"/> CORE BIT</td> <td><input type="checkbox"/> SOUNDING ROD</td> </tr> <tr> <td><input type="checkbox"/> _____</td> <td><input type="checkbox"/> _____</td> <td><input type="checkbox"/> VANE SHEAR TEST</td> </tr> </tbody> </table>			DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:	<input type="checkbox"/> MOBILE B-___	<input type="checkbox"/> CLAY BITS	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL	<input type="checkbox"/> BK-51	<input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER	CORE SIZE:	<input type="checkbox"/> CME-45C	<input type="checkbox"/> 8" HOLLOW AUGERS	<input type="checkbox"/> -B-	<input checked="" type="checkbox"/> CME-55D	<input type="checkbox"/> HARD FACED FINGER BITS	<input type="checkbox"/> -N-	<input type="checkbox"/> PORTABLE HOIST	<input type="checkbox"/> TUNG-CARBIDE INSERTS	<input type="checkbox"/> -H-	<input type="checkbox"/> _____	<input checked="" type="checkbox"/> CASING <input type="checkbox"/> w/ ADVANCER	HAND TOOLS:	<input type="checkbox"/> _____	<input checked="" type="checkbox"/> TRICONE 2 1/8" *STEEL TEETH	<input type="checkbox"/> POST HOLE DIGGER	<input type="checkbox"/> _____	<input type="checkbox"/> TRICONE _____ * TUNG-CARB.	<input type="checkbox"/> HAND AUGER	<input type="checkbox"/> _____	<input type="checkbox"/> CORE BIT	<input type="checkbox"/> SOUNDING ROD	<input type="checkbox"/> _____	<input type="checkbox"/> _____	<input type="checkbox"/> VANE SHEAR TEST																																																																																																																														
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION																																																																																																																																																																															
LL - LIQUID LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE																																																																																																																																																																															
PLASTIC RANGE (PI)	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE																																																																																																																																																																															
OM - OPTIMUM MOISTURE	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE																																																																																																																																																																															
SL - SHRINKAGE LIMIT	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																																																																																																															
DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:																																																																																																																																																																															
<input type="checkbox"/> MOBILE B-___	<input type="checkbox"/> CLAY BITS	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL																																																																																																																																																																															
<input type="checkbox"/> BK-51	<input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER	CORE SIZE:																																																																																																																																																																															
<input type="checkbox"/> CME-45C	<input type="checkbox"/> 8" HOLLOW AUGERS	<input type="checkbox"/> -B-																																																																																																																																																																															
<input checked="" type="checkbox"/> CME-55D	<input type="checkbox"/> HARD FACED FINGER BITS	<input type="checkbox"/> -N-																																																																																																																																																																															
<input type="checkbox"/> PORTABLE HOIST	<input type="checkbox"/> TUNG-CARBIDE INSERTS	<input type="checkbox"/> -H-																																																																																																																																																																															
<input type="checkbox"/> _____	<input checked="" type="checkbox"/> CASING <input type="checkbox"/> w/ ADVANCER	HAND TOOLS:																																																																																																																																																																															
<input type="checkbox"/> _____	<input checked="" type="checkbox"/> TRICONE 2 1/8" *STEEL TEETH	<input type="checkbox"/> POST HOLE DIGGER																																																																																																																																																																															
<input type="checkbox"/> _____	<input type="checkbox"/> TRICONE _____ * TUNG-CARB.	<input type="checkbox"/> HAND AUGER																																																																																																																																																																															
<input type="checkbox"/> _____	<input type="checkbox"/> CORE BIT	<input type="checkbox"/> SOUNDING ROD																																																																																																																																																																															
<input type="checkbox"/> _____	<input type="checkbox"/> _____	<input type="checkbox"/> VANE SHEAR TEST																																																																																																																																																																															
PLASTICITY																																																																																																																																																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>NONPLASTIC</th> <th>PLASTICITY INDEX (PI)</th> <th>DRY STRENGTH</th> </tr> </thead> <tbody> <tr> <td>LOW PLASTICITY</td> <td>0-5</td> <td>VERY LOW</td> </tr> <tr> <td>MED. PLASTICITY</td> <td>6-15</td> <td>SLIGHT</td> </tr> <tr> <td>HIGH PLASTICITY</td> <td>16-25</td> <td>MEDIUM</td> </tr> <tr> <td></td> <td>26 OR MORE</td> <td>HIGH</td> </tr> </tbody> </table>	NONPLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH	LOW PLASTICITY	0-5	VERY LOW	MED. PLASTICITY	6-15	SLIGHT	HIGH PLASTICITY	16-25	MEDIUM		26 OR MORE	HIGH	<p style="text-align: center;">ROCK HARDNESS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>VERY HARD</th> <th>HARD</th> <th>MODERATELY HARD</th> <th>MEDIUM HARD</th> <th>SOFT</th> <th>VERY SOFT</th> </tr> </thead> <tbody> <tr> <td>CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.</td> <td>CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.</td> <td>CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.</td> <td>CAN BE GROUVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PEICES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.</td> <td>CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.</td> <td>CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.</td> </tr> </tbody> </table>			VERY HARD	HARD	MODERATELY HARD	MEDIUM HARD	SOFT	VERY SOFT	CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.	CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.	CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.	CAN BE GROUVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PEICES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.	CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.	CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																																																																																																																																																			
NONPLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH																																																																																																																																																																															
LOW PLASTICITY	0-5	VERY LOW																																																																																																																																																																															
MED. PLASTICITY	6-15	SLIGHT																																																																																																																																																																															
HIGH PLASTICITY	16-25	MEDIUM																																																																																																																																																																															
	26 OR MORE	HIGH																																																																																																																																																																															
VERY HARD	HARD	MODERATELY HARD	MEDIUM HARD	SOFT	VERY SOFT																																																																																																																																																																												
CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.	CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.	CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.	CAN BE GROUVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PEICES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.	CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.	CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																																																																																																																																																																												
FRACTURE SPACING																																																																																																																																																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>TERM</th> <th>SPACING</th> </tr> </thead> <tbody> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> </tr> <tr> <td>CLOSE</td> <td>0.16 TO 1 FEET</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 0.16 FEET</td> </tr> </tbody> </table>	TERM	SPACING	VERY WIDE	MORE THAN 10 FEET	WIDE	3 TO 10 FEET	MODERATELY CLOSE	1 TO 3 FEET	CLOSE	0.16 TO 1 FEET	VERY CLOSE	LESS THAN 0.16 FEET	<p style="text-align: center;">BEDDING</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>TERM</th> <th>THICKNESS</th> </tr> </thead> <tbody> <tr> <td>VERY THICKLY BEDDED</td> <td>> 4 FEET</td> </tr> <tr> <td>THICKLY BEDDED</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>THINLY BEDDED</td> <td>0.16 - 1.5 FEET</td> </tr> <tr> <td>VERY THINLY BEDDED</td> <td>0.03 - 0.16 FEET</td> </tr> <tr> <td>THICKLY LAMINATED</td> <td>0.008 - 0.03 FEET</td> </tr> <tr> <td>THINLY LAMINATED</td> <td>< 0.008 FEET</td> </tr> </tbody> </table>			TERM	THICKNESS	VERY THICKLY BEDDED	> 4 FEET	THICKLY BEDDED	1.5 - 4 FEET	THINLY BEDDED	0.16 - 1.5 FEET	VERY THINLY BEDDED	0.03 - 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET	THINLY LAMINATED	< 0.008 FEET																																																																																																																																																				
TERM	SPACING																																																																																																																																																																																
VERY WIDE	MORE THAN 10 FEET																																																																																																																																																																																
WIDE	3 TO 10 FEET																																																																																																																																																																																
MODERATELY CLOSE	1 TO 3 FEET																																																																																																																																																																																
CLOSE	0.16 TO 1 FEET																																																																																																																																																																																
VERY CLOSE	LESS THAN 0.16 FEET																																																																																																																																																																																
TERM	THICKNESS																																																																																																																																																																																
VERY THICKLY BEDDED	> 4 FEET																																																																																																																																																																																
THICKLY BEDDED	1.5 - 4 FEET																																																																																																																																																																																
THINLY BEDDED	0.16 - 1.5 FEET																																																																																																																																																																																
VERY THINLY BEDDED	0.03 - 0.16 FEET																																																																																																																																																																																
THICKLY LAMINATED	0.008 - 0.03 FEET																																																																																																																																																																																
THINLY LAMINATED	< 0.008 FEET																																																																																																																																																																																
INDURATION																																																																																																																																																																																	
<p>FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF THE MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>FRIABLE</th> <th>MODERATELY INDURATED</th> <th>INDURATED</th> <th>EXTREMELY INDURATED</th> </tr> </thead> <tbody> <tr> <td>RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.</td> <td>GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.</td> <td>GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.</td> <td>SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.</td> </tr> </tbody> </table>				FRIABLE	MODERATELY INDURATED	INDURATED	EXTREMELY INDURATED	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.																																																																																																																																																																						
FRIABLE	MODERATELY INDURATED	INDURATED	EXTREMELY INDURATED																																																																																																																																																																														
RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.																																																																																																																																																																														
INDURATION																																																																																																																																																																																	
<p>FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF THE MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>FRIABLE</th> <th>MODERATELY INDURATED</th> <th>INDURATED</th> <th>EXTREMELY INDURATED</th> </tr> </thead> <tbody> <tr> <td>RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.</td> <td>GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.</td> <td>GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.</td> <td>SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.</td> </tr> </tbody> </table>				FRIABLE	MODERATELY INDURATED	INDURATED	EXTREMELY INDURATED	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.																																																																																																																																																																						
FRIABLE	MODERATELY INDURATED	INDURATED	EXTREMELY INDURATED																																																																																																																																																																														
RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.																																																																																																																																																																														
BENCH MARK:																																																																																																																																																																																	
ELEVATION: _____ FT.																																																																																																																																																																																	
NOTES:																																																																																																																																																																																	

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	B-5141	2A	9
STATE PROJ. NO.	P.A. PROJ. NO.	DESCRIPTION	
42302.1.1	BRNHS-0013(25)	PE	


STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

BERTIE COUNTY

LOCATION: BRIDGE 53 ON US 13 OVER WHITE OAK SWAMP


TYPE OF WORK: GRADING, DRAINAGE, PAVING, AND STRUCTURE

See Sheet 1-A For Index of Sheets

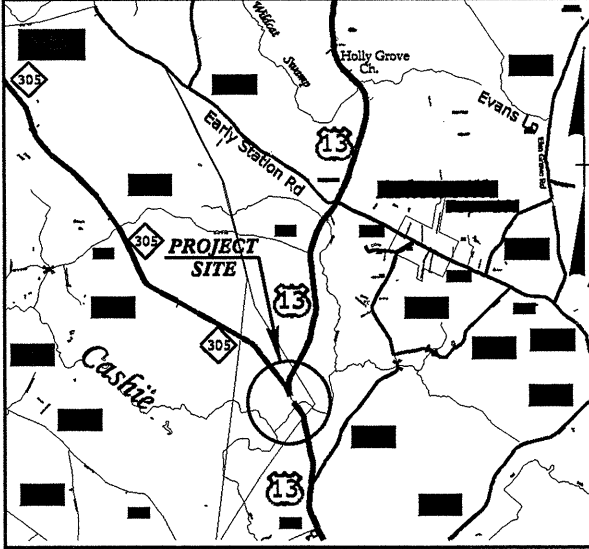


VICINITY MAP


CONTRACT: TIP PROJECT: B-5141

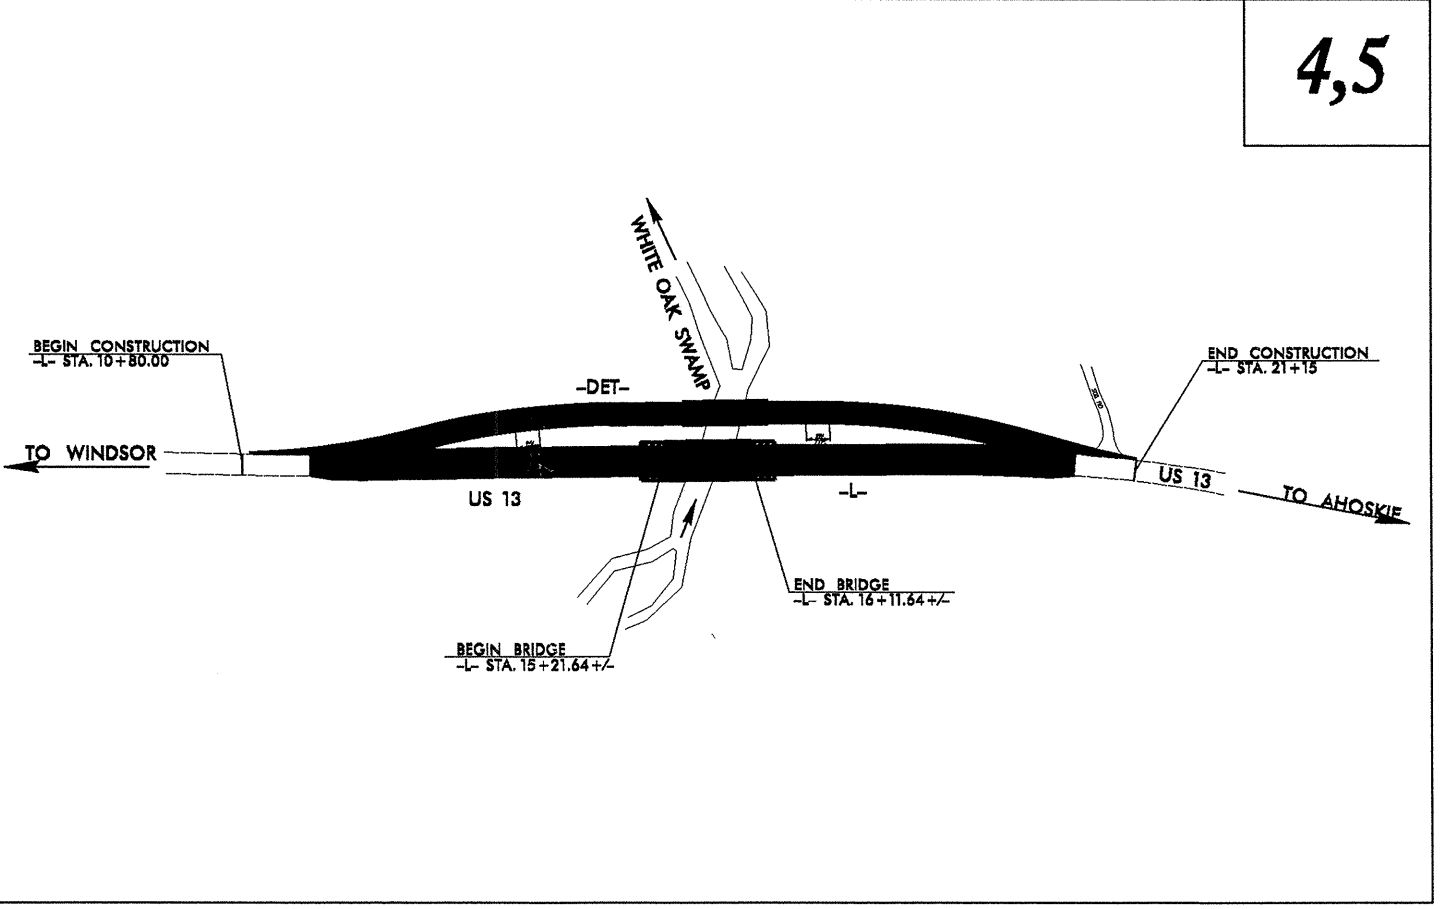

4,5



INCOMPLETE PLANS
DO NOT USE FOR R/W ACQUISITION
PRELIMINARY PLANS
DO NOT USE FOR CONSTRUCTION



DESIGN DATA

ADT 2009 =	5,000
ADT 2035 =	9,500
DHV =	9 %
D =	55 %
T =	12 % *
V =	60 MPH
* TTST =	5% DUAL 7%
FUNC CLASS =	MINOR ARTERIAL
REGIONAL TIER	

PROJECT LENGTH

LENGTH OF ROADWAY TIP PROJECT B-5141 =	???? MILES
LENGTH OF STRUCTURE TIP PROJECT B-5141 =	???? MILES
TOTAL LENGTH OF TIP PROJECT B-5141 =	0.211 MILES

Prepared in the Office of:
DIVISION OF HIGHWAYS
1000 Birch Ridge Dr., Raleigh NC, 27610

2012 STANDARD SPECIFICATIONS	
PRODUCTION RIGHT OF WAY DATE: FEBRUARY 15, 2013	G.E. BREW, PE PROJECT ENGINEER
PRODUCTION LETTING DATE: MAY 20, 2014	I.T. YOUNIS PROJECT DESIGN ENGINEER

HYDRAULICS ENGINEER

SIGNATURE: _____ P.E.

ROADWAY DESIGN ENGINEER

SIGNATURE: _____ P.E.



25-SEP-2012 11:31 L:\PROJ\Grenville_Inv\est\1401\TIP\B5141_GEO_RDWY\CADD_GEO\TECH\SITE&Sub\B5141_GEO_RDY_TITLE_LEGEND.dgn



STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

BEVERLY EAVES PERDUE
GOVERNOR

EUGENE A. CONTI, JR.
SECRETARY

September 25, 2012

STATE PROJECT: 42302.1.1 (B-5141)
F.A. PROJECT: BRNHS-0013(25)
COUNTY: Bertie
DESCRIPTION: Bridge No. 53 on US 13 over White Oak Swamp

SUBJECT: Geotechnical Inventory Report

Project Description

This project is located at the existing US 13 bridge over White Oak Swamp, just south of the US 13/NC305 intersection in Bertie County. This geotechnical investigation was confined to the areas of proposed construction.

Fieldwork was conducted in June of 2012. SPT and hand auger borings were completed at various offsets along the project corridor. Representative soil samples were collected for visual classification in the field and for laboratory analysis by the Materials and Tests Unit.

The following alignments were investigated. Subsurface profiles and selected cross sections of these alignments are included in this report.

<u>Line</u>	<u>Station(±)</u>
-L-	11+50 to 19+50
-DET-	10+00 to 21+22

Areas of Special Geotechnical Interest

1) The following sections were found to exhibit seasonal high ground water.

<u>Line</u>	<u>Station(±)</u>
-L-	13+00 to 21+15

MAILING ADDRESS:
NC DEPARTMENT OF TRANSPORTATION
GEOTECHNICAL ENGINEERING UNIT
1589 MAIL SERVICE CENTER
RALEIGH NC 27699-1589

TELEPHONE: 919-707-6850
FAX: 919-250-4237
WEBSITE: WWW.DOH.DOT.STATE.NC.US

LOCATION:
CENTURY CENTER COMPLEX
ENTRANCE B-2
1020 BIRCH RIDGE DRIVE
RALEIGH NC

-DET-

13+00 to 20+22

2) The entire project was found to contain cohesive soils that have the potential to cause embankment/subgrade and or slope stability problems during construction.

Physiography and Geology

This project corridor is located within the Coastal Plain Physiographic Province. Topography along the project is nearly flat to gently sloping. Natural ground elevations ranged from 31± feet above sea level along the existing US 13 embankment to 12± feet above sea level along the bed of White Oak Swamp.

Surficial soils in this area have been classified as undivided coastal plain and alluvial sediments and are underlain by formational soils belonging to the Yorktown Formation.

Ground Water

Ground water data was collected in June of 2012, during a time of normal precipitation. Ground water elevations ranged from 15± to 23± feet above sea level.

Soils

Soils encountered within this project area have been divided into four categories, undivided coastal plain soils, formational soils, alluvial soils, and roadway embankment.

Soils identified as undivided coastal plain were encountered along the upland sections at the beginning and the end of the project. They are composed of 2± to 3 or more feet of soft to stiff sandy clay (A-6) and 1± to 3± feet of loose sand (A-2-4, A-3).

Formational soils belonging to the Yorktown Formation were also encountered. They were composed of 8 or more feet of soft to medium stiff silty clay (A-7-6).

Roadway embankment soils were found along the existing US 13 corridor. They are composed of 2± to 11± feet of loose to dense sand.

Alluvial soils were found within the White Oak Swamp floodplain. These units were comprised of 6± feet of soft sandy clay (A-6), underlain by 3± feet of very loose to medium dense sand (A-3).

Respectfully Submitted,

Joseph L. Stone, L.G.
Project Engineering Geologist

PROJECT: B-5141 COUNTY: Bertie

Volumes in Cubic Yards
DATE: 1/13/2014

COMPILED BY: KDA/IY

SHEET 1 OF 1 SHEETS

STATION	STATION	EXCAVATION					EMBANKMENT				BORROW	WASTE				
		TOTAL UNCLASS.	ROCK	UNDERCUT	UNSUIT. UNCLASS.	SUITABLE UNCLASS.	TOTAL	ROCK	EARTH	EMBANK. +25%		ROCK	SUITABLE	UNSUIT.	TOTAL	
SUMMARY 1																
PHASE 1																
-DET- 11+50.16	-DET- 15+44.06	17		241		17	3,849		3,849	4,811	4,794			241	241	
-DET- 16+34.06	-DET- 20+10.36	17		77		17	3,576		3,576	4,470	4,453			77	77	
SUBTOTAL		34		318		34	7,425		7,425	9,281	9,247			318	318	
SUMMARY 2																
PHASE 2																
-L- 11+50.00	15+12.00	22				22	1,032		1,032	1,290	1,268					
-L- 16+22.00	19+50.00	14				14	996		996	1,245	1,231					
SUBTOTAL		36				36	2,028		2,028	2,535	2,499					
SUMMARY 3																
PHASE 3 (DETOUR REMOVAL)																
-L- 11+50.00	15+40.25	3,156				3,156								3,156	3,156	
-L- 16+30.25	19+50.00	3,074				3,074								3,074	3,074	
SUBTOTAL		6,230				6,230								6,230	6,230	
TOTAL		6,300		318		6,300	9,453		9,453	11,816	11,746			6,230	318	6,548
SHOULDER MATERIAL (DETOUR)							164		164	205	205					
PROJECT TOTAL		6,300		318		6,300	9,617		9,617	12,021	11,951			6,230	318	6,548
ADDITIONAL ESTIMATED UNDERCUT EST. 5% TO REPLACE TOP SOIL ON BORROW PIT				350							598					
GRAND TOTAL		6,300		668		6,300	9,617		9,617	12,021	12,549			6,230	318	6,548
SAY		6,500		700							13,000					


NOTE: EARTHWORK QUANTITIES ARE CALCULATED BY THE ROADWAY DESIGN UNIT. THESE EARTHWORK QUANTITIES ARE BASED IN PART ON SUBSURFACE DATA PROVIDED BY THE GEOTECHNICAL ENGINEERING UNIT.

- EST. SHALLOW UNDERCUT = 100 CU. YD.
- EST. SELECT GRANULAR MATERIAL = 3150 CU. YD.
- EST. DDE = 161 CU. YDS.
- EST. CLASS IV SUBGRADE STABILIZATION = 200 TONS



8/17/99

REVISIONS

25-SEP-2012 14:26
L:\EPD\Greenv\Projects\Investigation\TIP\B5141_GEO_CADD\B5141_GEO_RDY_psh04.dgn
At: 016256444

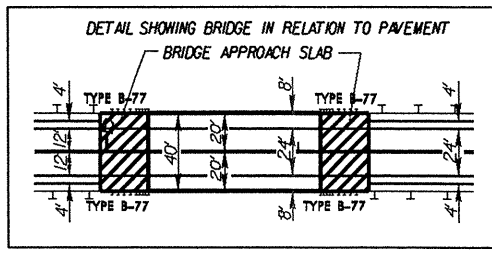

PROJECT REFERENCE NO. <i>B-5141</i>	SHEET NO. 4
RWY SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
INCOMPLETE PLANS DO NOT USE FOR R/W ACQUISITION PRELIMINARY PLANS DO NOT USE FOR CONSTRUCTION	

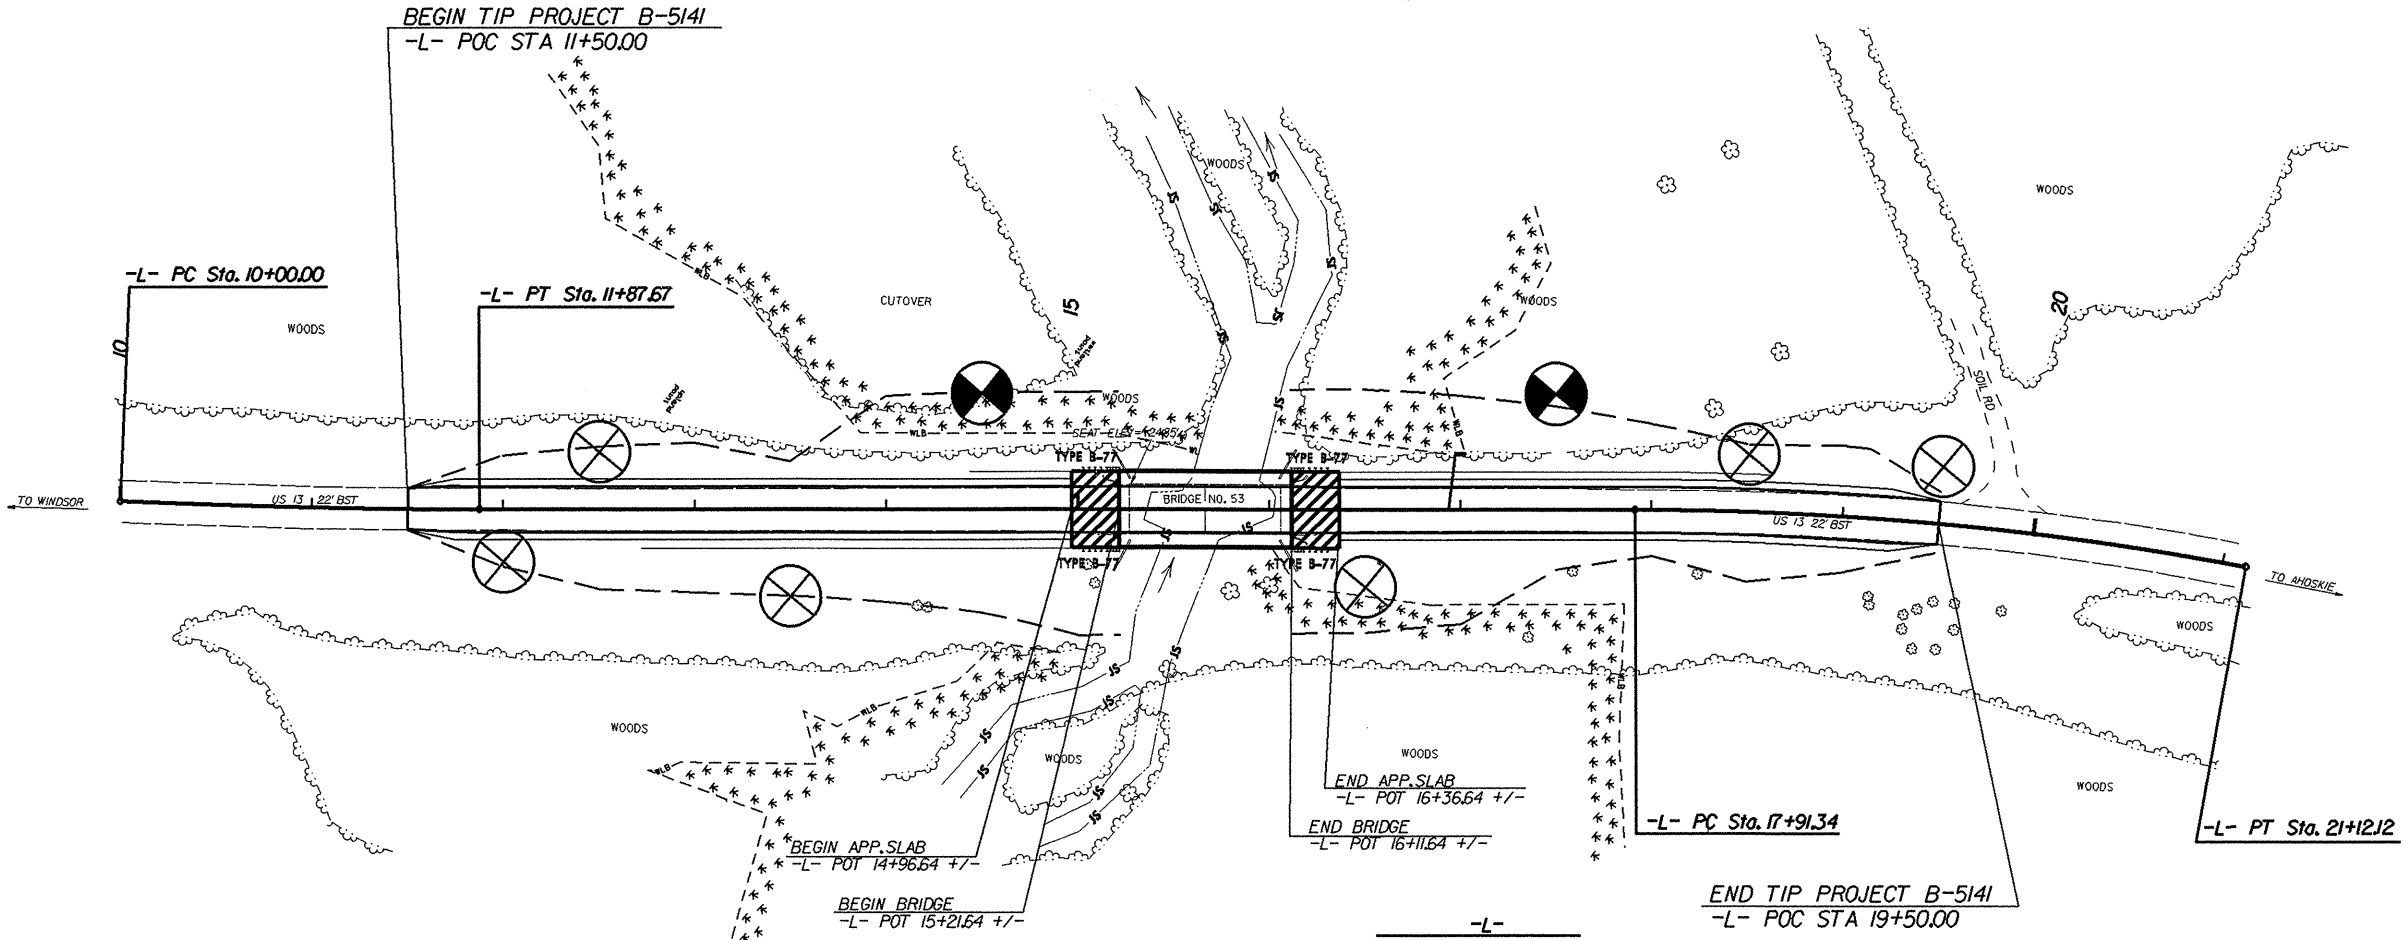


-L-
 PI Sta 19+52.18
 $\Delta = 10' 25' 30.9''$ (RT)
 $D = 3' 15' 00.0''$
 $L = 320.78'$
 $T = 160.83'$
 $R = 1,762.95'$
 $e = \text{SEE PLAN}$


8/17/99

REVISIONS

25-SEP-2009 11:53 \\j:\investigation\TIP\B5141.GEO_ROW\Y\CADD.GEOTECH\Site&Sub\B5141.GEO_ROW.psh05.dgn

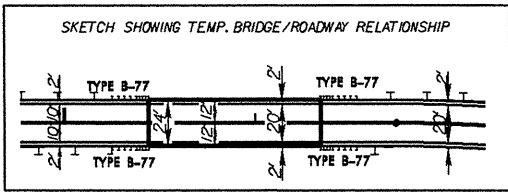


PROJECT REFERENCE NO. B-5141	SHEET NO. 5
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
INCOMPLETE PLANS DO NOT USE FOR ACQUISITION	
PRELIMINARY PLANS DO NOT USE FOR CONSTRUCTION	

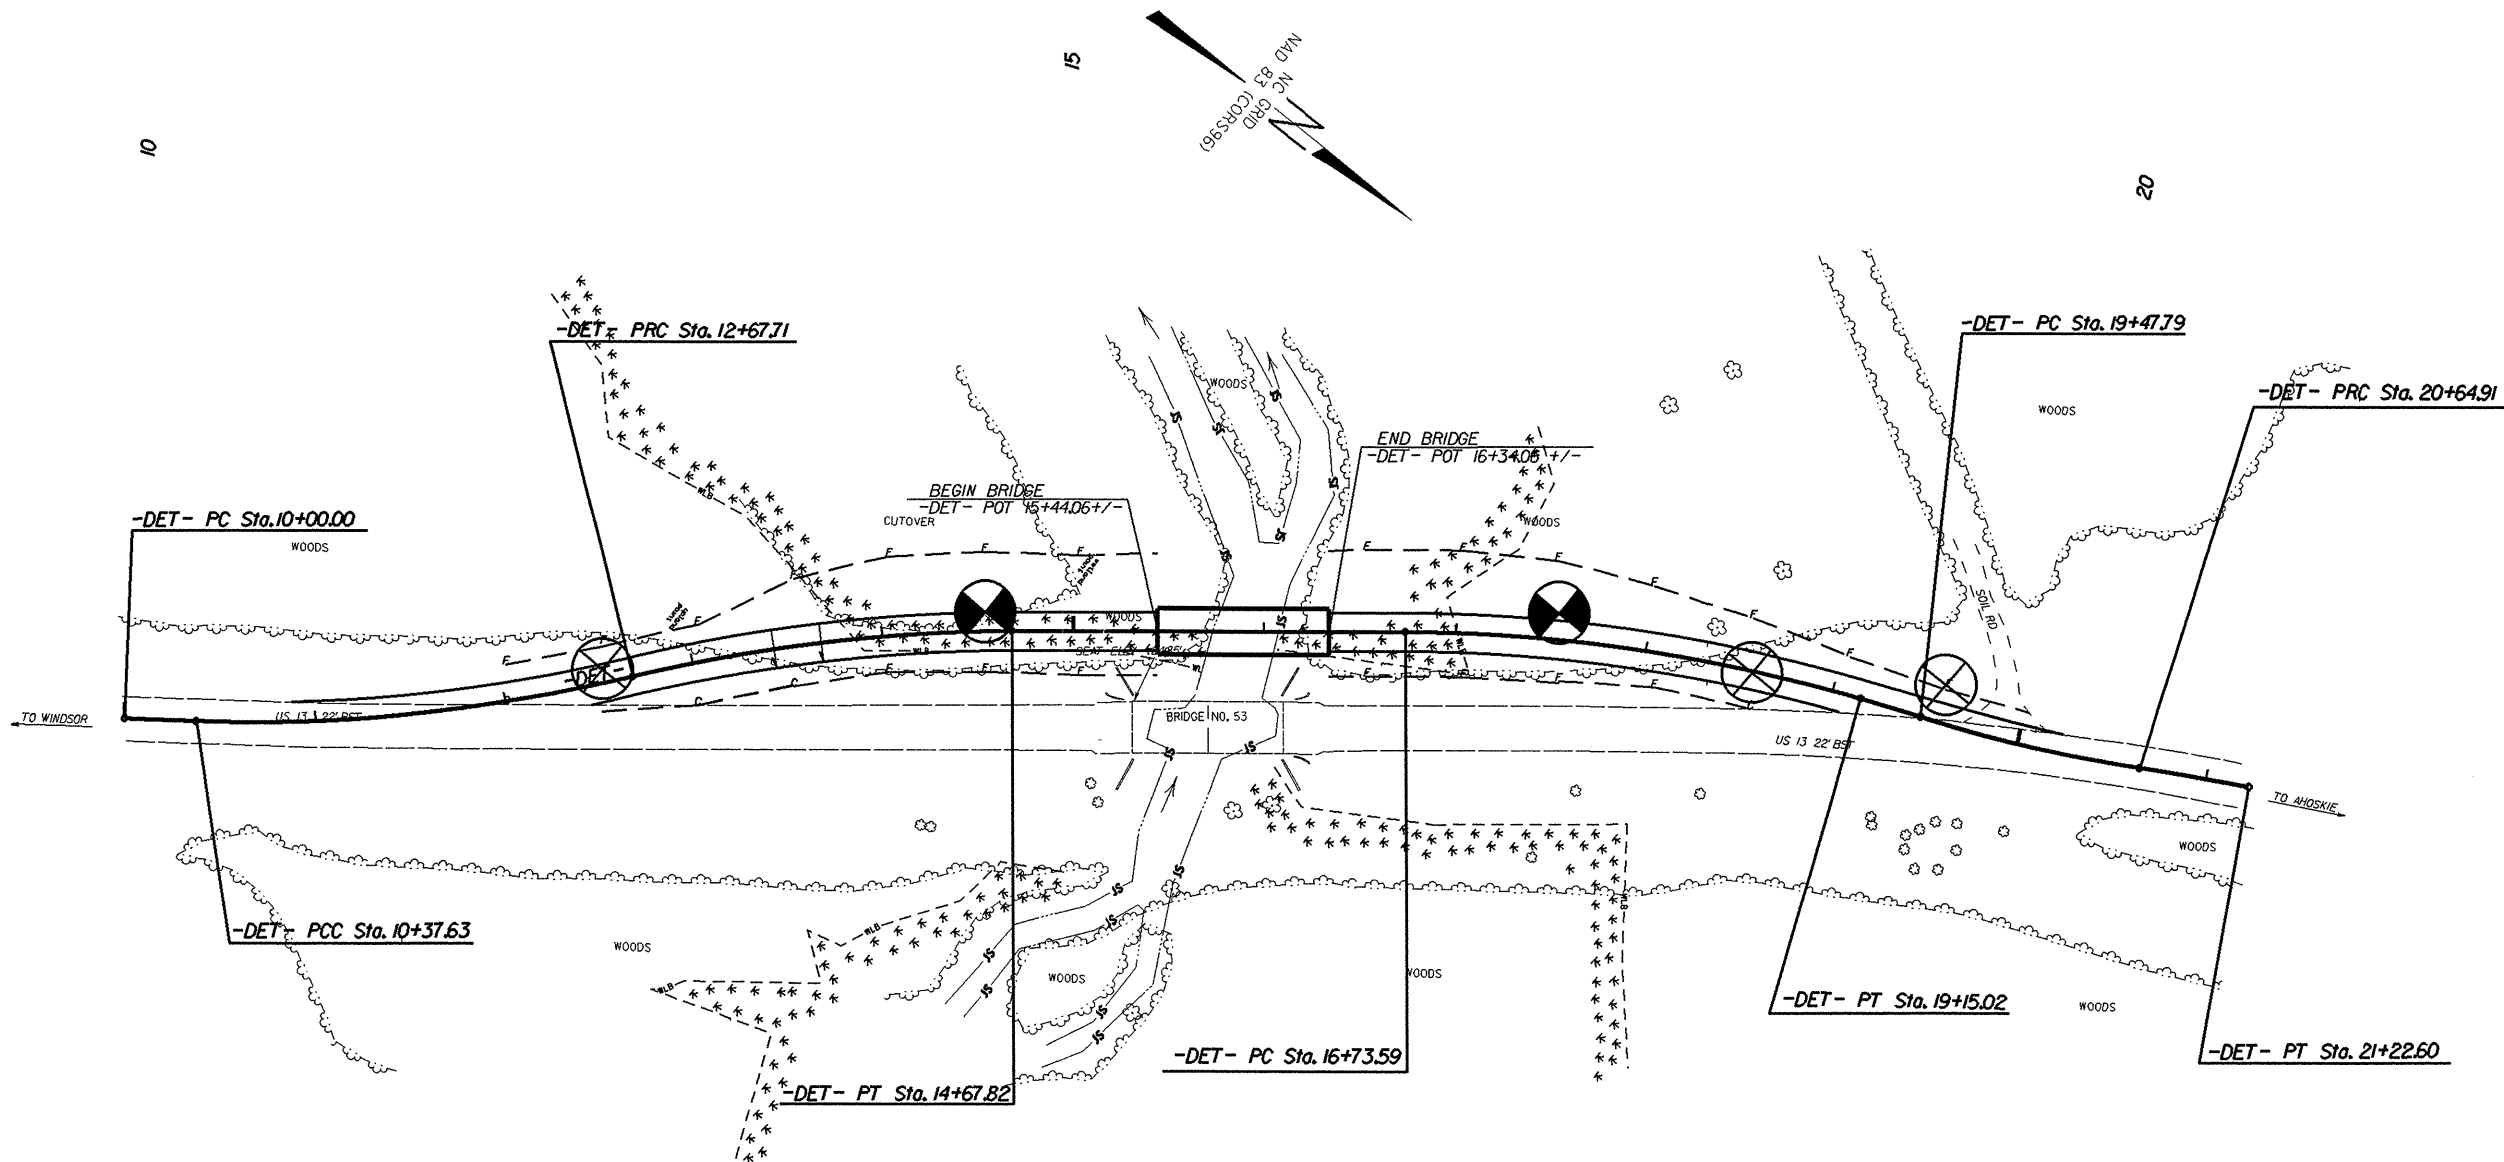

25-SEP-2009 11:53 \\j:\investigation\TIP\B5141.GEO_ROW\Y\CADD.GEOTECH\Site&Sub\B5141.GEO_ROW.psh05.dgn


SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.L.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C.SAND	F.SAND	SILT	CLAY	10	40	200		
S-4	27' RT	12+00	0.0-3.0	A-6(5)	30	14	12.7	35.4	23.6	28.3	100	99	58	-	-
S-3	45' RT	13+50	2.1-6.0	A-6(8)	34	19	18.4	28.7	24.6	28.3	100	97	60	-	-
SS-10	60' LT	14+50	4.0-5.5	A-6(7)	31	15	9.1	34.6	28.0	28.3	100	98	65	25.5	-
SS-11	60' LT	14+50	8.2-9.7	A-3(0)	23	NP	73.6	21.4	5.0	0.0	100	64	6	-	-
SS-12	60' LT	14+50	13.2-14.7	A-7-6(31)	55	32	7.0	21.6	45.0	32.4	100	99	88	-	-
SS-13	60' LT	17+50	0.0-1.5	A-6(12)	37	13	2.8	11.9	42.8	42.5	100	99	88	-	-
S-2	30' LT	18+50	0.0-2.5	A-6(6)	35	17	14.2	36.0	11.4	38.4	100	95	53	-	-
S-1	30' LT	19+50	0.0-3.8	A-6(13)	39	15	6.9	13.8	41.0	38.4	100	97	83	-	-

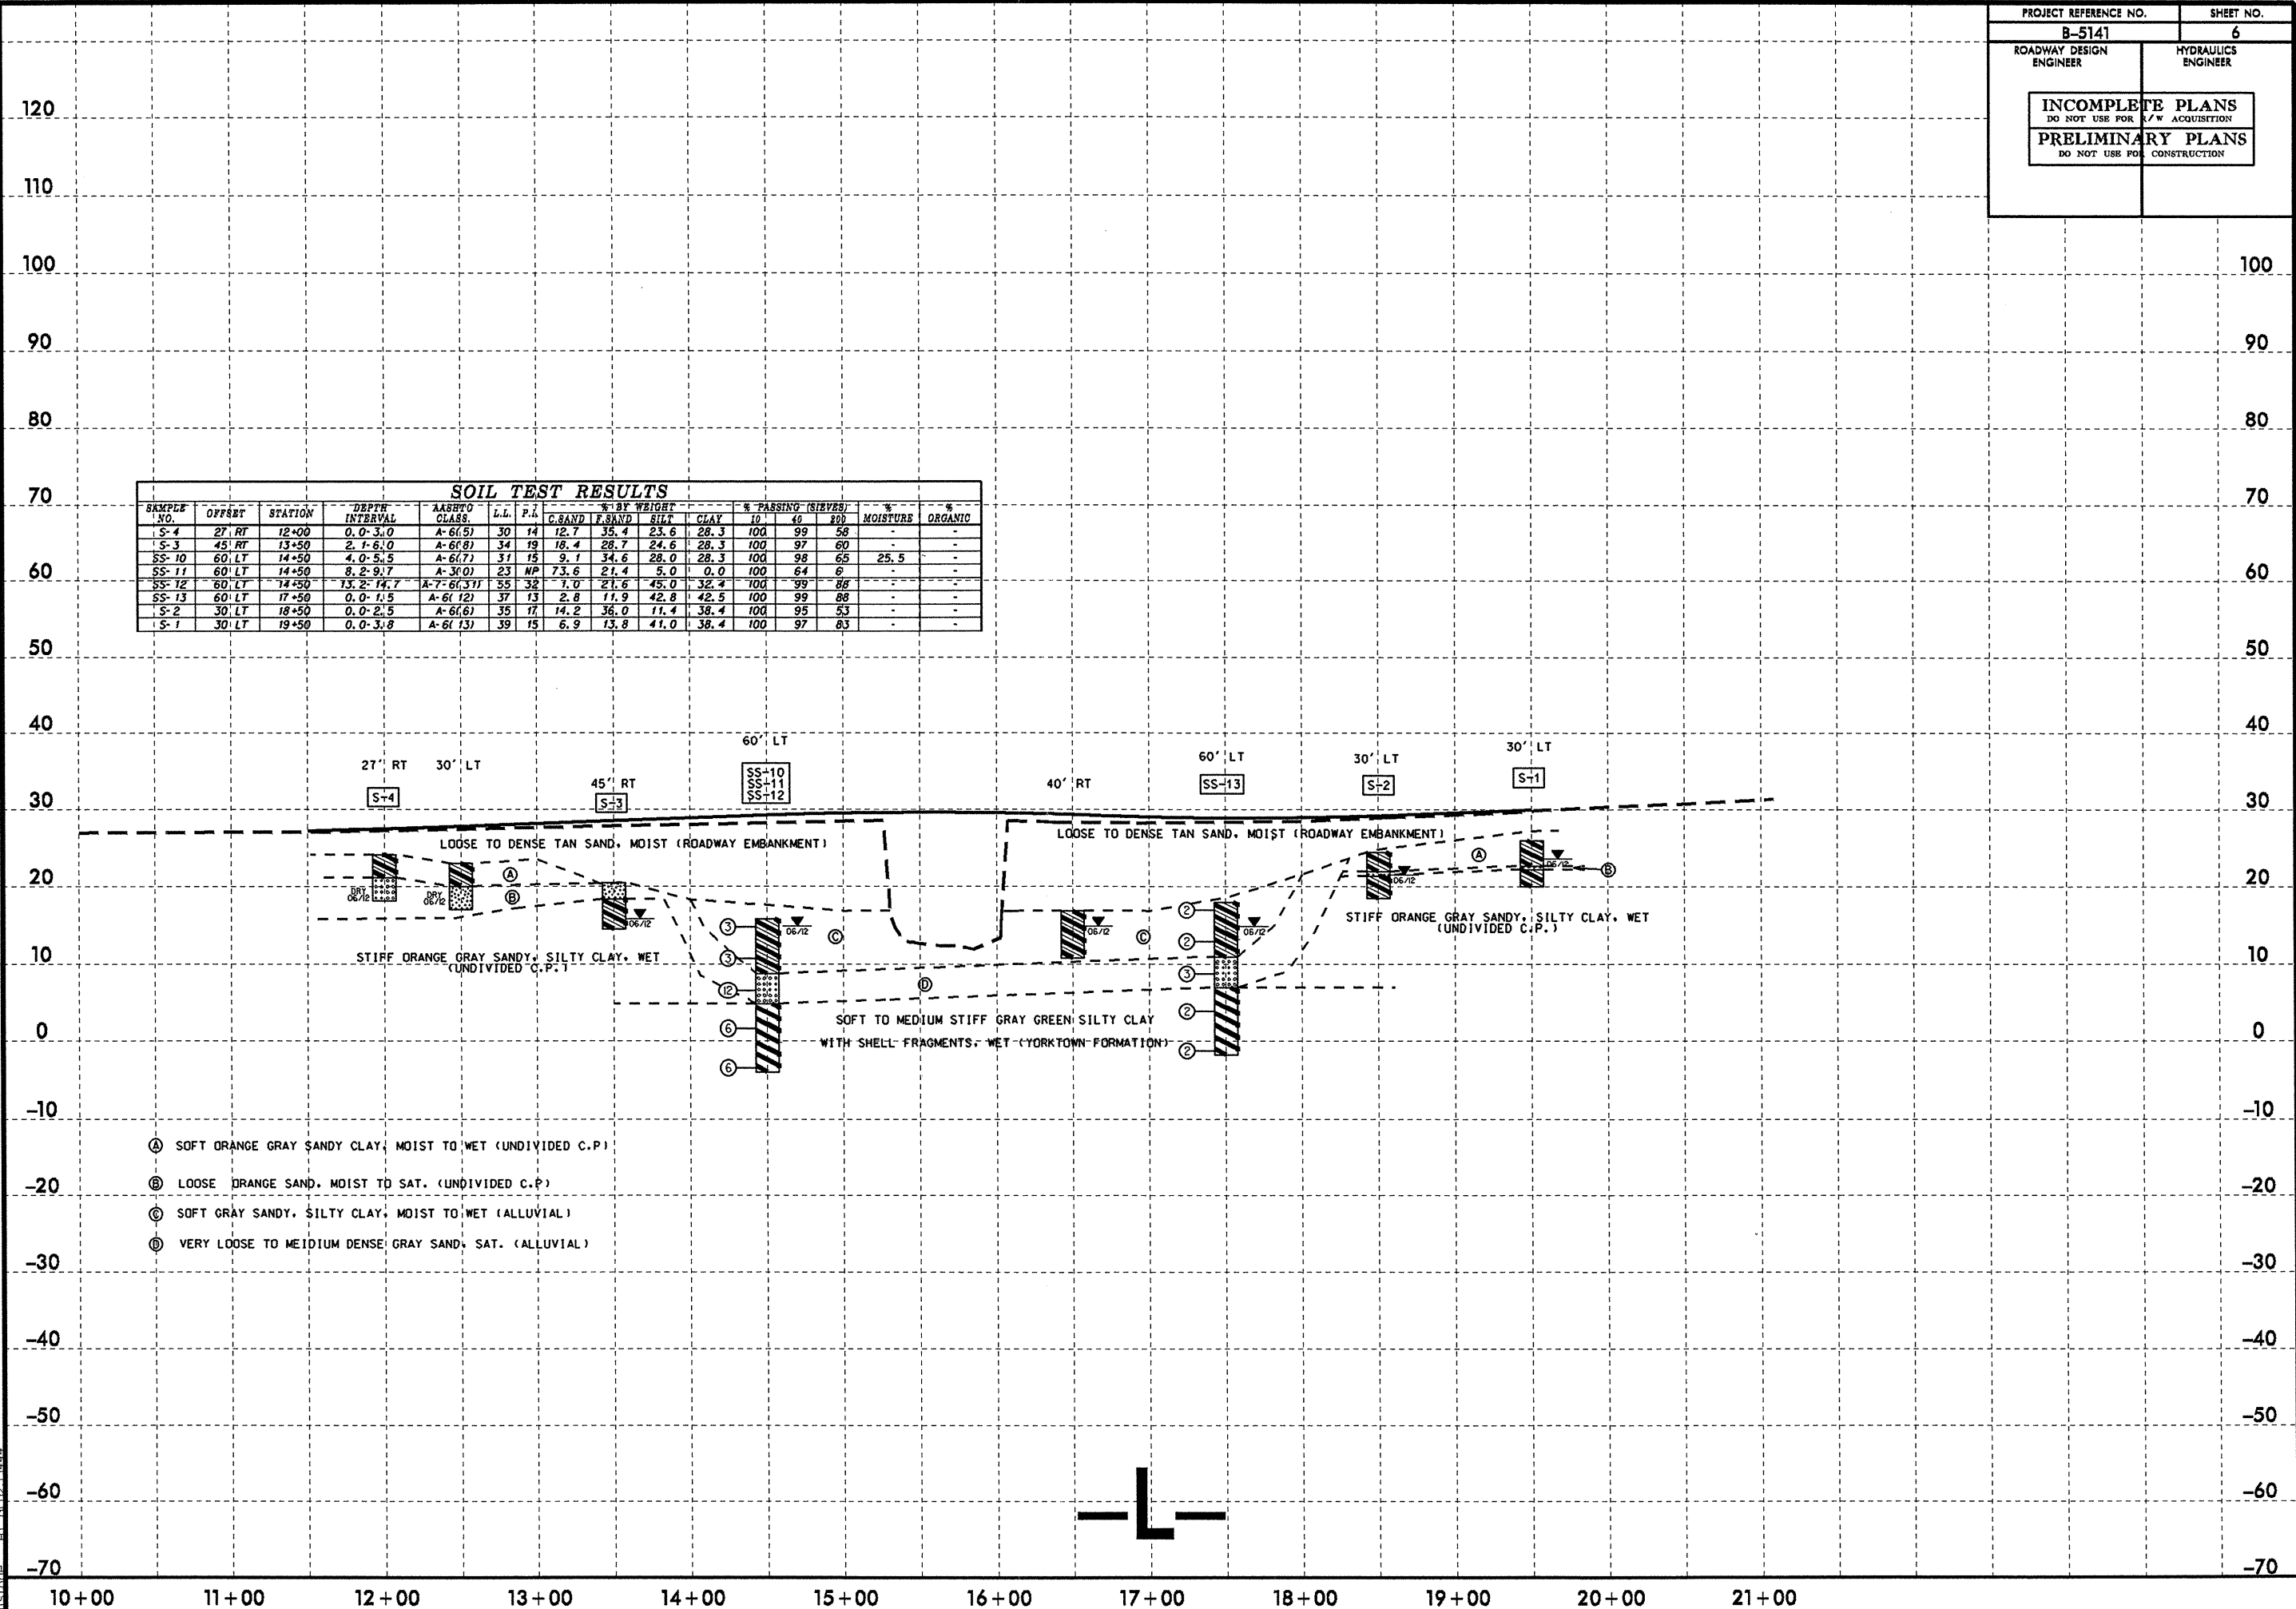

- Ⓐ SOFT ORANGE GRAY SANDY CLAY, MOIST TO WET (UNDIVIDED C.P.)
- Ⓑ LOOSE ORANGE SAND, MOIST TO SAT. (UNDIVIDED C.P.)
- Ⓒ SOFT GRAY SANDY, SILTY CLAY, MOIST TO WET (ALLUVIAL)
- Ⓓ VERY LOOSE TO MEDIUM DENSE, GRAY SAND, SAT. (ALLUVIAL)

25-SEP-2012 11:41
 C:\EFD\Greepville_Investigation\TIP\B5141.GEO_ROWY_CADD_GEO TECH.PlanProj\B5141.GEO_ROWY_L.PF11.dgn
 Listage AT 0.000000



SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C.SAND	F.SAND	SILT	CLAY	10	40	200		
SS-10	10 LT	14+54	4.0-5.5	A-6(7)	31	15	9.1	34.6	28.0	28.3	100	98	65	25.5	-
SS-11	10 LT	14+54	8.2-9.7	A-3(0)	23	NP	73.6	21.4	5.0	0.0	100	64	6	-	-
SS-12	10 LT	14+54	13.2-14.7	A-7-6(3)	55	32	1.0	21.6	45.0	32.4	100	99	88	-	-
SS-13	14 LT	17+53	0.0-1.5	A-6(12)	37	13	2.8	11.9	42.8	42.5	100	99	88	-	-
S-2	1 RT	18+56	0.0-2.5	A-6(6)	35	17	14.2	36.0	11.4	38.4	100	95	53	-	-
S-1	20 LT	19+56	0.0-3.8	A-6(13)	39	15	6.9	13.8	41.0	38.4	100	97	83	-	-

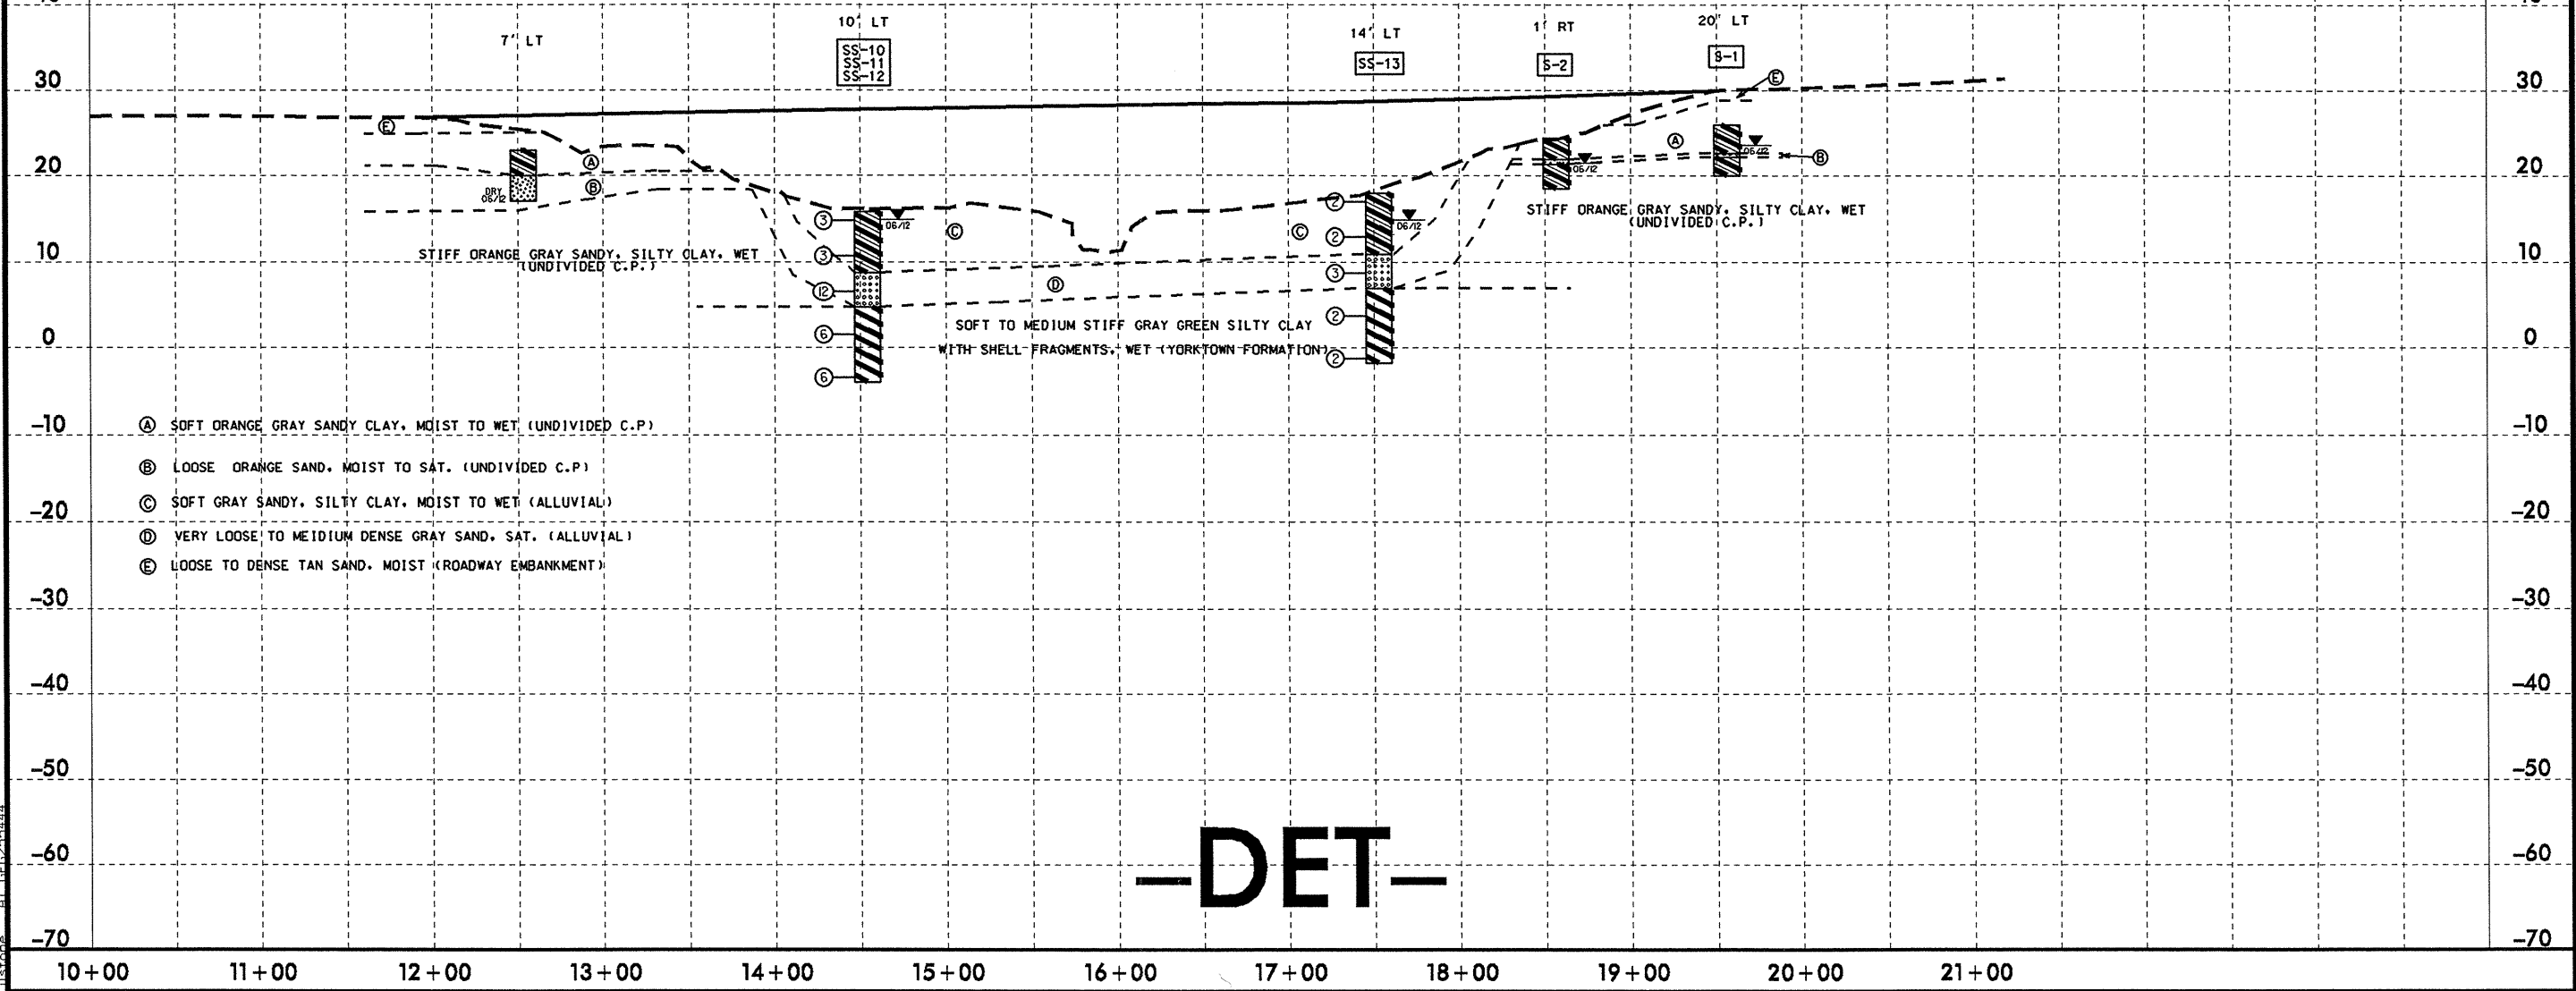

-DET-


5/14/99
 25-SEP-2012 11:41
 C:\p00\greenville_investigation\TIP\B5141.GEO.ROW\Y\CADD.GEOTECH\Plan\B5141.GEO.ROW.DET_PFI1.dgn
 11/20/2012 11:41 AM

8/23/99

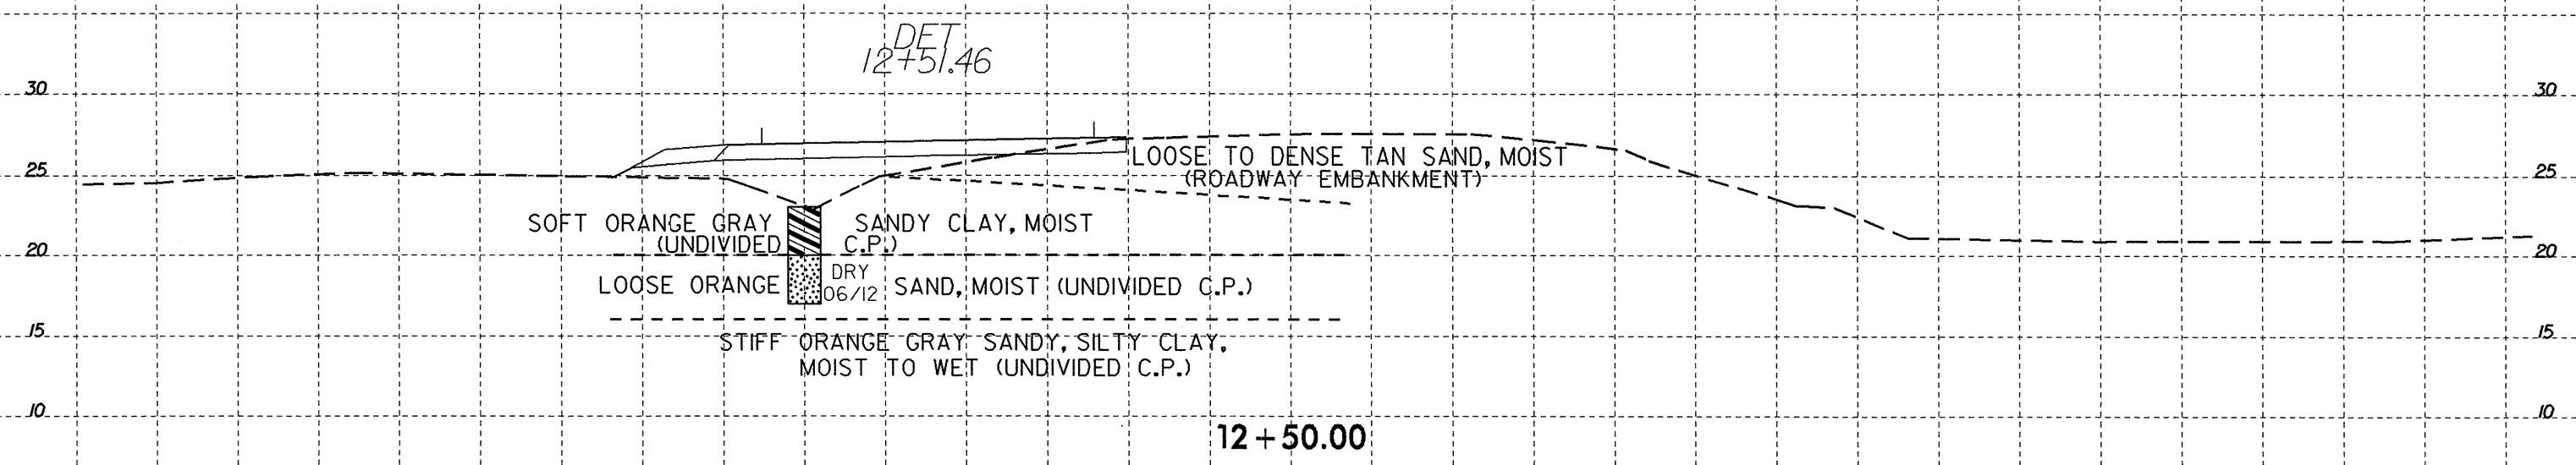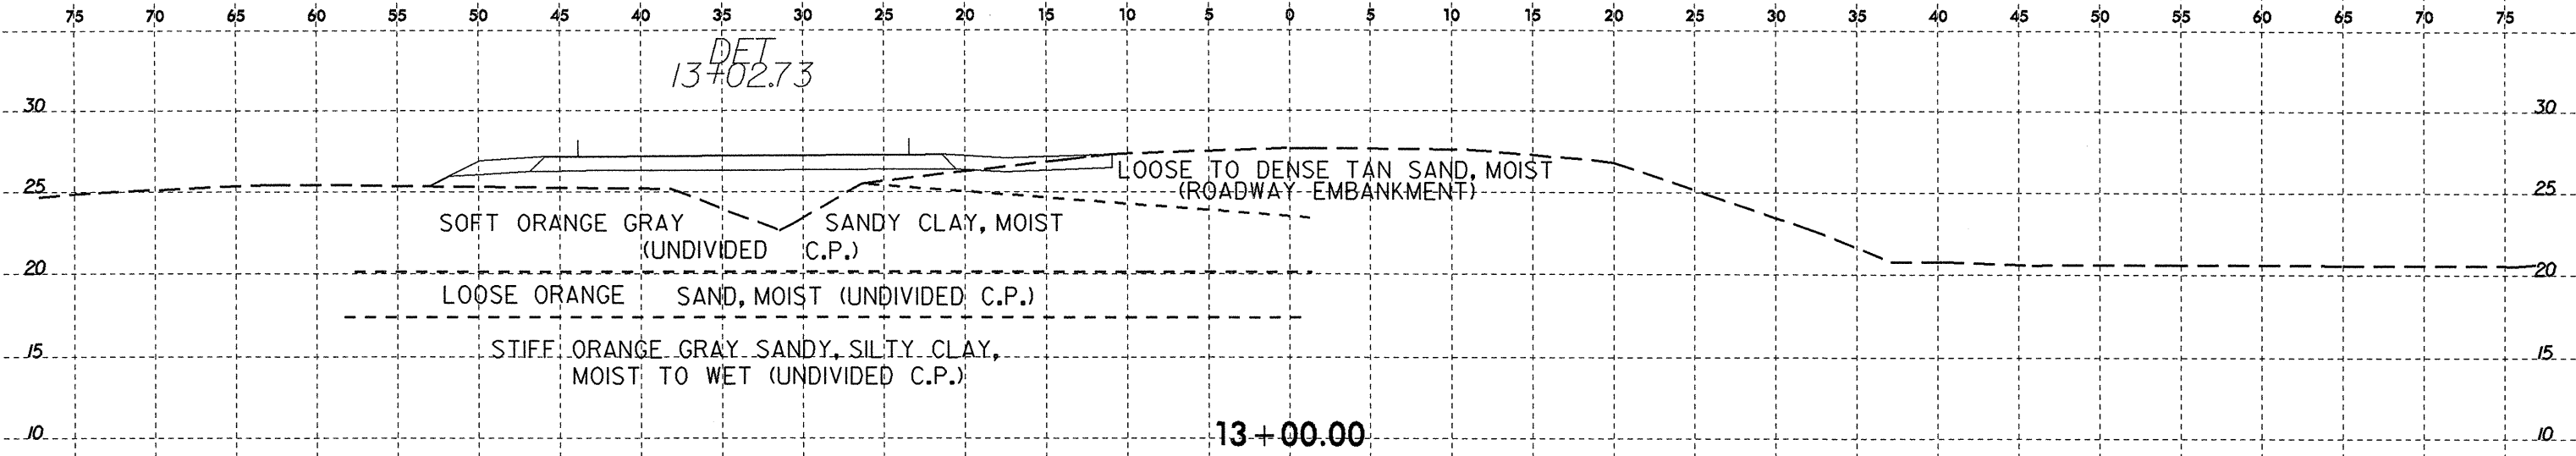


SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C.SAND	F.SAND	SILT	CLAY	10	40	200		
S-4	27 RT	12+00	0.0-3.0	A-6(5)	30	14	12.7	35.4	23.6	28.3	100	99	58	-	-

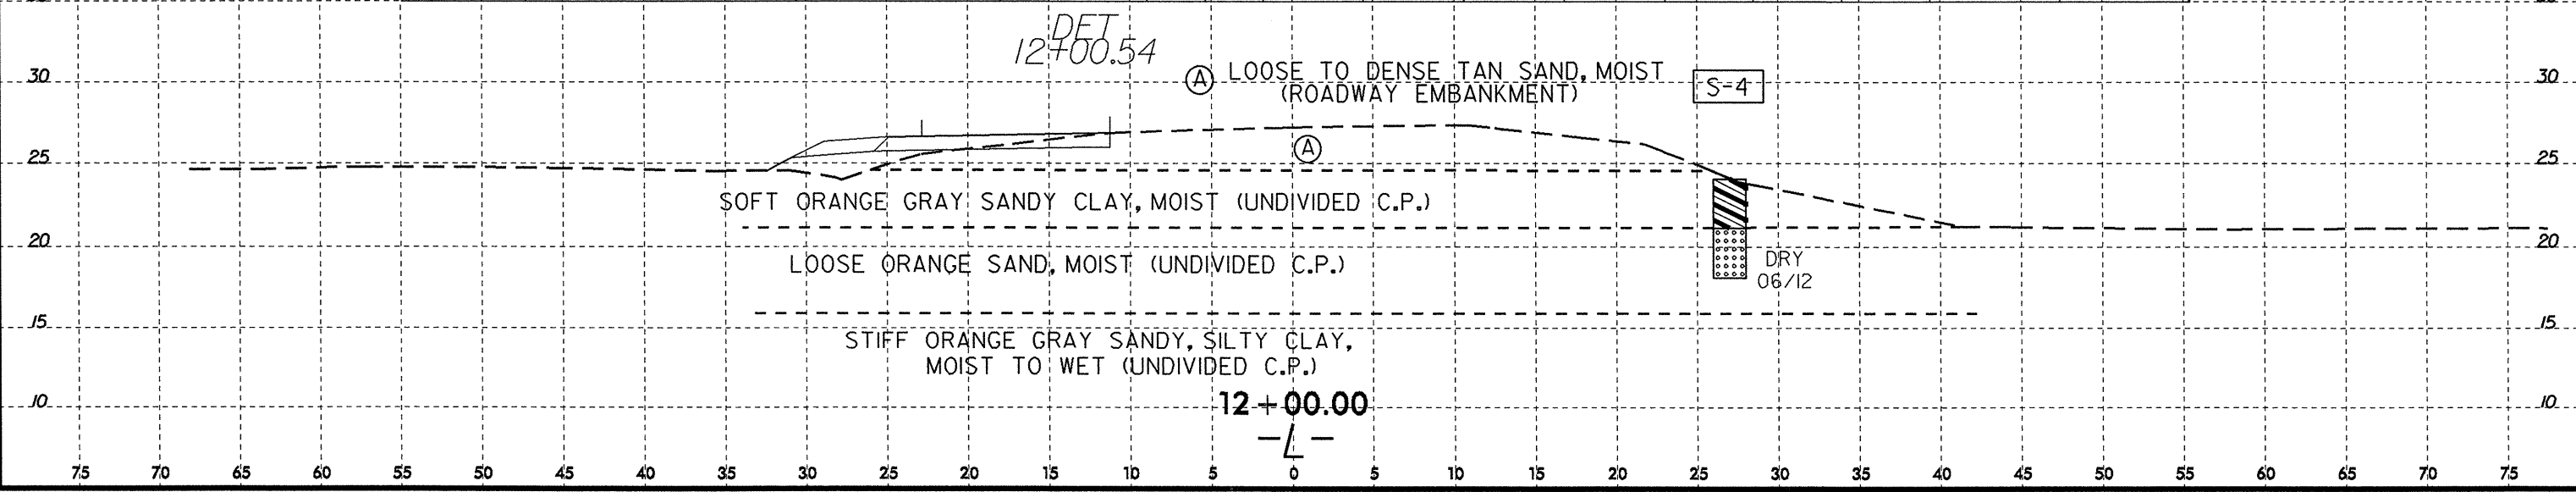


25-SEP-2012 11:51
 L:\ERON\Gravel\10-16-06\Investigation\TIP\B5141.GEO_RDWY\CADD.GEOTECH\B5141.GEO_RDWY_DET.L-12-13.xst.dgn
 L:\ERON\Gravel\10-16-06\Investigation\TIP\B5141.GEO_RDWY\CADD.GEOTECH\B5141.GEO_RDWY_DET.L-12-13.xst.dgn


SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C.SAND	F.SAND	SILT	CLAY	10	40	200		
S-1	30 LT	19+50	0.0-3.8	A-6(13)	39	15	6.9	13.8	41.0	38.4	100	97	83	-	-

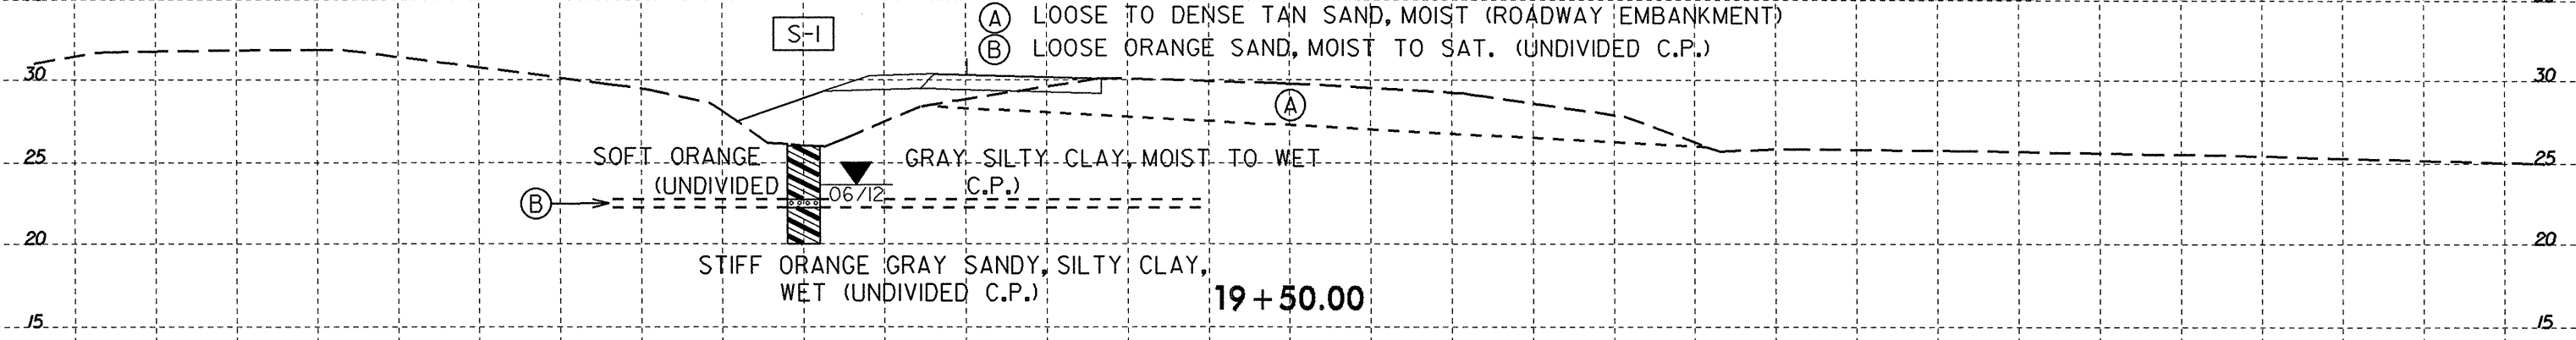

DET 19+08.10

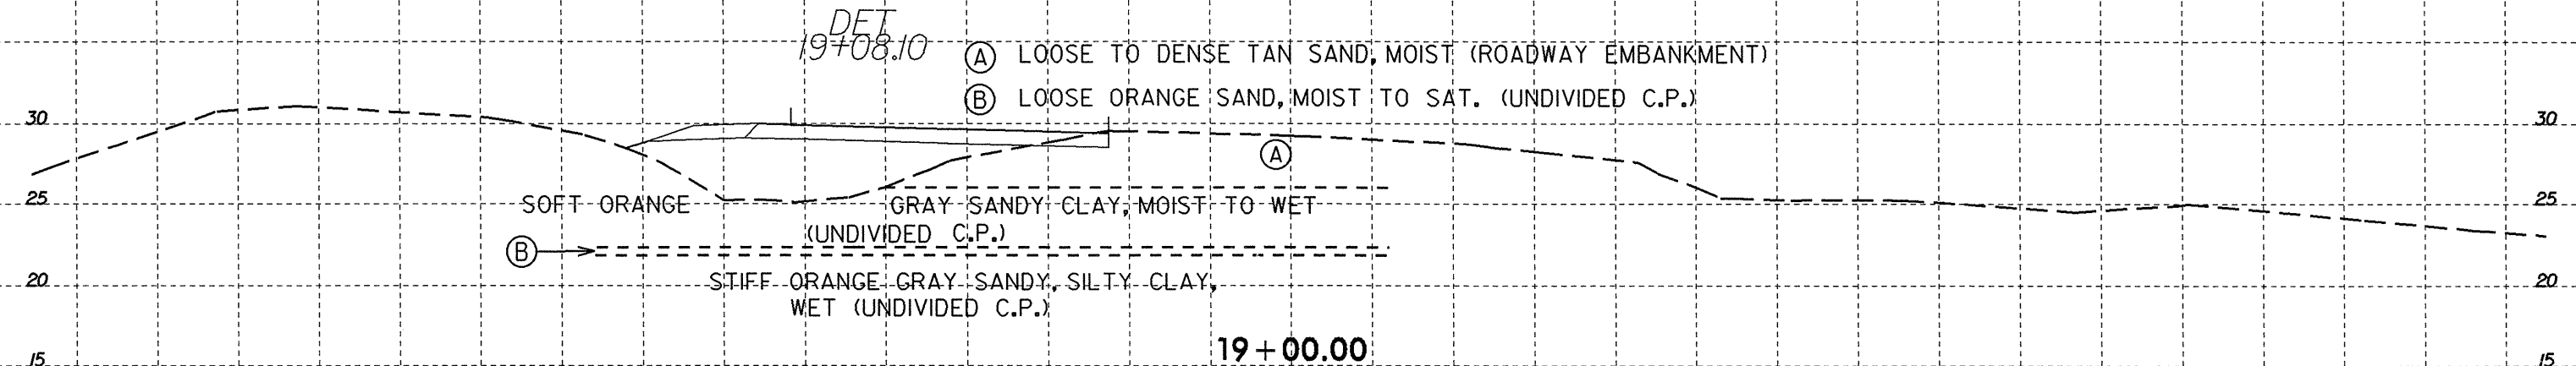

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C.SAND	F.SAND	SILT	CLAY	10	40	200		
S-2	30 LT	18+50	0.0-2.5	A-6(6)	35	17	14.2	36.0	11.4	38.4	100	95	53	-	-

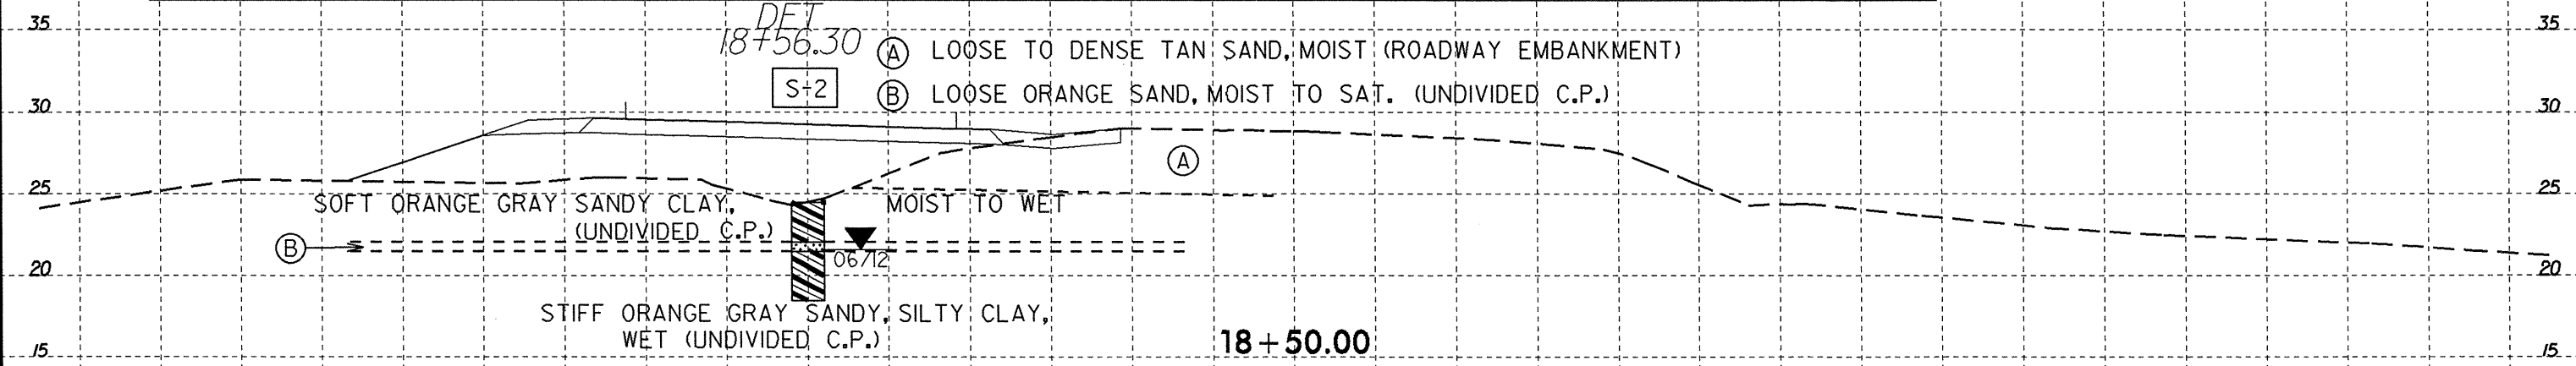

DET 18+56.30