


STANDARD RSS WITH SELECT MATERIAL THAT DOES NOT MEET ARTICLE 1019–2 OF THE STANDARD SPECIFICATIONS

**SEE TABLES ON SHEET 2 AND GEOGRID PLACEMENT DETAILS.

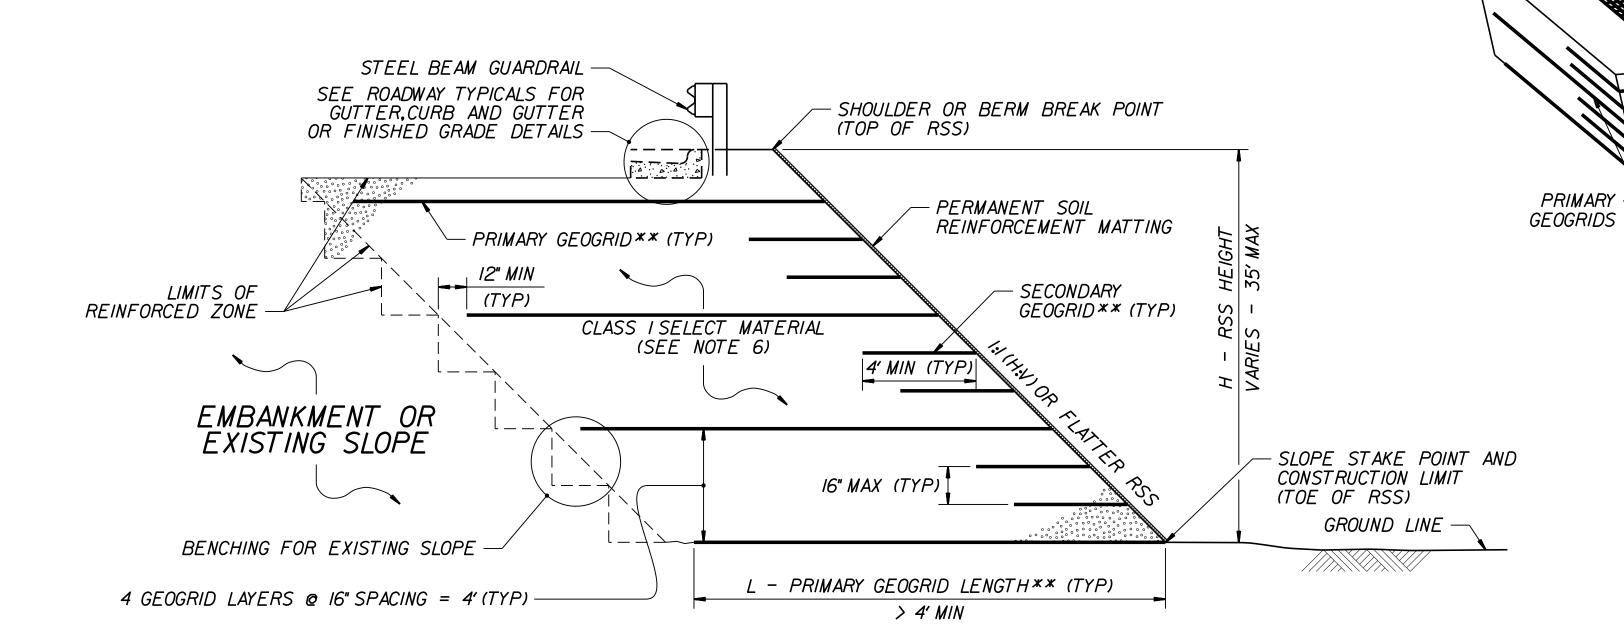

STANDARD RSS WITH SELECT MATERIAL THAT MEETS ARTICLE 1019–2 OF THE STANDARD SPECIFICATIONS **SEE TABLES ON SHEET 2 AND GEOGRID PLACEMENT DETAILS.

GEOGRID PLACEMENT DETAILS

(% COVERAGE = $\frac{W}{W+S}$ x 100 \geq 75%)

*SEE NOTES 8 AND 9 ON SHEET 2.

SECONDARY GEOGRID

S - PRIMARY GEOGRID

SPACING

3' MAX (TYP)

ROLL WIDTH


4' MIN (TYP)

TOP OF RSS

SECONDARY GEOGRIDS

SECONDARY GEOGRID

MACHINE DIRECTION (MD)

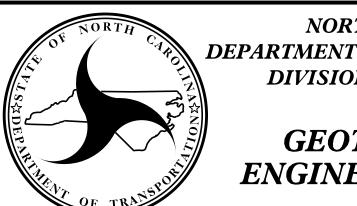

TOE OF RSS

∠ W − PRIMARY GEOGRID

ROLL WIDTH 4' MIN (TYP)

TOP OF RSS

PRIMARY GEOGRID CROSS-MACHINE DIRECTION (CD)*

NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

GEOTECHNICAL ENGINEERING UNIT STANDARD DETAIL NO. 1803.01

15. MIN

TOE OF RSS

STANDARD REINFORCED SOIL SLOPE (RSS) SHEET 1 OF 2

DATE: 11-19-13