

PAVEMENT MARKING PLAN

***PAVEMENT MARKING QUANTITIES**

WHITE EDGE LINE (POLYUREA)	11,683 LIN. FT.
10' YELLOW SKIP (POLYUREA)	1360 LIN. FT.
YELLOW SOLID LANE LINE (POLYUREA)	1830 LIN. FT.
YELLOW DOUBLE CENTER LINE (POLYUREA)	820 LIN. FT.

* QUANTITIES ARE SHOWN FOR INFORMATIONAL PURPOSES ONLY.

NOTES:

PAVEMENT MARKINGS SHALL BE IN COMPLIANCE WITH THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES" (MUTCD) (MILLENNIUM EDITION) AND NCDOT STD Nos. 1205.01 AND 1205.02, SEE SPECIAL PROVISIONS.

FOR RAISED REFLECTIVE PAVEMENT MARKERS SEE NCDOT STD Nos. 1250.01 AND 1251.01

ALL PAVEMENT MARKINGS SHALL BE 4" WIDE.


PROJECT NO. B-4858
BERTIE COUNTY
 STATION: 21+20.67 -L-

DECK REHAB. FOR BRIDGE NO. 7

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

PAVEMENT MARKINGS

28' CLEAR ROADWAY - 90° SKEW

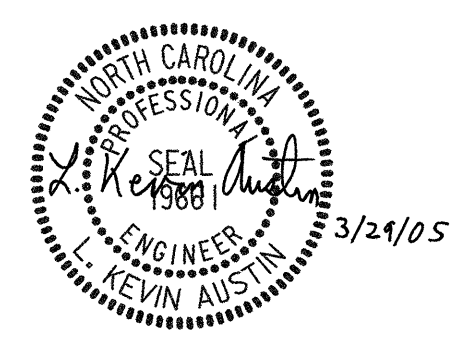

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			6
2			4			6

03/29/2005 10:50:00 AM G:\p\project\2002\29020 B 4858\Structure\4858_V4858_SD_PML.dgn

DRAWN BY : W. B. ALLEN DATE : 2/05
 CHECKED BY : L. K. AUSTIN DATE : 2/05