



BAGGED STONE AND PIPE SHALL BE PLACED IMMEDIATELY AFTER COMPLETION OF END BENT EXCAVATION. PIPE MAY BE EITHER CONCRETE, CORRUGATED STEEL, CORRUGATED ALUMINUM ALLOY, OR CORRUGATED PLASTIC. PERFORATED PIPE WILL NOT BE ALLOWED.


BAGGED STONE SHALL REMAIN IN PLACE UNTIL THE ENGINEER DIRECTS THAT IT BE REMOVED. THE CONTRACTOR SHALL REMOVE AND DISPOSE OF SILT ACCUMULATIONS AT BAGGED STONE WHEN SO DIRECTED BY THE ENGINEER. BAGS SHALL BE REMOVED AND REPLACED WHENEVER THE ENGINEER DETERMINES THAT THEY HAVE DETERIORATED AND LOST THEIR EFFECTIVENESS.

NO SEPARATE PAYMENT WILL BE MADE FOR THIS WORK AND THE ENTIRE COST OF THIS WORK SHALL BE INCLUDED IN THE UNIT CONTRACT PRICE FOR THE SEVERAL PAY ITEMS.

TEMPORARY DRAINAGE AT END BENT

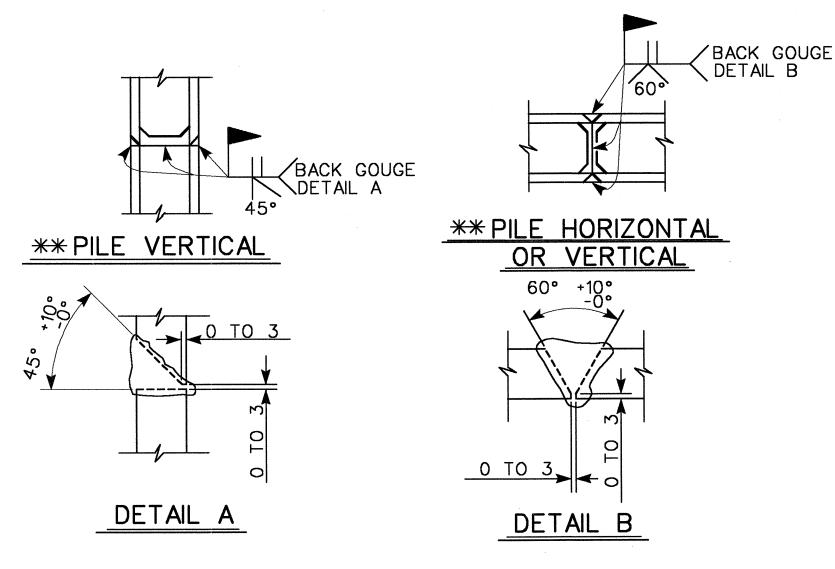

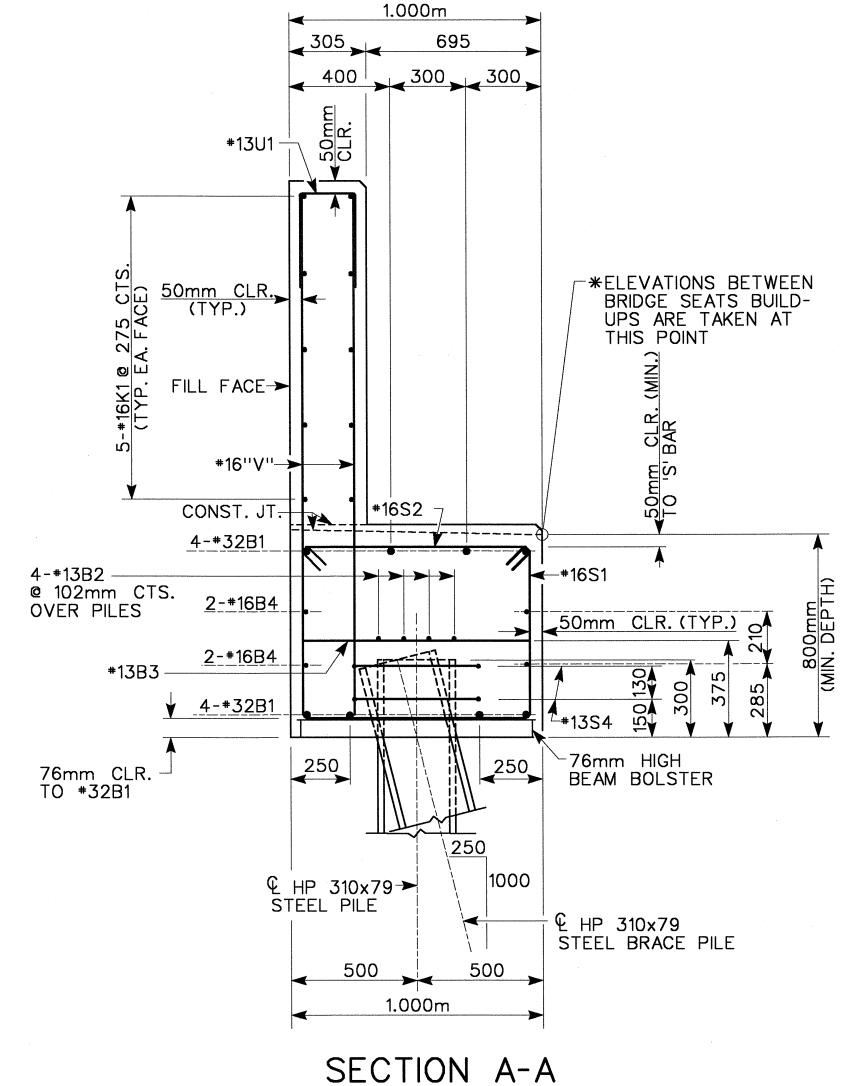

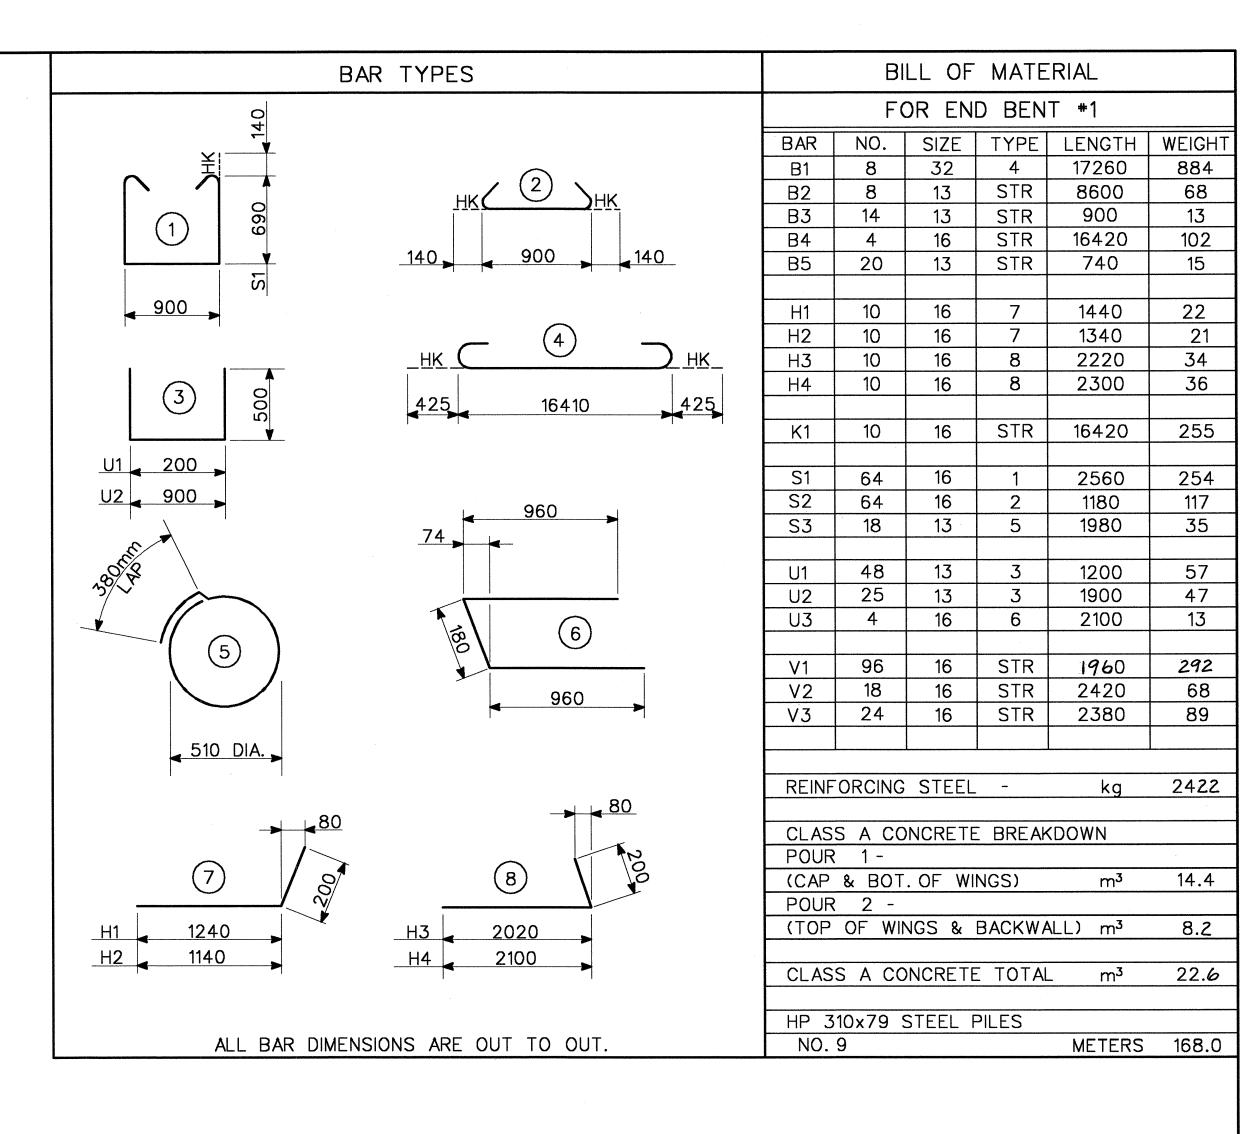

PILE SPLICE DETAILS ** POSITION OF PILE DURING WELDING

> PROJECT NO. R-2552B JOHNSTON COUNTY

STATION: 78+35.547 -L-12+97.374 -Y10-SHEET 3 of 3

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

END BENT #1

SUBSTRUCTURE (RIGHT LANE)

SHEET NO. **REVISIONS** 5-70 NO. DATE: DATE: TOTAL SHEETS

DRAWN BY : SD DATE : 6/03 CHECKED BY : JL DATE : 9/03