
FINAL PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
СЗ	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 2" IN DEPTH.
D1	PROP. APPROX. 4'' ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.OC, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2½" IN DEPTH OR GREATER THAN 4" IN DEPTH.
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5½" IN DEPTH.
R	PROP. 5" MONOLITHIC CONCRETE ISLAND (KEY-IN)
R1	PROPOSED 2'-6" CURB AND GUTTER
R2	EXISTING 2'-6" CURB AND GUTTER TO BE RETAINED
S	PROPOSED 4" CONCRETE SIDEWALK WITH WELDED WIRE MESH
Т	EARTH MATERIAL.
U	EXISTING PAVEMENT.

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

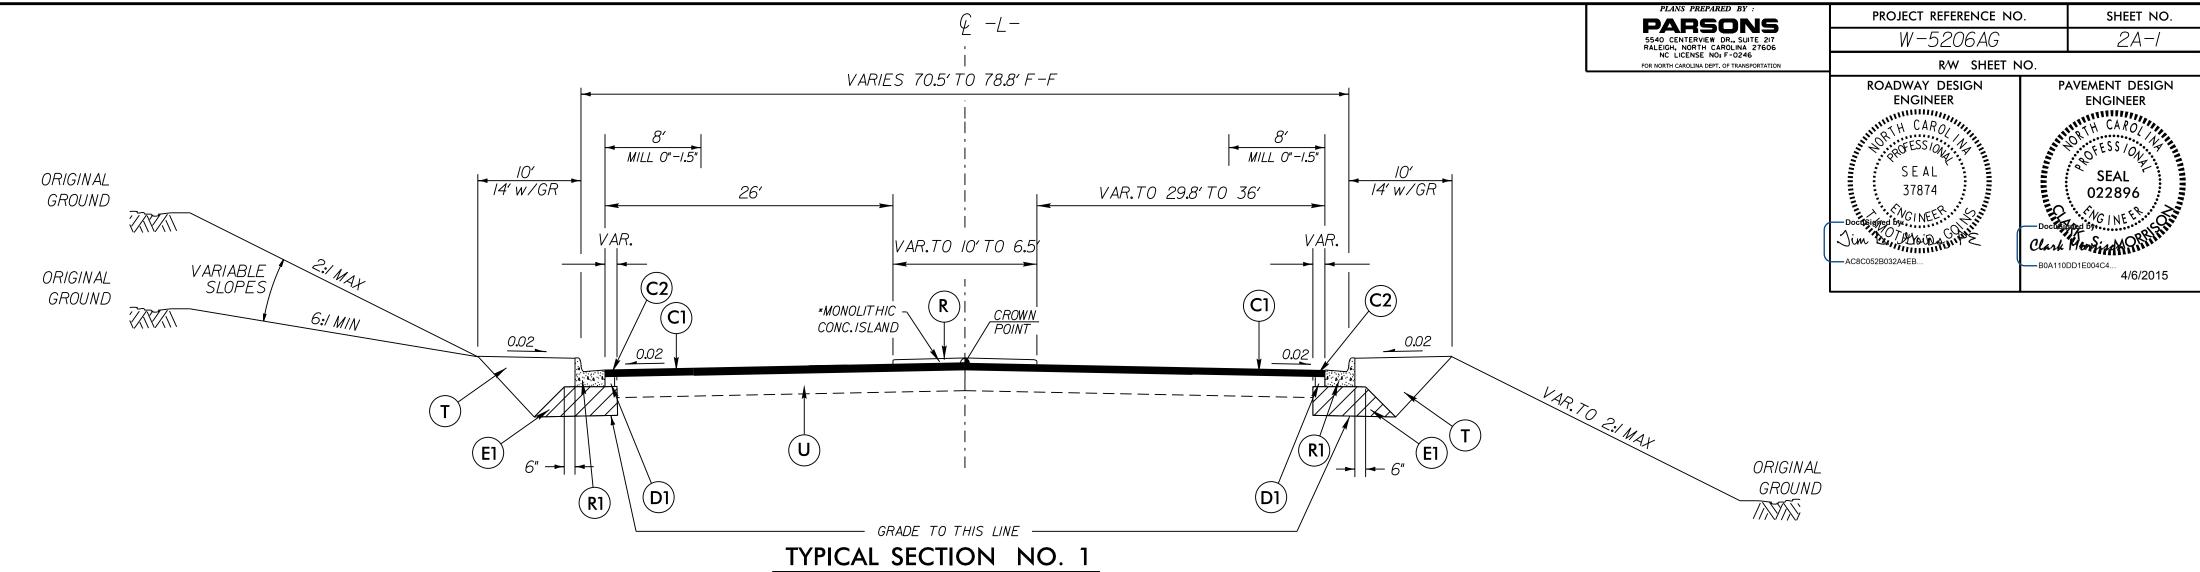

## USE TYPICAL SECTION NO. 1


-L- STA. 23+12.00 TO STA. 24+12.00 -L- STA. 29+00.00 TO STA. 31+00.00 \*NOTE: SEE PLAN VIEW FOR EXACT LOCATION OF MONOLITHIC ISLAND

\*\*NOTE: OVERLAY EXISTING PAVEMENT WITH

1.5" S9.5C THROUGHOUT LIMITS OF

PERMANENT MARKINGS SHOWN IN PMP PLAN.

(-L- STA.16+40---SEE PMP-03)

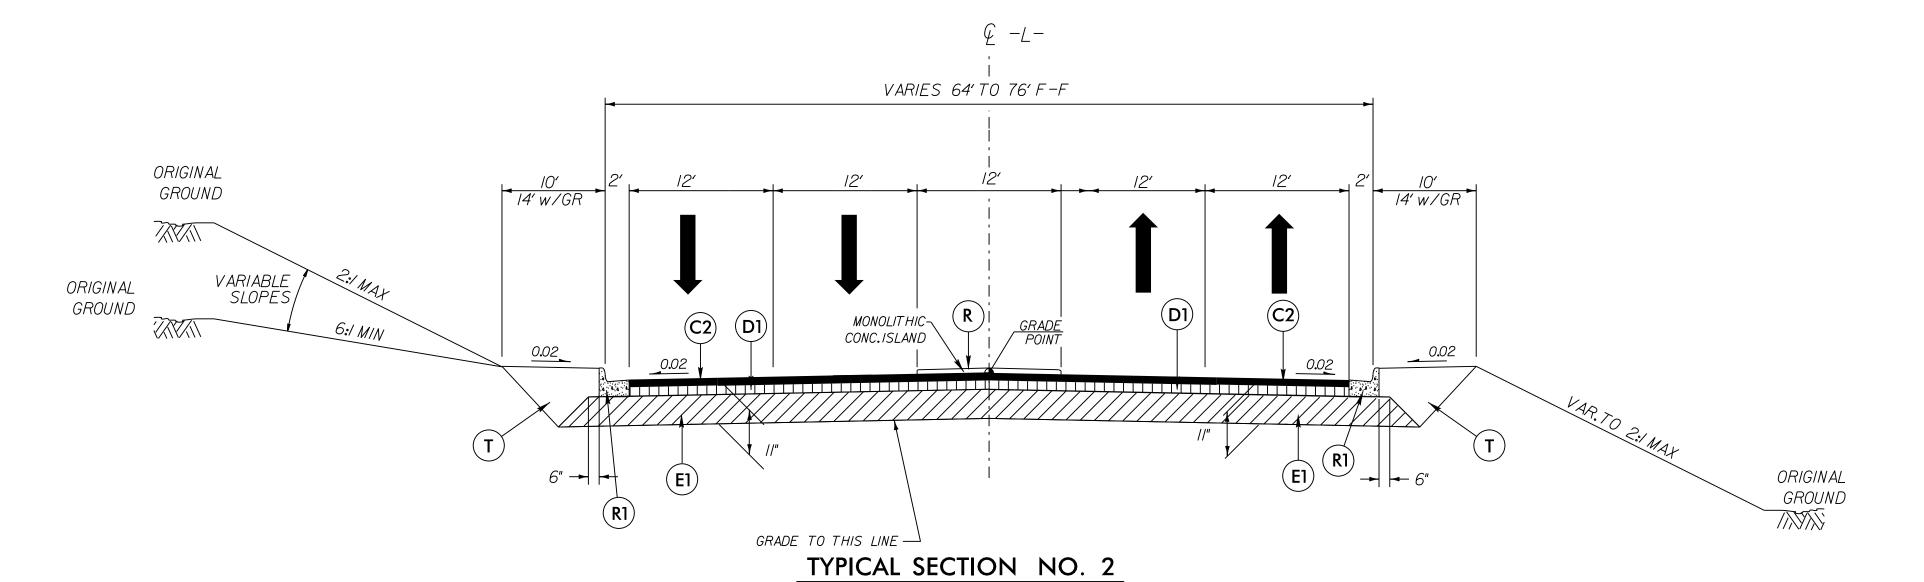

## USE TYPICAL SECTION NO. 2

-L- STA. 24+12.00 TO STA. 29+00.00