


SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PL. I.	% BY WEIGHT				% PASSING SIEVES		
							C. SAND	F. SAND	SILT	CLAY	10	40	200
S-246	0	131+80	2.10-2.50	A-2-4(0)	15	NP	44.9	42.2	3.7	9.1	97	72	18
SS-352	20	132+40	0.89-1.34	A-2-4(0)	17	3	24.6	46.3	11.0	18.1	97	83	34
SS-353	20	132+40	2.41-2.86	A-6(12)	39	20	0.8	56.6	12.4	30.2	100	99	69
S-350	0	133+00	1.60-1.80	A-6(4)	29	14	15.3	51.2	13.4	20.1	98	88	53
S-351	0	133+00	3.80-4.20	A-4(1)	31	10	13.7	54.0	12.2	20.1	99	90	43
S-340	0	133+60	0.50-2.00	A-7-5(9)	54	22	18.3	35.4	20.0	26.2	100	94	52
SS-348	0	133+60	0.96-1.41	A-7-5(34)	94	52	7.5	18.3	23.9	50.4	82	79	64
SS-349	0	133+60	2.48-2.93	A-7-5(34)	79	30	4.4	12.7	32.5	50.4	100	98	86
SS-344	0	134+00	2.63-3.08	A-7-6(21)	66	39	9.7	24.0	30.1	36.3	80	76	60
SS-345	0	134+00	4.15-4.60	A-7-5(16)	65	25	9.5	33.6	32.7	24.2	95	90	63
S-64	0	134+80	0.50-1.00	A-4(0)	14	NP	30.8	39.2	9.9	20.1	95	76	36
S-65	0	134+80	2.00-2.50	A-6(8)	33	17	1.8	58.9	7.1	32.2	100	99	61

- (A) COASTAL PLAIN, BROWN, STIFF, WET, SANDY SILT
- (B) ALLUVIAL, GRAY, LOOSE TO MEDIUM-DENSE, SATURATED, SILTY COARSE SAND

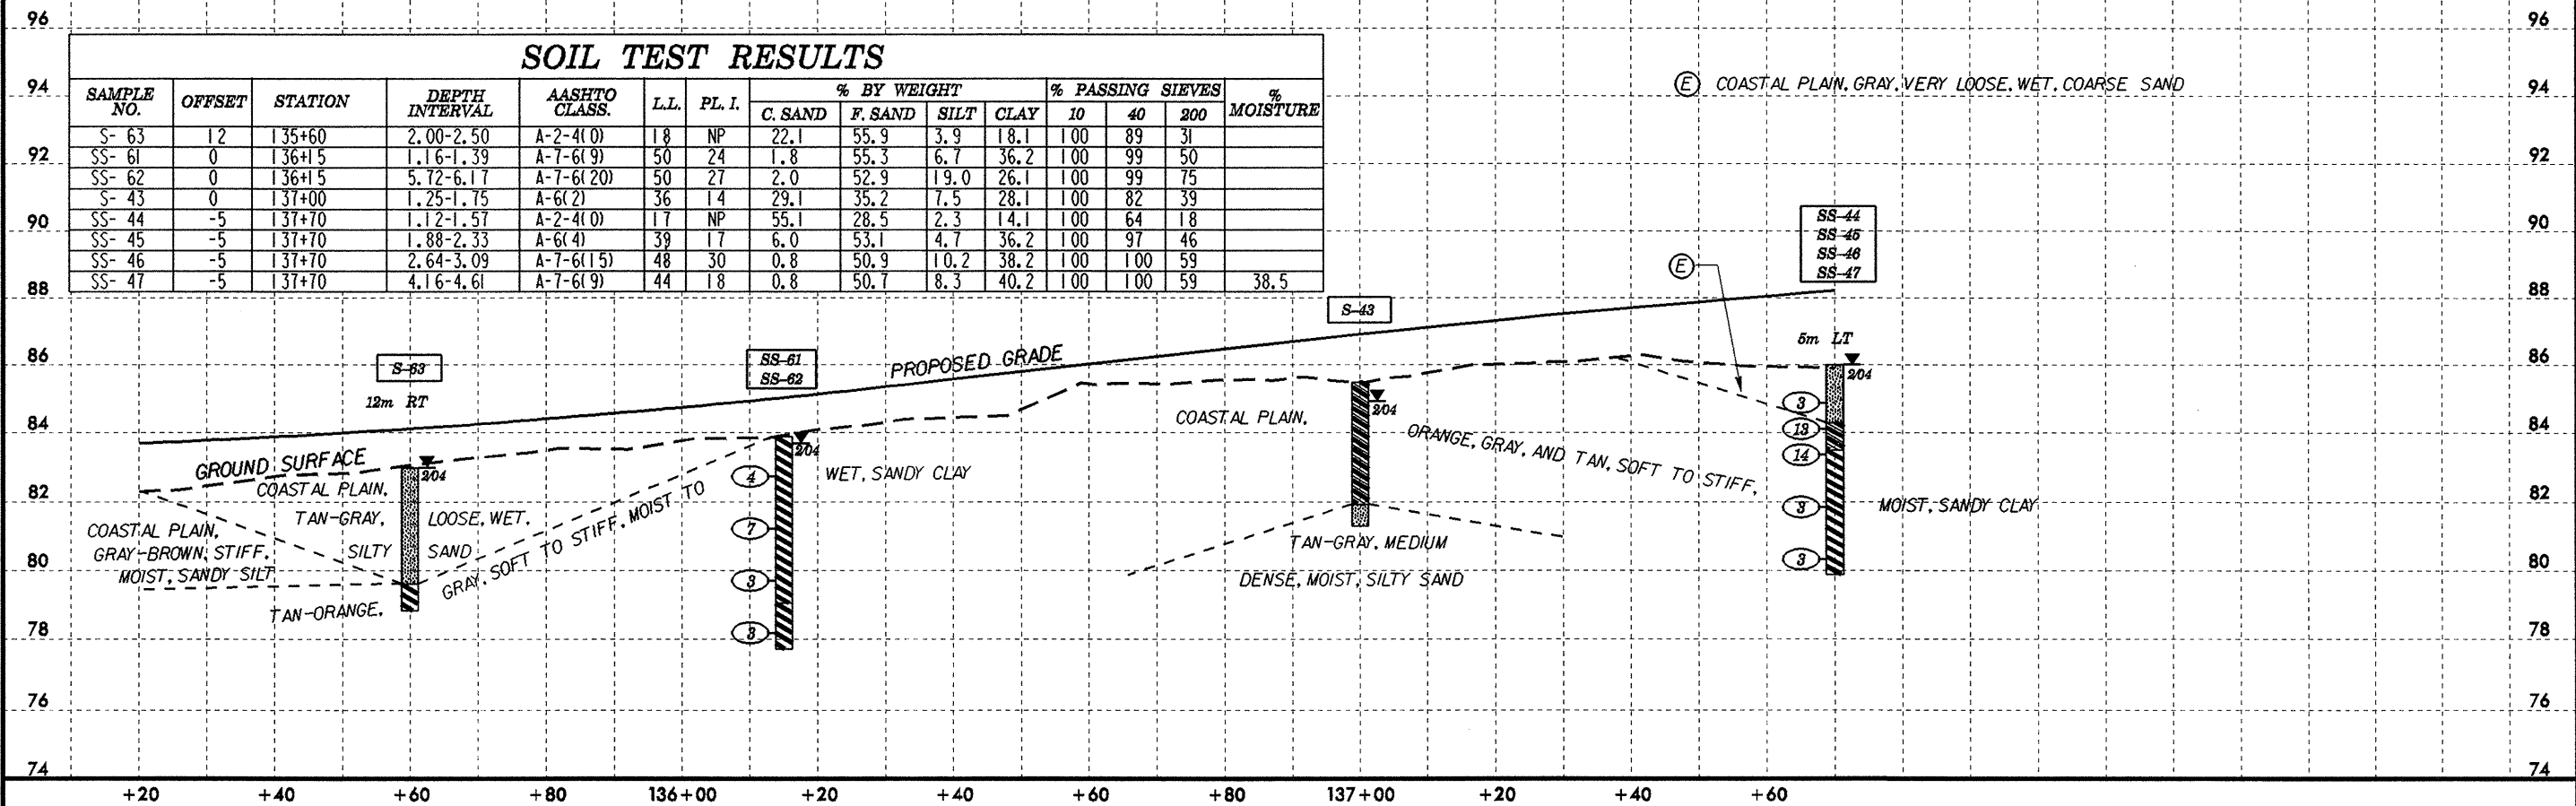

SOIL TEST RESULTS

SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	LL	PL. I.	% BY WEIGHT				% PASSING SIEVES			% MOISTURE
							C. SAND	F. SAND	SILT	CLAY	10	40	200	
S-63	12	135+60	2.00-2.50	A-2-4(0)	18	NP	22.1	55.9	3.9	18.1	100	89	31	
SS-61	0	136+15	1.16-1.39	A-7-6(9)	50	24	1.8	55.3	6.7	36.2	100	99	50	
SS-62	0	136+15	5.72-6.17	A-7-6(20)	50	27	2.0	52.9	19.0	26.1	100	99	75	
S-43	0	137+00	1.25-1.75	A-6(2)	36	14	29.1	35.2	7.5	28.1	100	82	39	
SS-44	-5	137+70	1.12-1.57	A-2-4(0)	17	NP	55.1	28.5	2.3	14.1	100	64	18	
SS-45	-5	137+70	1.88-2.33	A-6(4)	39	17	6.0	53.1	4.7	36.2	100	97	46	
SS-46	-5	137+70	2.64-3.09	A-7-6(15)	48	30	0.8	50.9	10.2	38.2	100	100	59	
SS-47	-5	137+70	4.16-4.61	A-7-6(9)	44	18	0.8	50.7	8.3	40.2	100	100	59	

- (E) COASTAL PLAIN, GRAY, VERY LOOSE, WET, COARSE SAND