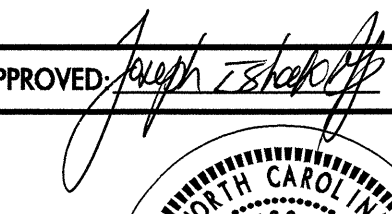
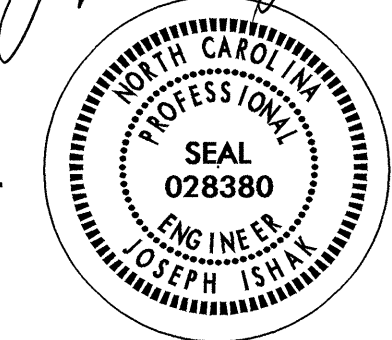



FINAL PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY BREAKDOWN		TOTAL QUANTITY
FINAL PAVEMENT MARKINGS				
		THERMOPLASTIC (4", 90 MILS)		
TA	WHITE EDGELINE	24000	LF	
			TOTAL	24000 LF
		THERMOPLASTIC (4", 120 MILS)		
TD	2 FT. WHITE MINISKIP	65	LF	
TE	WHITE SOLID LANE LINE	350	LF	
TF	10 FT. YELLOW SKIP	300	LF	
TH	YELLOW SINGLE CENTER	1200	LF	
TI	YELLOW DOUBLE CENTER	24000	LF	
			TOTAL	25915 LF
		THERMOPLASTIC (8", 90 MILS)		
TT	YELLOW DIAGONAL	100	LF	
			TOTAL	100 LF
		THERMOPLASTIC (24", 120 MILS)		
T2	WHITE STOPBAR	120	LF	
			TOTAL	120 LF
THERMOPLASTIC PAVEMENT MARKING SYMBOLS (90 MILS)				
UA	LEFT TURN ARROW	6	EA	
UB	RIGHT TURN ARROW	2	EA	
UC	STRAIGHT ARROW	2	EA	
UI	ALPHANUMERIC CHARACTER	12	EA	
			TOTAL	22 EA
MARKERS				
PERMANENT RAISED PAVEMENT MARKERS				
MA	YELLOW & YELLOW	200	EA	
MB	CRYSTAL & RED	25	EA	
			TOTAL	225 EA

06-DEC-2004 09:08
 \\e:\s-cct\su\B-3682\T.CP.B3682ANDW343TCP.DGN
 dlanford AT 12/03/04

APPROVED: 	DATE: 12/02/04	FINAL PAVEMENT MARKING SCHEDULE									
	SCALE: NONE										
	DATE: 12/02/04										
	DWG. BY: CLL										
	DESIGN BY: CLL										
REVIEWED BY: JI		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">REVISIONS</th> </tr> <tr> <td style="width: 50%;"> </td> <td style="width: 50%;"> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>		REVISIONS							
REVISIONS											