


PAVEMENT SCHEDULE	
C1	$1^{1}\!\!\!/_{2}''$ ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	$1^{1}\!\!\!/_{2}''$ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
E1	5″ ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
F1	#6M MAT COAT
т	AGGREGATE SHOULDER BORROW
U	EXISTING ASPHALT
V1	0" - 1½" MILLING
V2	1½″ MILLING

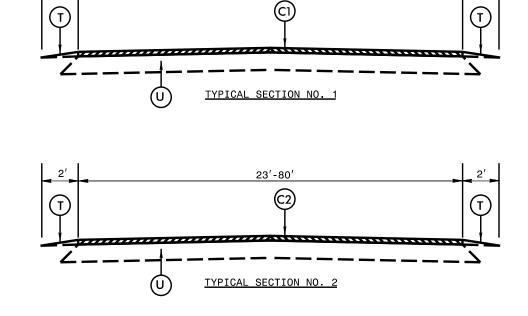


18'-30'

2'

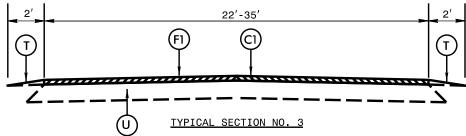

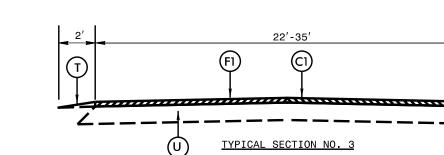

2′

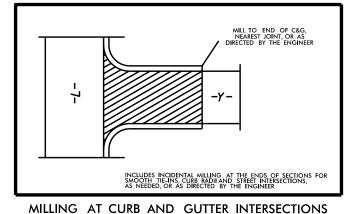


DEPTH, LENGTH & WIDTH VARIES

AS DIRECTED BY THE ENGINEER

PATCHING EXISTING PAVEMENT PATCHING TO BE PERFORMED PRIOR TO MILL AND FILL OPERATION

ACBC TYPE B25.0B OR ACSC TYPE SF9.5A, S9.5B OR S9.5C AS DIRECTED BY THE ENGINEER

PAVEMENT

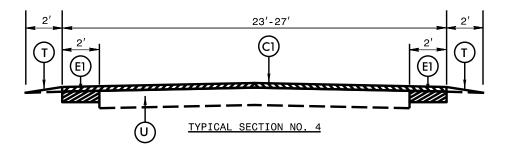



EXISTING

