

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	34442.1.3 (R-2514B)	1	23

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

PROJ. REFERENCE NO. 34442.1.3 (R-2514B) F.A. PROJ. N/A
COUNTY ONslow/JONES
PROJECT DESCRIPTION DUAL BRIDGES ON -L- OVER WHITE
OAK RIVER AT -L- STA. 173+55

SITE DESCRIPTION US 17 SOUTH OF BELGRADE TO NORTH OF
MAYSVILLE

CONTENTS

<u>SHEET</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2	LEGEND
3	SITE PLAN
4-5	PROFILE(S)
6-9	CROSS SECTION(S)
10-23	BORE LOG & CORE REPORT(S)

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING, AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N.C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6950. NEITHER THE SUBSURFACE PLANS AND REPORTS, NOR THE FIELD BORING LOGS, ROCK CORES, OR SOIL TEST DATA ARE PART OF THE CONTRACT.


GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION, AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THIS PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

PROJECT: 34442.1.3 ID: R-2514B

PERSONNEL
CATLIN

INVESTIGATED BY J.R. SWARTLEY
CHECKED BY N.T. ROBERSON
SUBMITTED BY N.T. ROBERSON
DATE DECEMBER 2013

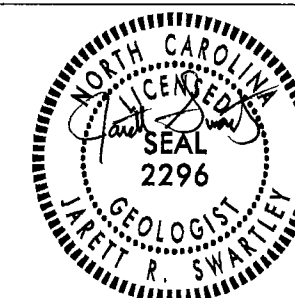

12-16-13

DRAWN BY: T.T. WALKER, J.R. SWARTLEY

NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N.C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IS IT CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.




NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

SUBSURFACE INVESTIGATION



SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS



SOIL DESCRIPTION										GRADATION										ROCK DESCRIPTION										TERMS AND DEFINITIONS																																							
SOIL IS CONSIDERED TO BE THE UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER, AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO STANDARD PENETRATION TEST (ASHTO T296, ASTM D-1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY SHALL INCLUDE: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. EXAMPLE: <i>VERY STIFF, GRAVELLY CLAY, MOST WITH INTERBEDDED FINE SAND LAYERS, HEAVY PLASTIC, A-7-6</i>										WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORM - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. (ALSO POORLY GRADED) GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLES OF TWO OR MORE SIZES. ANGULARITY OF GRAINS THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.										HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT IF TESTED, WOULD YIELD SPT REFUSAL. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 60 FT PER 60 BLOWS. IN NON-COASTAL PLAIN MATERIAL, THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS: WEATHERED ROCK (WR) [Symbol] NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED. CRYSTALLINE ROCK (CR) [Symbol] FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC. NON-CRYSTALLINE ROCK (NCR) [Symbol] FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC. COASTAL PLAIN SEDIMENTARY ROCK (CPI) [Symbol] COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.										ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOGGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS IN OR BPF OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 60 FT PER 60 BLOWS. STRATA CORE RECOVERY (SCRC) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SRQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.																																							
SOIL LEGEND AND AASHTO CLASSIFICATION										MINERALOGICAL COMPOSITION										WEATHERING										ROCK HARDNESS																																							
GENERAL CLASS. GRANULAR MATERIALS (<= 35% PASSING #200) SILT-CLAY MATERIALS (> 35% PASSING #200) ORGANIC MATERIALS										MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHENEVER THEY ARE CONSIDERED OF SIGNIFICANCE.										FRESH ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING, ROCK RINGS UNDER HAMMER IF CRYSTALLINE. VERY SLIGHT (V SL.) ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN, CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY, ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE. SLIGHT (SL.) ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH, OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS. MODERATE (MOD.) SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK. MODERATELY SEVERE (MOD. SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. IF TESTED, WOULD YIELD SPT REFUSAL. SEVERE (SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. IF TESTED, YIELDS SPT N VALUES > 100 BPF. VERY SEVERE (V SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT THE MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE SUCH THAT ONLY MINOR VESTIGES OF THE ORIGINAL ROCK FABRIC REMAIN. IF TESTED, YIELDS SPT N VALUES < 100 BPF. COMPLETE ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.										COMPRESSION SLIGHTLY COMPRESSIBLE LIQUID LIMIT LESS THAN 31 MODERATELY COMPRESSIBLE LIQUID LIMIT EQUAL TO 31-50 HIGHLY COMPRESSIBLE LIQUID LIMIT GREATER THAN 50										PERCENTAGE OF MATERIAL ORGANIC MATERIAL GRANULAR SILT-CLAY OTHER MATERIAL SOILS SOILS TRACE OF ORGANIC MATTER 2 - 3% 3 - 5% TRACE 1 - 10% LITTLE ORGANIC MATTER 3 - 5% 5 - 12% LITTLE 10 - 20% MODERATELY ORGANIC 5 - 10% 12 - 20% SOME 20 - 35% HIGHLY ORGANIC >10% >20% HIGHLY 35% AND ABOVE										GROUND WATER WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP										ROCK HARDNESS VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.									
CONSISTENCY OR DENSENESS										MISCELLANEOUS SYMBOLS										ROCK HARDNESS										ROCK HARDNESS																																							
PRIMARY SOIL TYPE COMPACTNESS OR CONSISTENCY RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE) RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)										ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY DIP & DIP DIRECTION OF ROCK STRUCTURES										TEST BORING AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION SLOPE INDICATOR INSTALLATION CONE PENETROMETER TEST SOUNDING ROD										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																																							
TEXTURE OR GRAIN SIZE										ABBREVIATIONS										ROCK HARDNESS										ROCK HARDNESS																																							
U.S. STD. SIEVE SIZE OPENING (MM) 4 10 40 60 200 270 4.76 2.00 0.42 0.25 0.075 0.053										AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST V - VOID RATIO F - FINE FOSS. - FOSSILIFEROUS FRAC. - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HL. - HIGHLY MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY VST - VANE SHEAR TEST WE. - WEATHERED MOD. - MODERATELY U - UNIT WEIGHT Wd - DRY UNIT WEIGHT										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																																																	
SOIL MOISTURE - CORRELATION OF TERMS										EQUIPMENT USED ON SUBJECT PROJECT										ROCK HARDNESS										ROCK HARDNESS																																							
SOIL MOISTURE SCALE (ATTERBERG LIMITS) FIELD MOISTURE DESCRIPTION GUIDE FOR FIELD MOISTURE DESCRIPTION										DRILL UNITS: MOBILE B- BK-51 CME-45C CME-550 PORTABLE HOIST										ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING W/ ADVANCER TRICONE STEEL TEETH TRICONE TUNG-CARB. CORE BIT										HAMMER TYPE: AUTOMATIC MANUAL CORE SIZE: B N H HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																													
PLASTICITY										FRACTURE SPACING										ROCK HARDNESS										ROCK HARDNESS																																							
NONPLASTIC LOW PLASTICITY MED. PLASTICITY HIGH PLASTICITY PLASTICITY INDEX (PI) DRY STRENGTH VERY LOW SLIGHT MEDIUM HIGH										DRILL UNITS: MOBILE B- BK-51 CME-45C CME-550 PORTABLE HOIST										ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING W/ ADVANCER TRICONE STEEL TEETH TRICONE TUNG-CARB. CORE BIT										HAMMER TYPE: AUTOMATIC MANUAL CORE SIZE: B N H HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																													
COLOR										FRACTURE SPACING										ROCK HARDNESS										ROCK HARDNESS																																							
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.										DRILL UNITS: MOBILE B- BK-51 CME-45C CME-550 PORTABLE HOIST										ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING W/ ADVANCER TRICONE STEEL TEETH TRICONE TUNG-CARB. CORE BIT										HAMMER TYPE: AUTOMATIC MANUAL CORE SIZE: B N H HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																													
PLASTICITY										FRACTURE SPACING										ROCK HARDNESS										ROCK HARDNESS																																							
NONPLASTIC LOW PLASTICITY MED. PLASTICITY HIGH PLASTICITY PLASTICITY INDEX (PI) DRY STRENGTH VERY LOW SLIGHT MEDIUM HIGH										DRILL UNITS: MOBILE B- BK-51 CME-45C CME-550 PORTABLE HOIST										ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING W/ ADVANCER TRICONE STEEL TEETH TRICONE TUNG-CARB. CORE BIT										HAMMER TYPE: AUTOMATIC MANUAL CORE SIZE: B N H HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																													
COLOR										FRACTURE SPACING										ROCK HARDNESS										ROCK HARDNESS																																							
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.										DRILL UNITS: MOBILE B- BK-51 CME-45C CME-550 PORTABLE HOIST										ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING W/ ADVANCER TRICONE STEEL TEETH TRICONE TUNG-CARB. CORE BIT										HAMMER TYPE: AUTOMATIC MANUAL CORE SIZE: B N H HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																													
PLASTICITY										FRACTURE SPACING										ROCK HARDNESS										ROCK HARDNESS																																							
NONPLASTIC LOW PLASTICITY MED. PLASTICITY HIGH PLASTICITY PLASTICITY INDEX (PI) DRY STRENGTH VERY LOW SLIGHT MEDIUM HIGH										DRILL UNITS: MOBILE B- BK-51 CME-45C CME-550 PORTABLE HOIST										ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING W/ ADVANCER TRICONE STEEL TEETH TRICONE TUNG-CARB. CORE BIT										HAMMER TYPE: AUTOMATIC MANUAL CORE SIZE: B N H HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																													
COLOR										FRACTURE SPACING										ROCK HARDNESS										ROCK HARDNESS																																							
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.										DRILL UNITS: MOBILE B- BK-51 CME-45C CME-550 PORTABLE HOIST										ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING W/ ADVANCER TRICONE STEEL TEETH TRICONE TUNG-CARB. CORE BIT										HAMMER TYPE: AUTOMATIC MANUAL CORE SIZE: B N H HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																													
PLASTICITY										FRACTURE SPACING										ROCK HARDNESS										ROCK HARDNESS																																							
NONPLASTIC LOW PLASTICITY MED. PLASTICITY HIGH PLASTICITY PLASTICITY INDEX (PI) DRY STRENGTH VERY LOW SLIGHT MEDIUM HIGH										DRILL UNITS: MOBILE B- BK-51 CME-45C CME-550 PORTABLE HOIST										ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING W/ ADVANCER TRICONE STEEL TEETH TRICONE TUNG-CARB. CORE BIT										HAMMER TYPE: AUTOMATIC MANUAL CORE SIZE: B N H HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																													
COLOR										FRACTURE SPACING										ROCK HARDNESS										ROCK HARDNESS																																							
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.										DRILL UNITS: MOBILE B- BK-51 CME-45C CME-550 PORTABLE HOIST										ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING W/ ADVANCER TRICONE STEEL TEETH TRICONE TUNG-CARB. CORE BIT										HAMMER TYPE: AUTOMATIC MANUAL CORE SIZE: B N H HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																													
PLASTICITY										FRACTURE SPACING										ROCK HARDNESS										ROCK HARDNESS																																							
NONPLASTIC LOW PLASTICITY MED. PLASTICITY HIGH PLASTICITY PLASTICITY INDEX (PI) DRY STRENGTH VERY LOW SLIGHT MEDIUM HIGH										DRILL UNITS: MOBILE B- BK-51 CME-45C CME-550 PORTABLE HOIST										ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING W/ ADVANCER TRICONE STEEL TEETH TRICONE TUNG-CARB. CORE BIT										HAMMER TYPE: AUTOMATIC MANUAL CORE SIZE: B N H HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE. VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																													
COLOR										FRACTURE SPACING										ROCK HARDNESS										ROCK HARDNESS																																							
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.										DRILL UNITS: MOBILE B- BK-51 CME-45C CME-550 PORTABLE HOIST										ADVANCING TOOLS: CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING W/ ADVANCER TRICONE STEEL TEETH TRICONE TUNG-CARB. CORE BIT										HAMMER TYPE: AUTOMATIC MANUAL CORE SIZE: B N H HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK. HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN. MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF THE GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS. MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK. SOFT CAN BE GROUDED OR GOUGED READILY BY																													

SITE PLAN

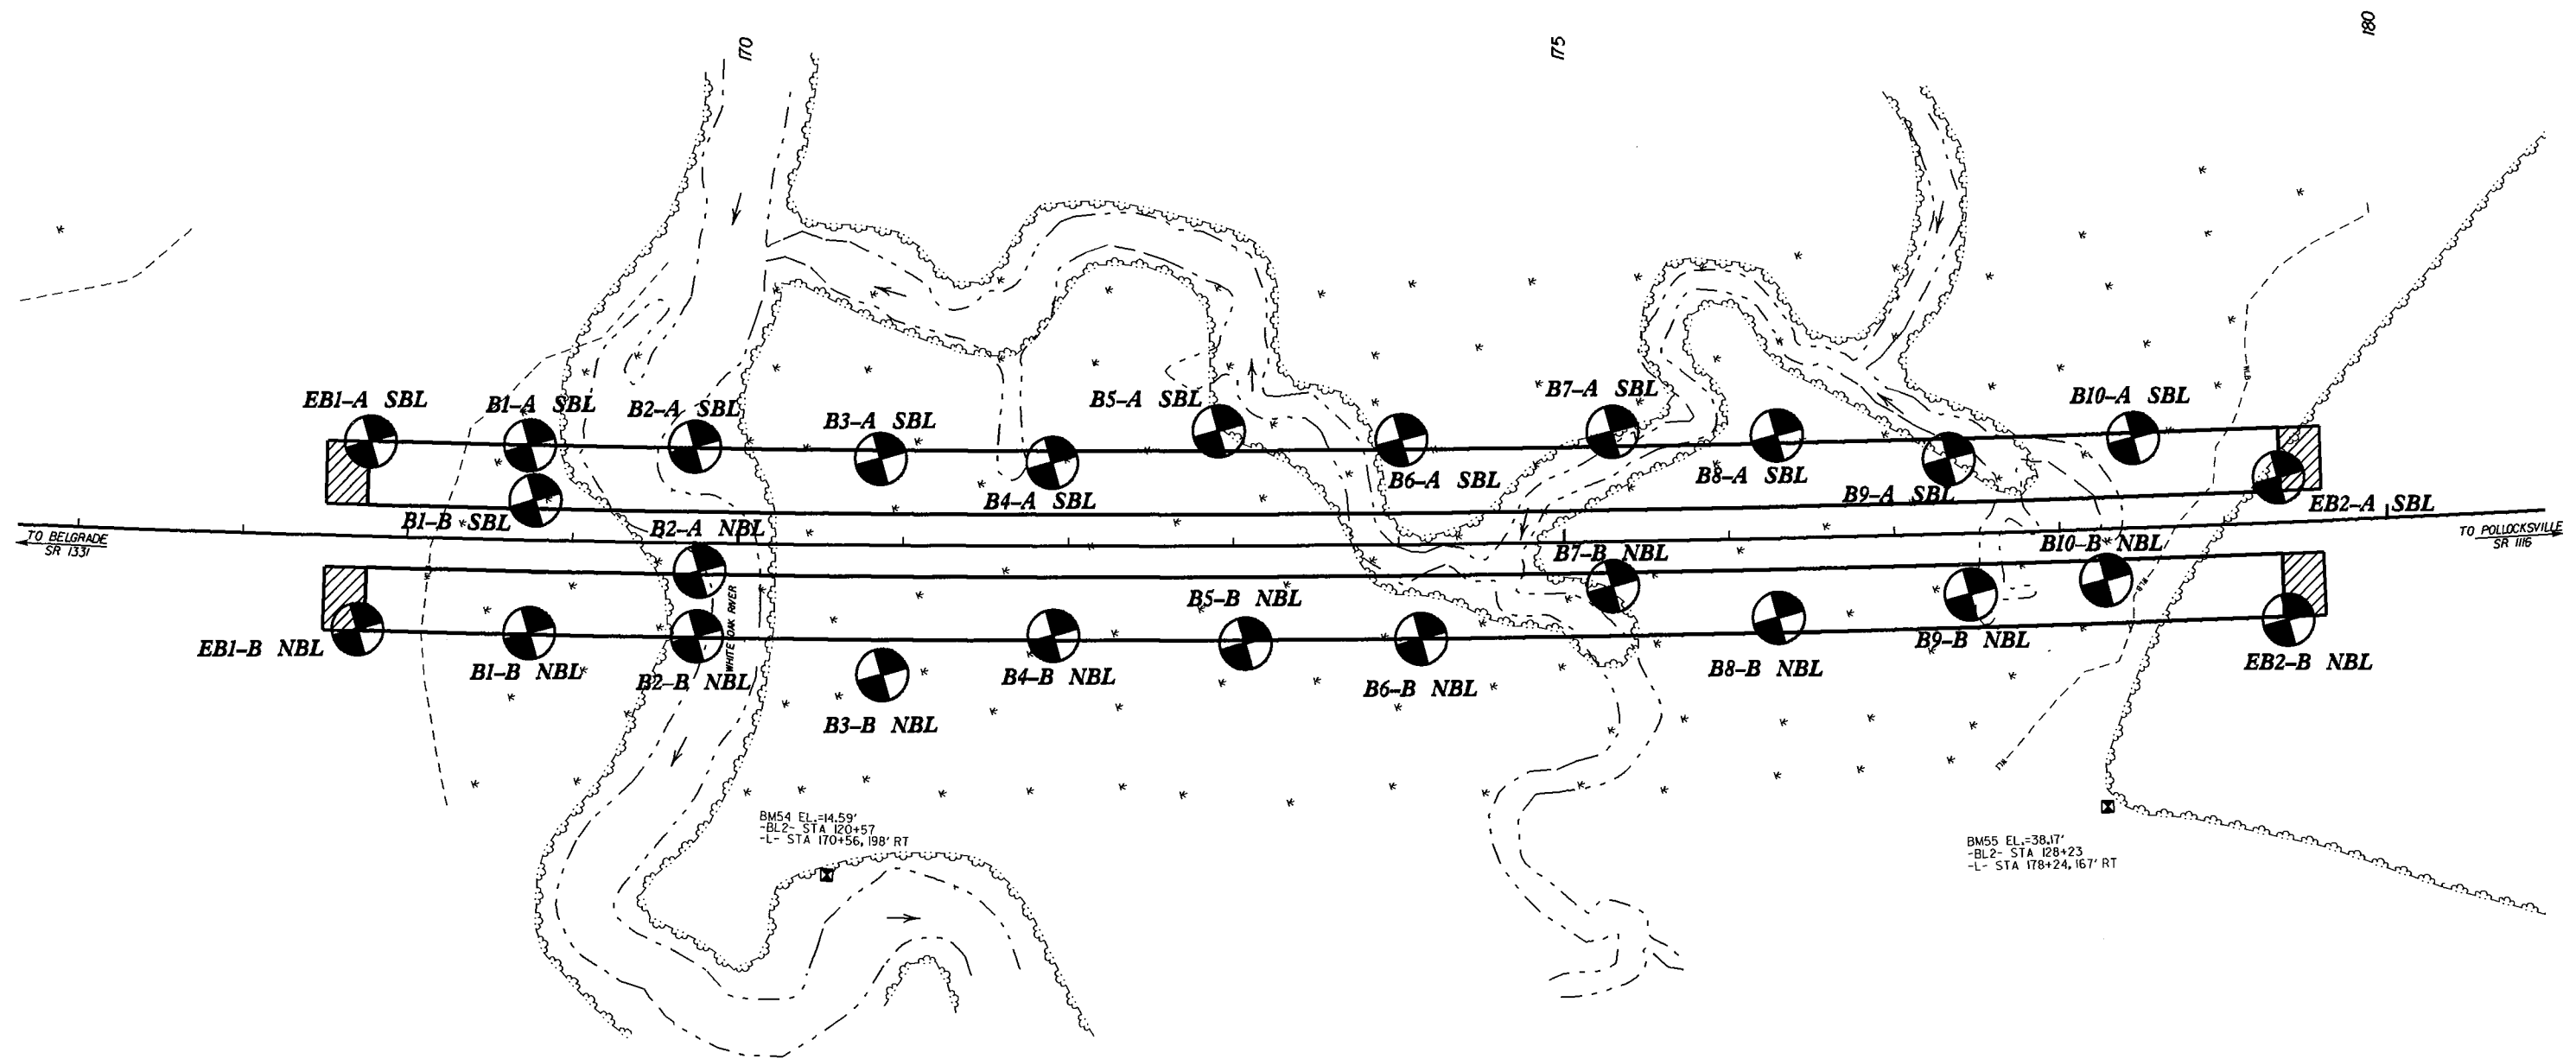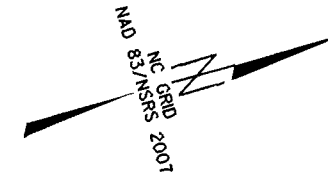

SKEW=90°

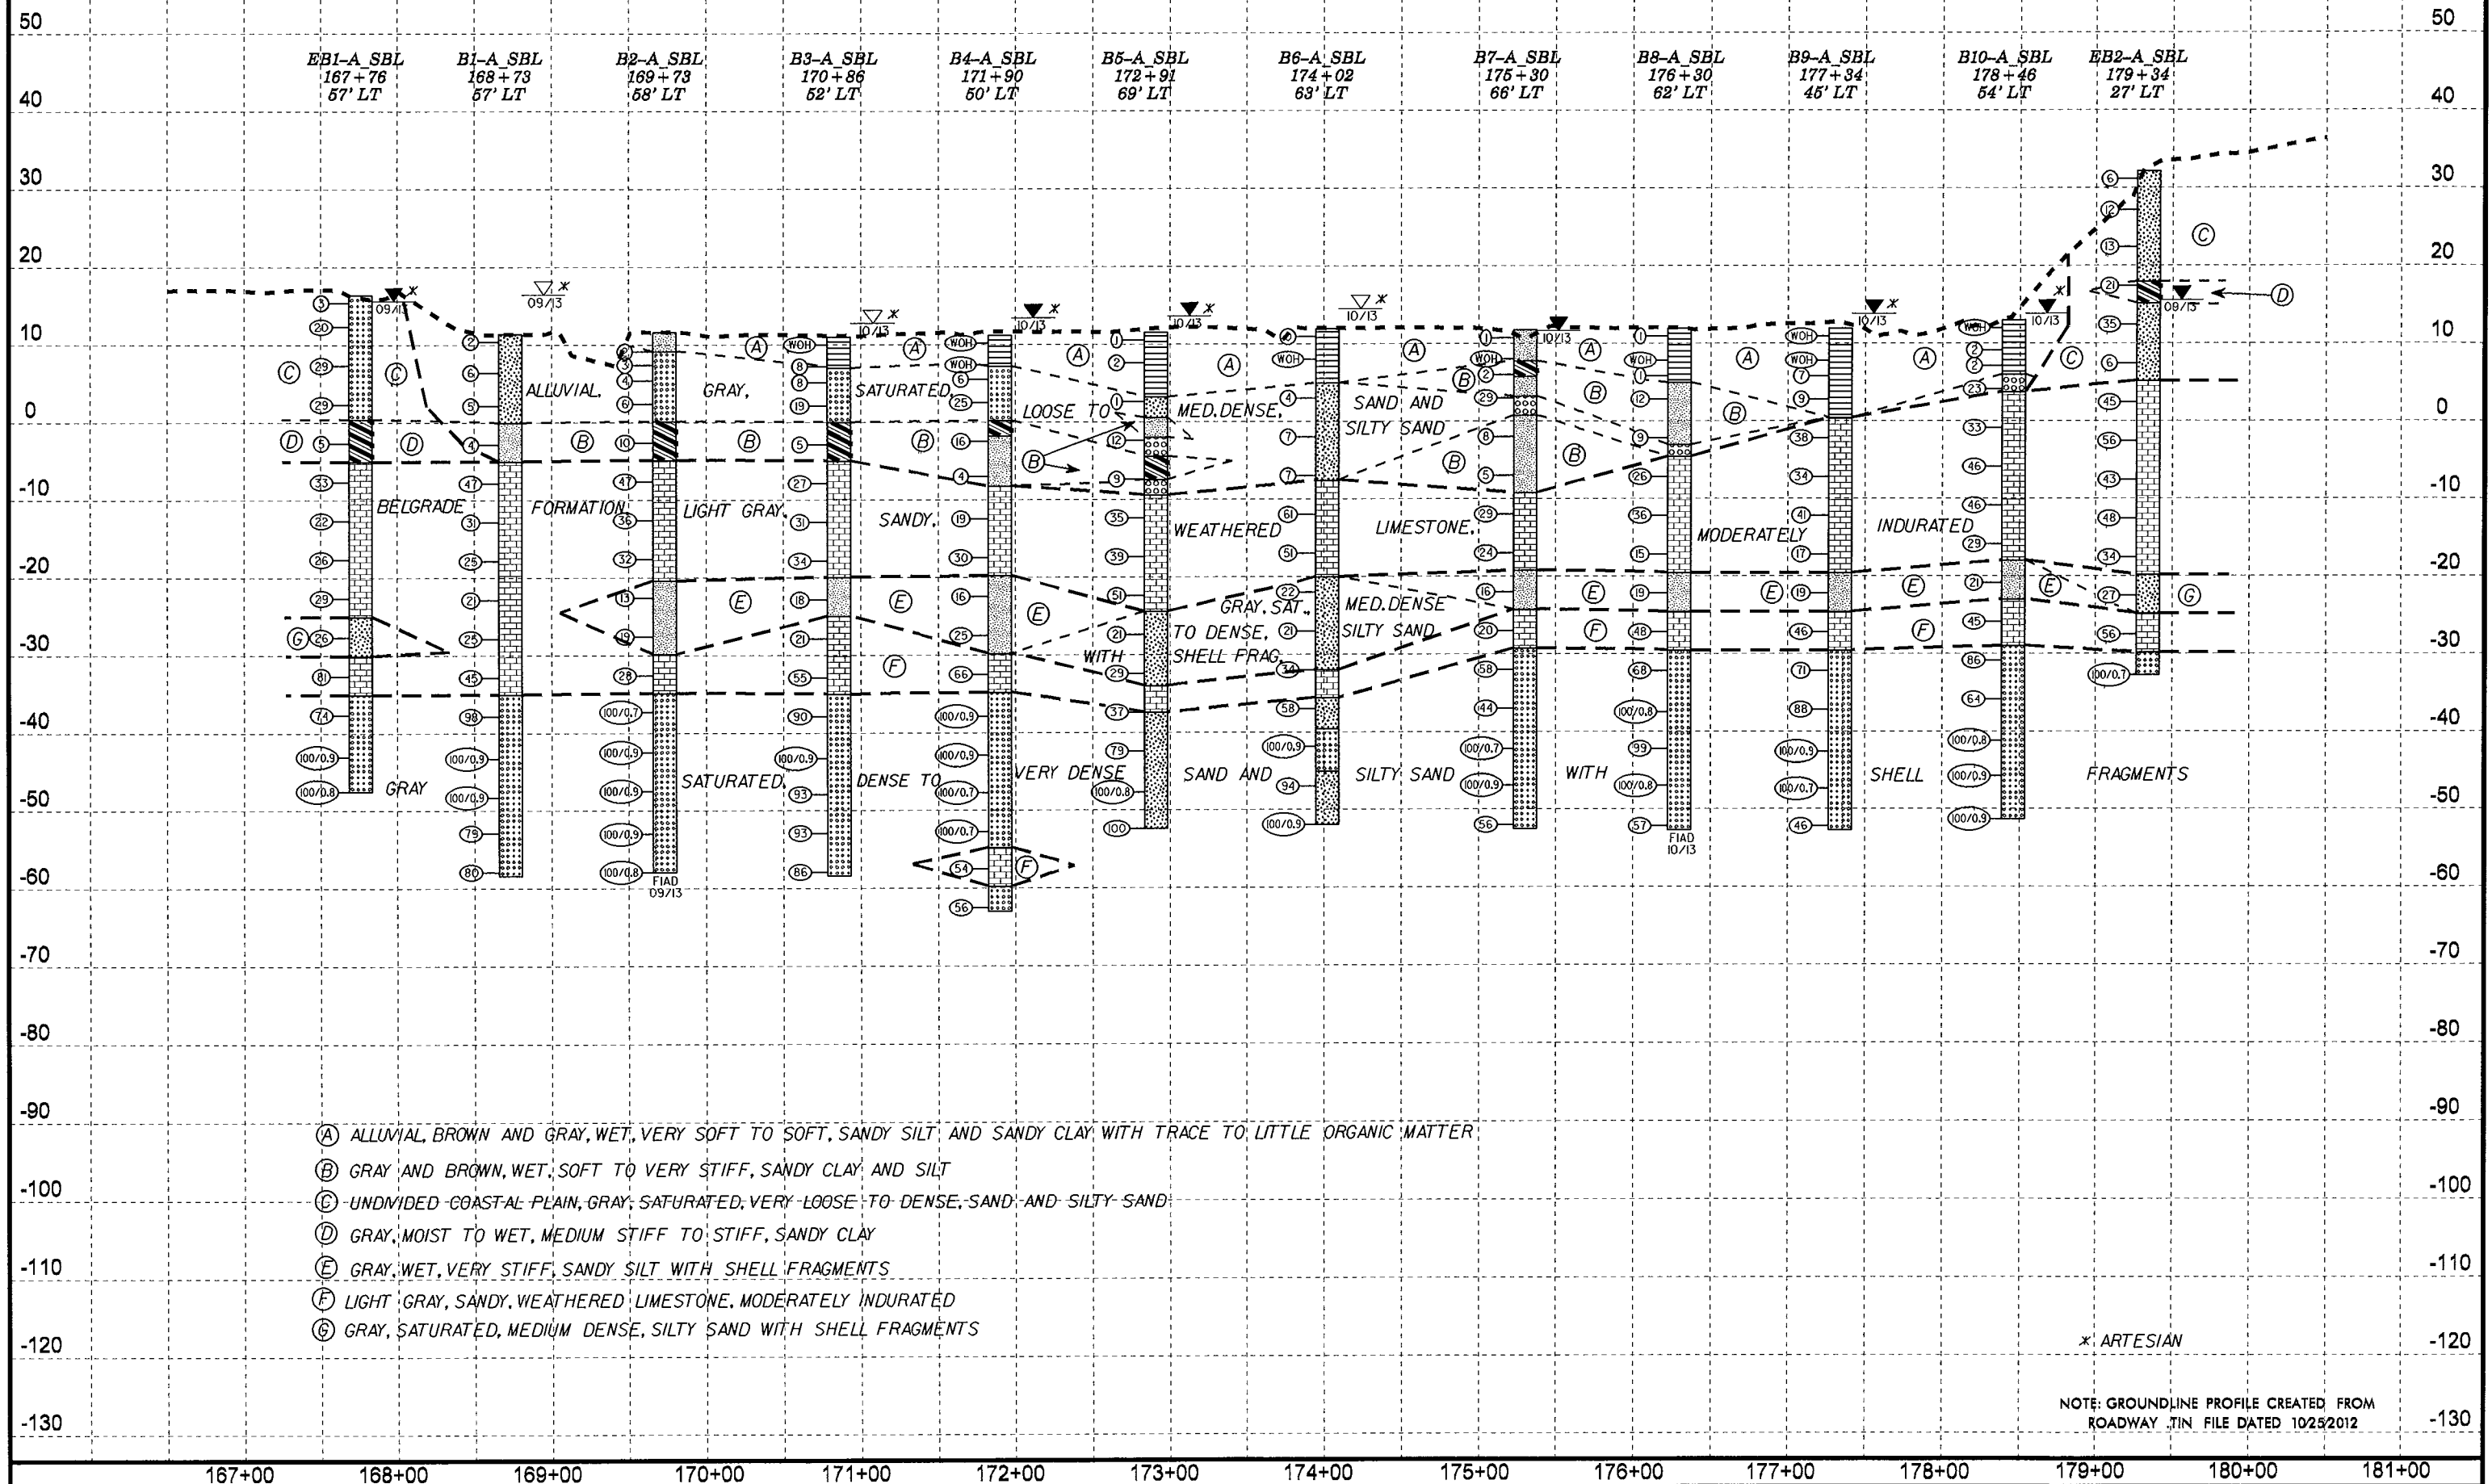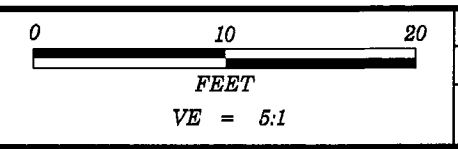


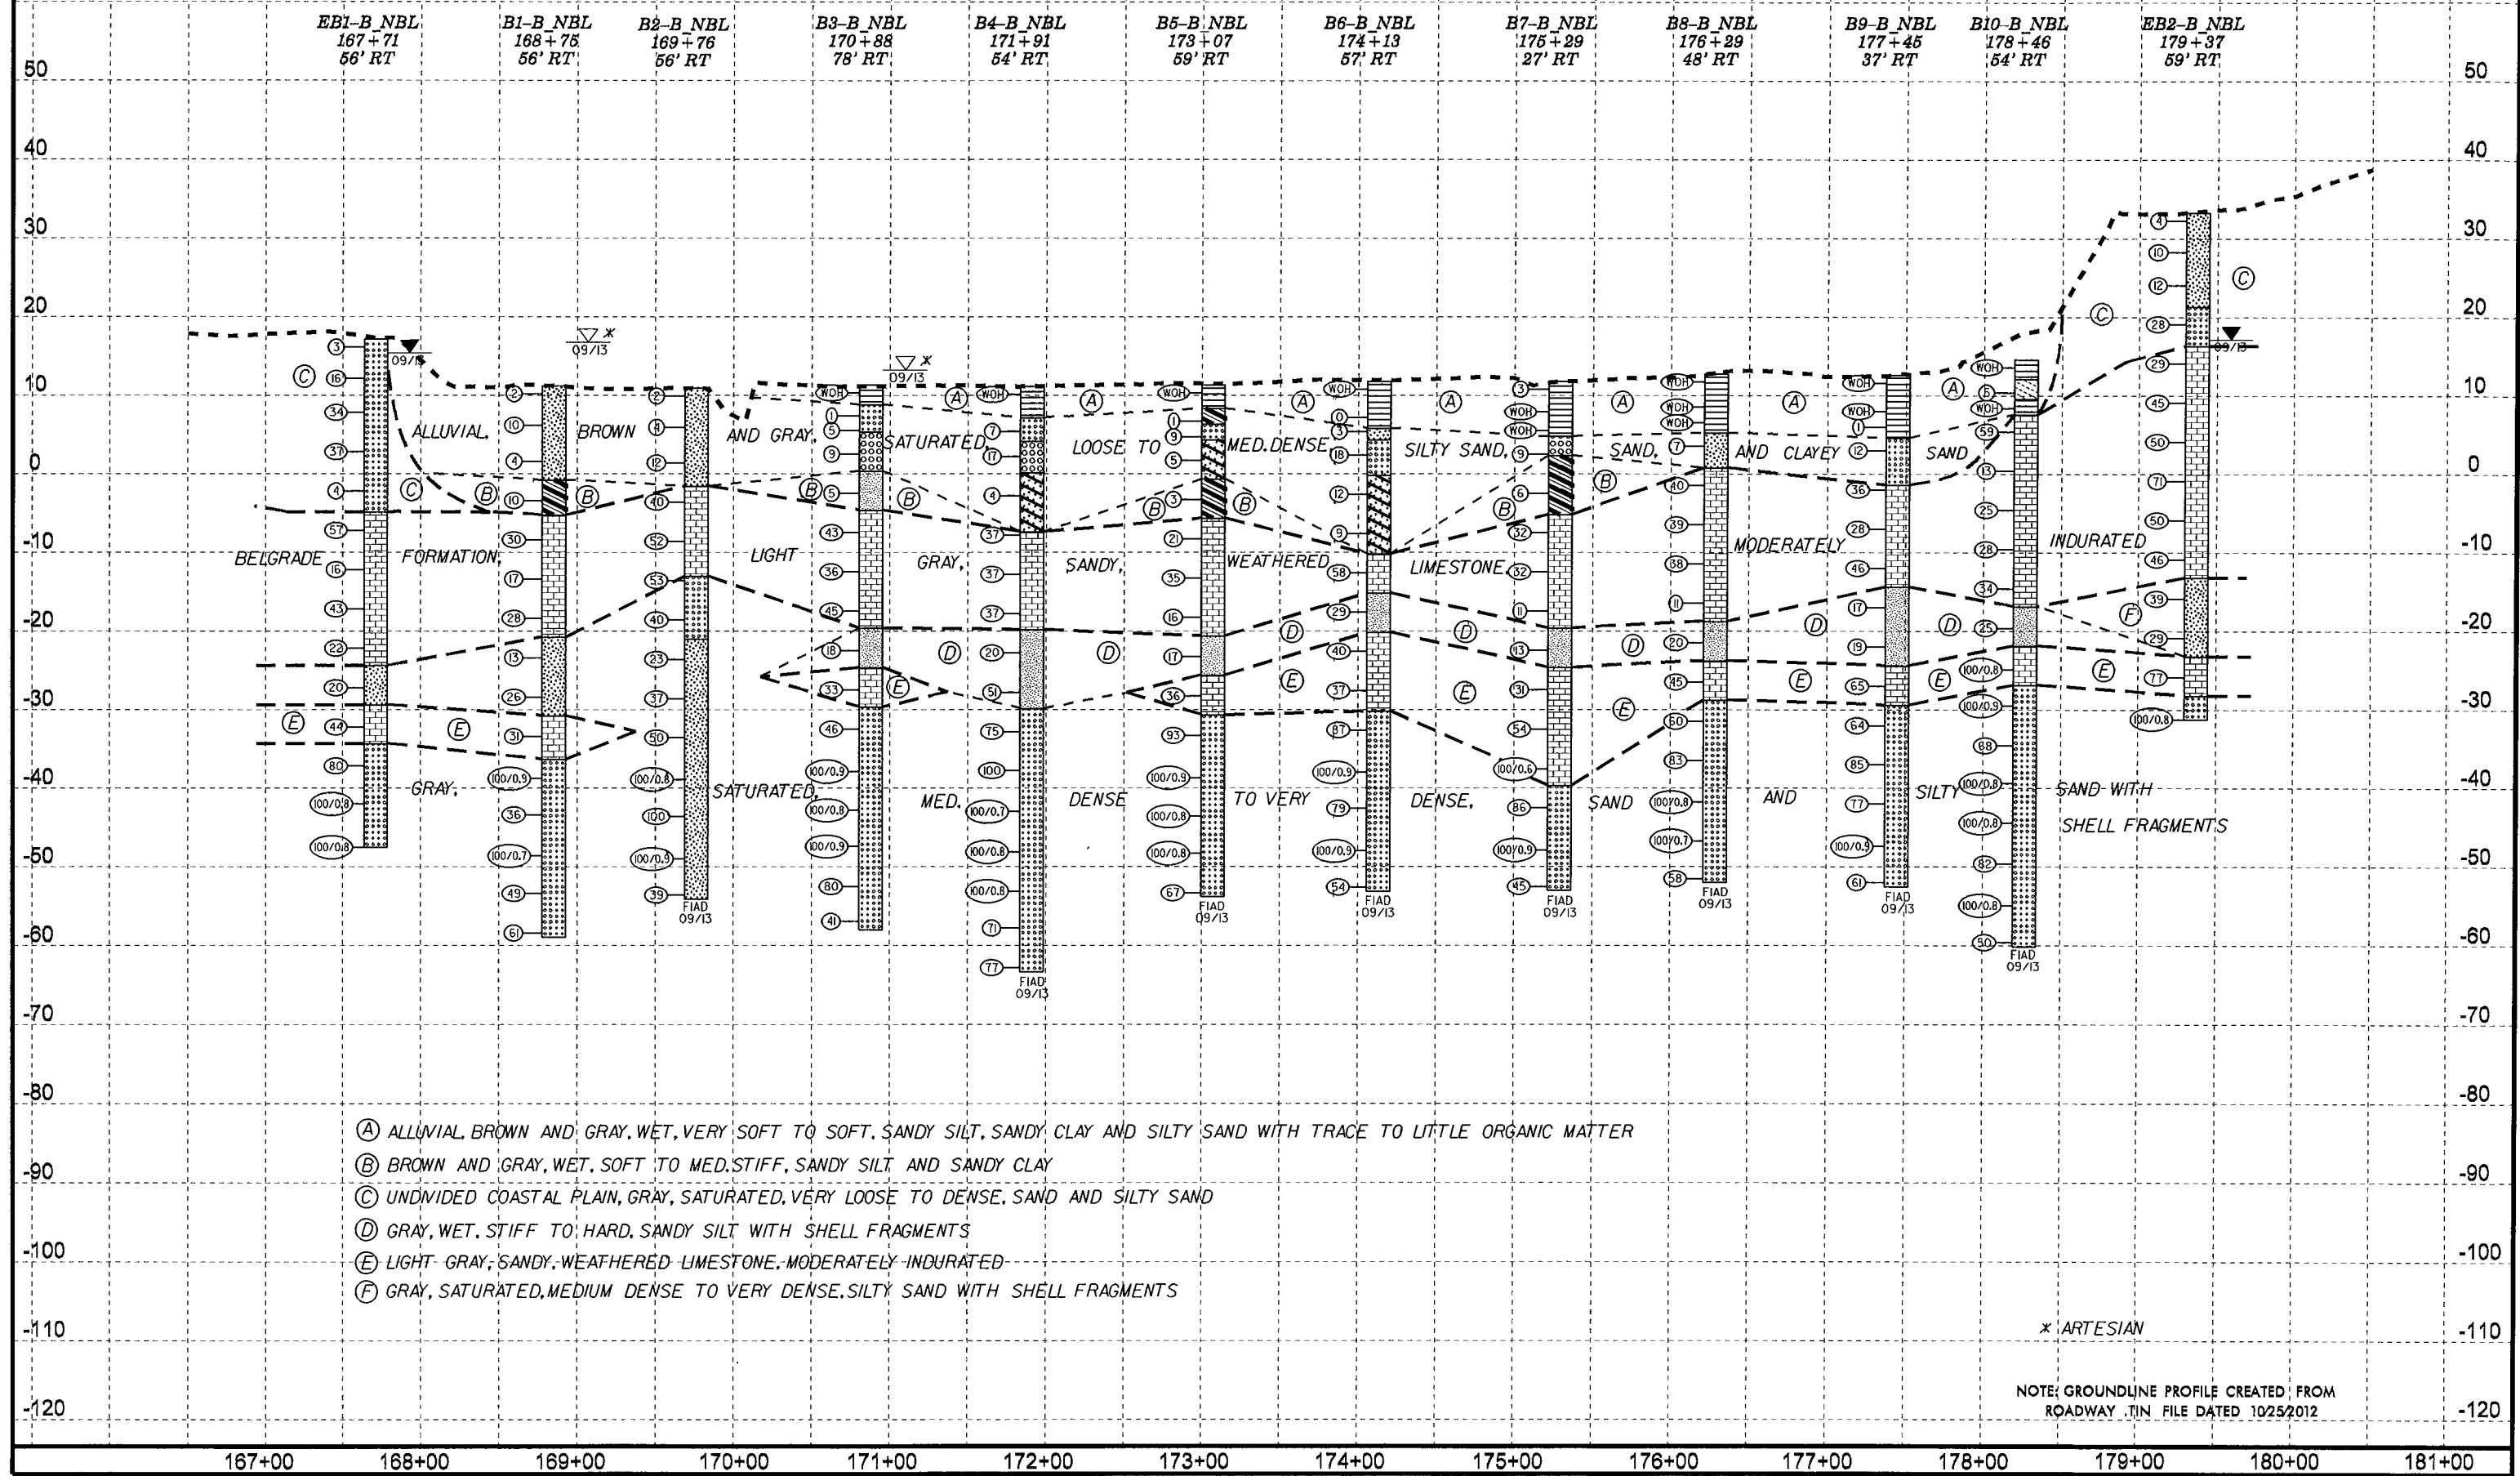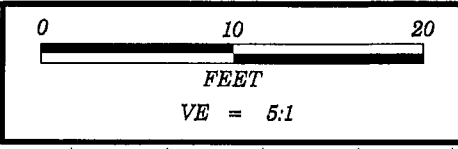

BI-B SBL
168+77
24' LT

BI-A SBL
168+76
57' LT

MATCHLINE

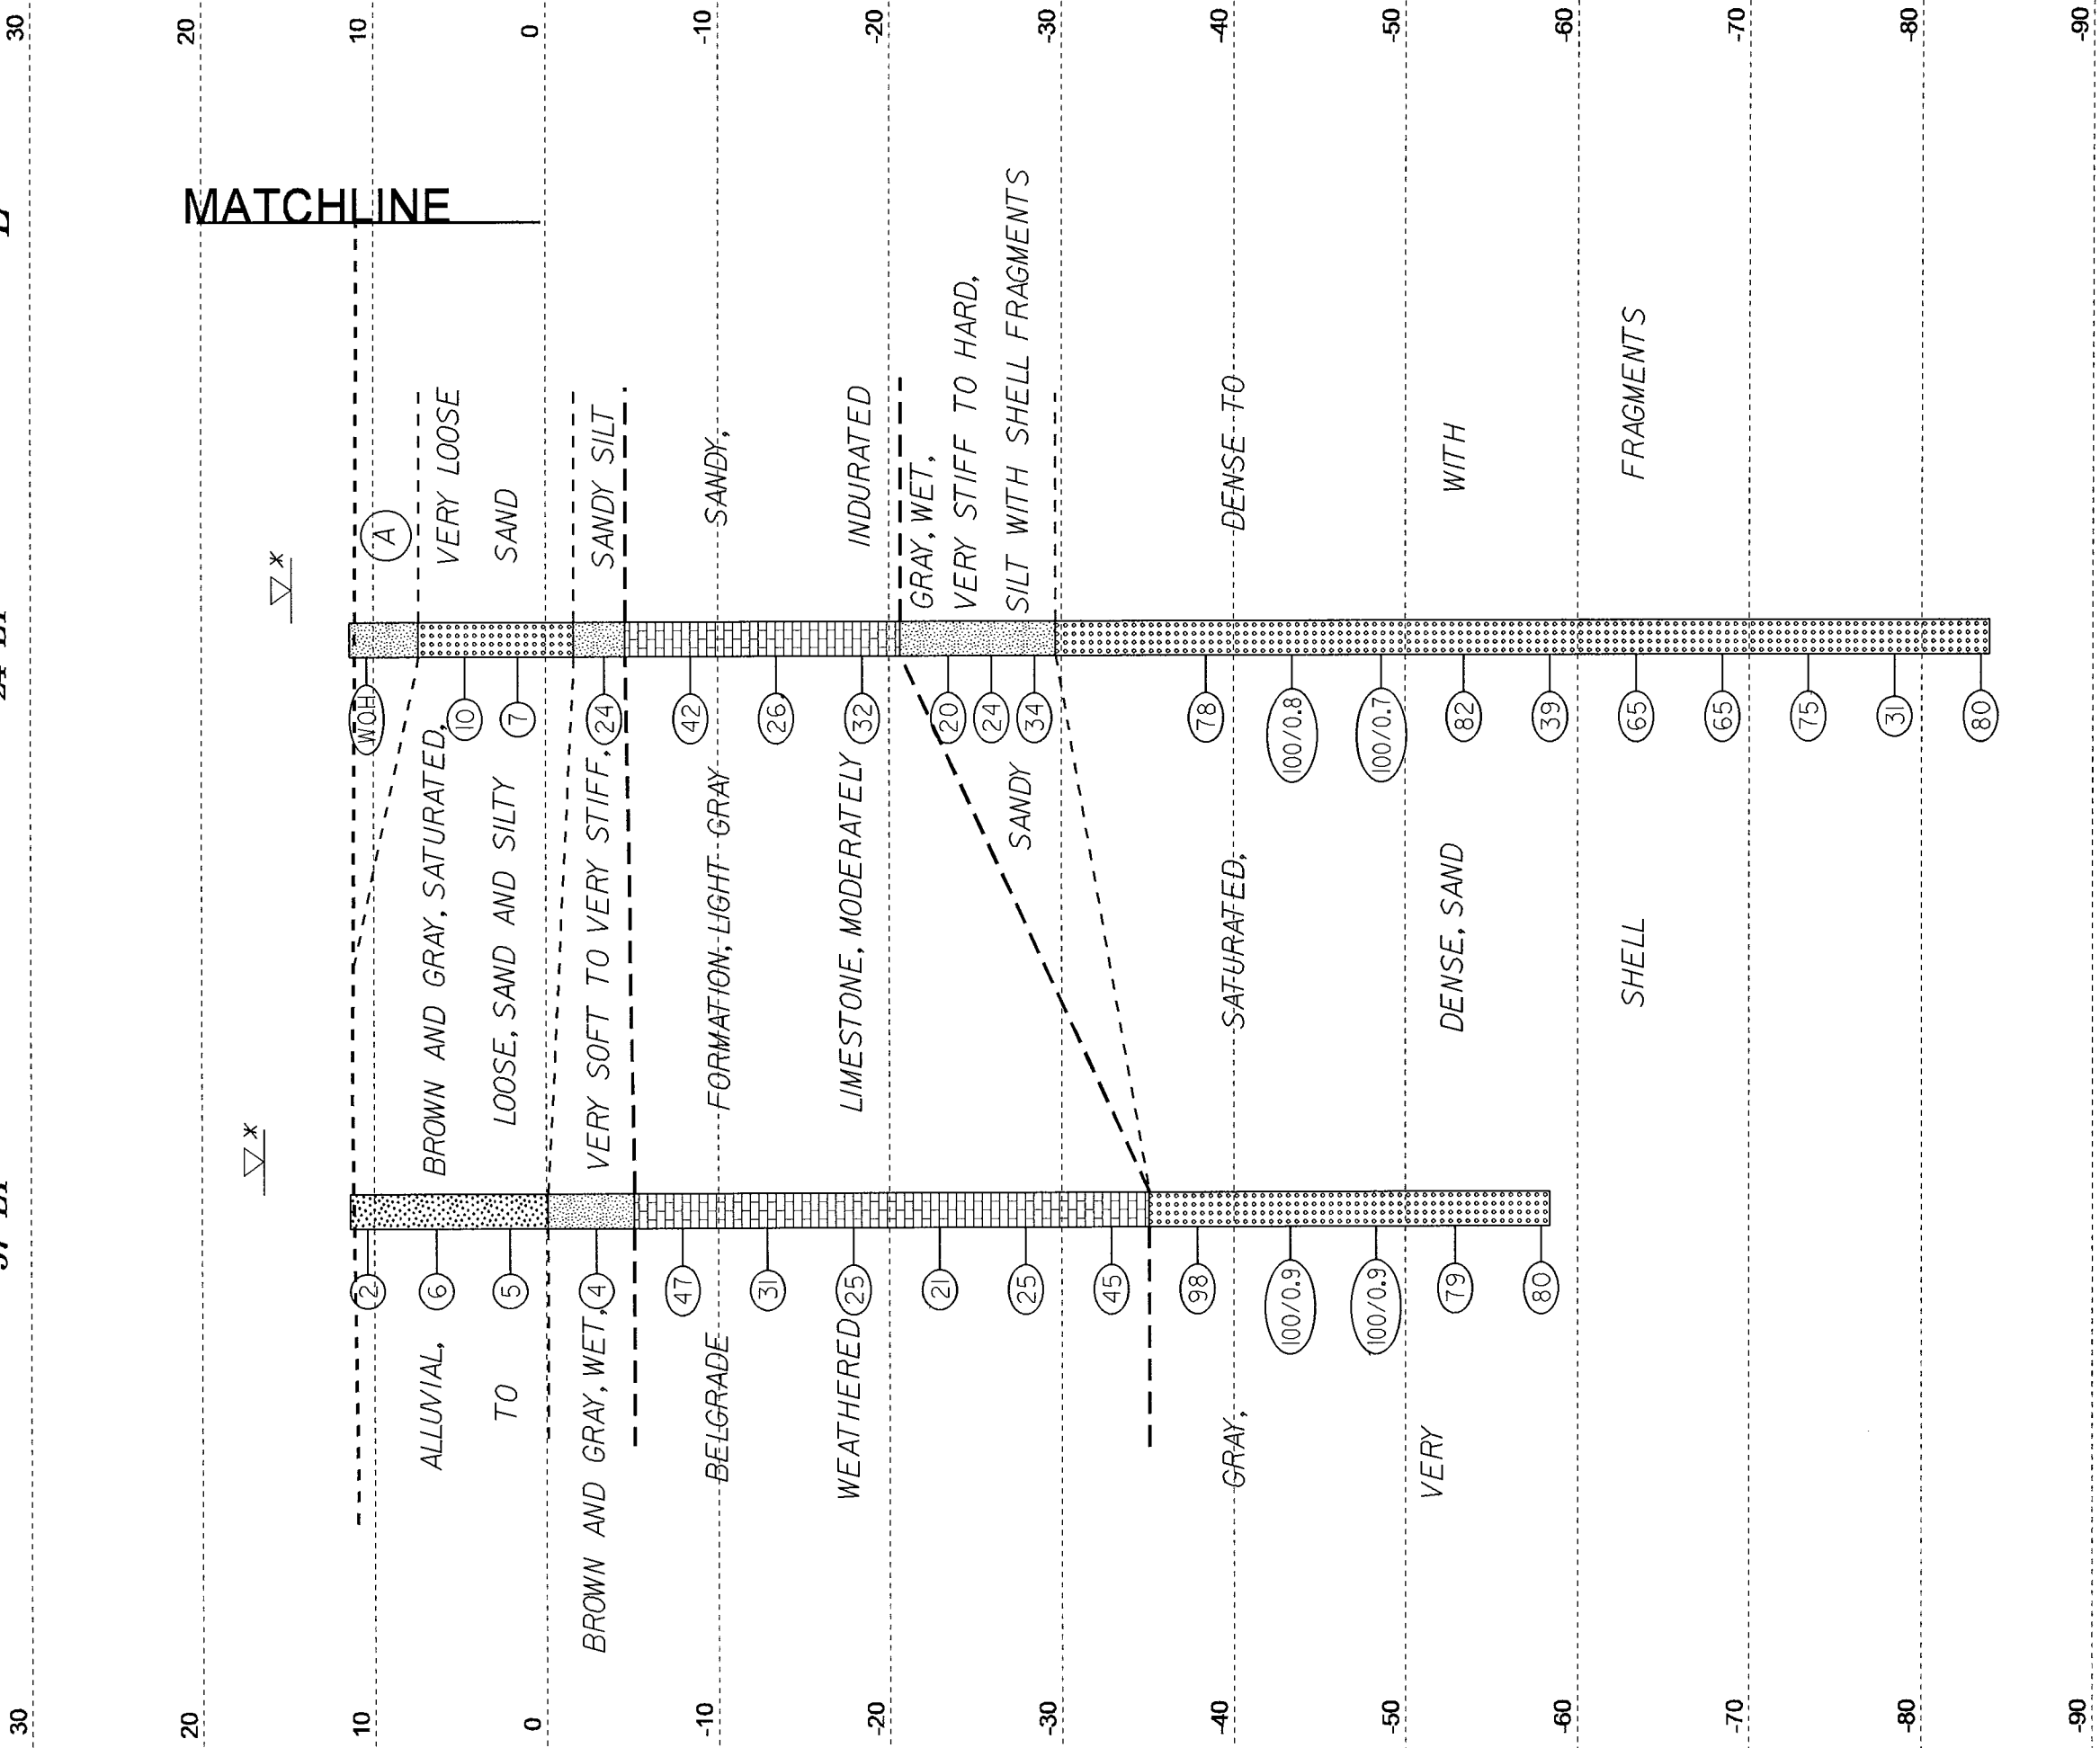

VE = 1:1


CROSS SECTION THROUGH BENT 1

(A) ALLUVIAL, BROWN AND GRAY, WET, VERY SOFT, SANDY SILT

* ARTESIAN

SKEW=90°

B1-B NBL
168+75
56' RT

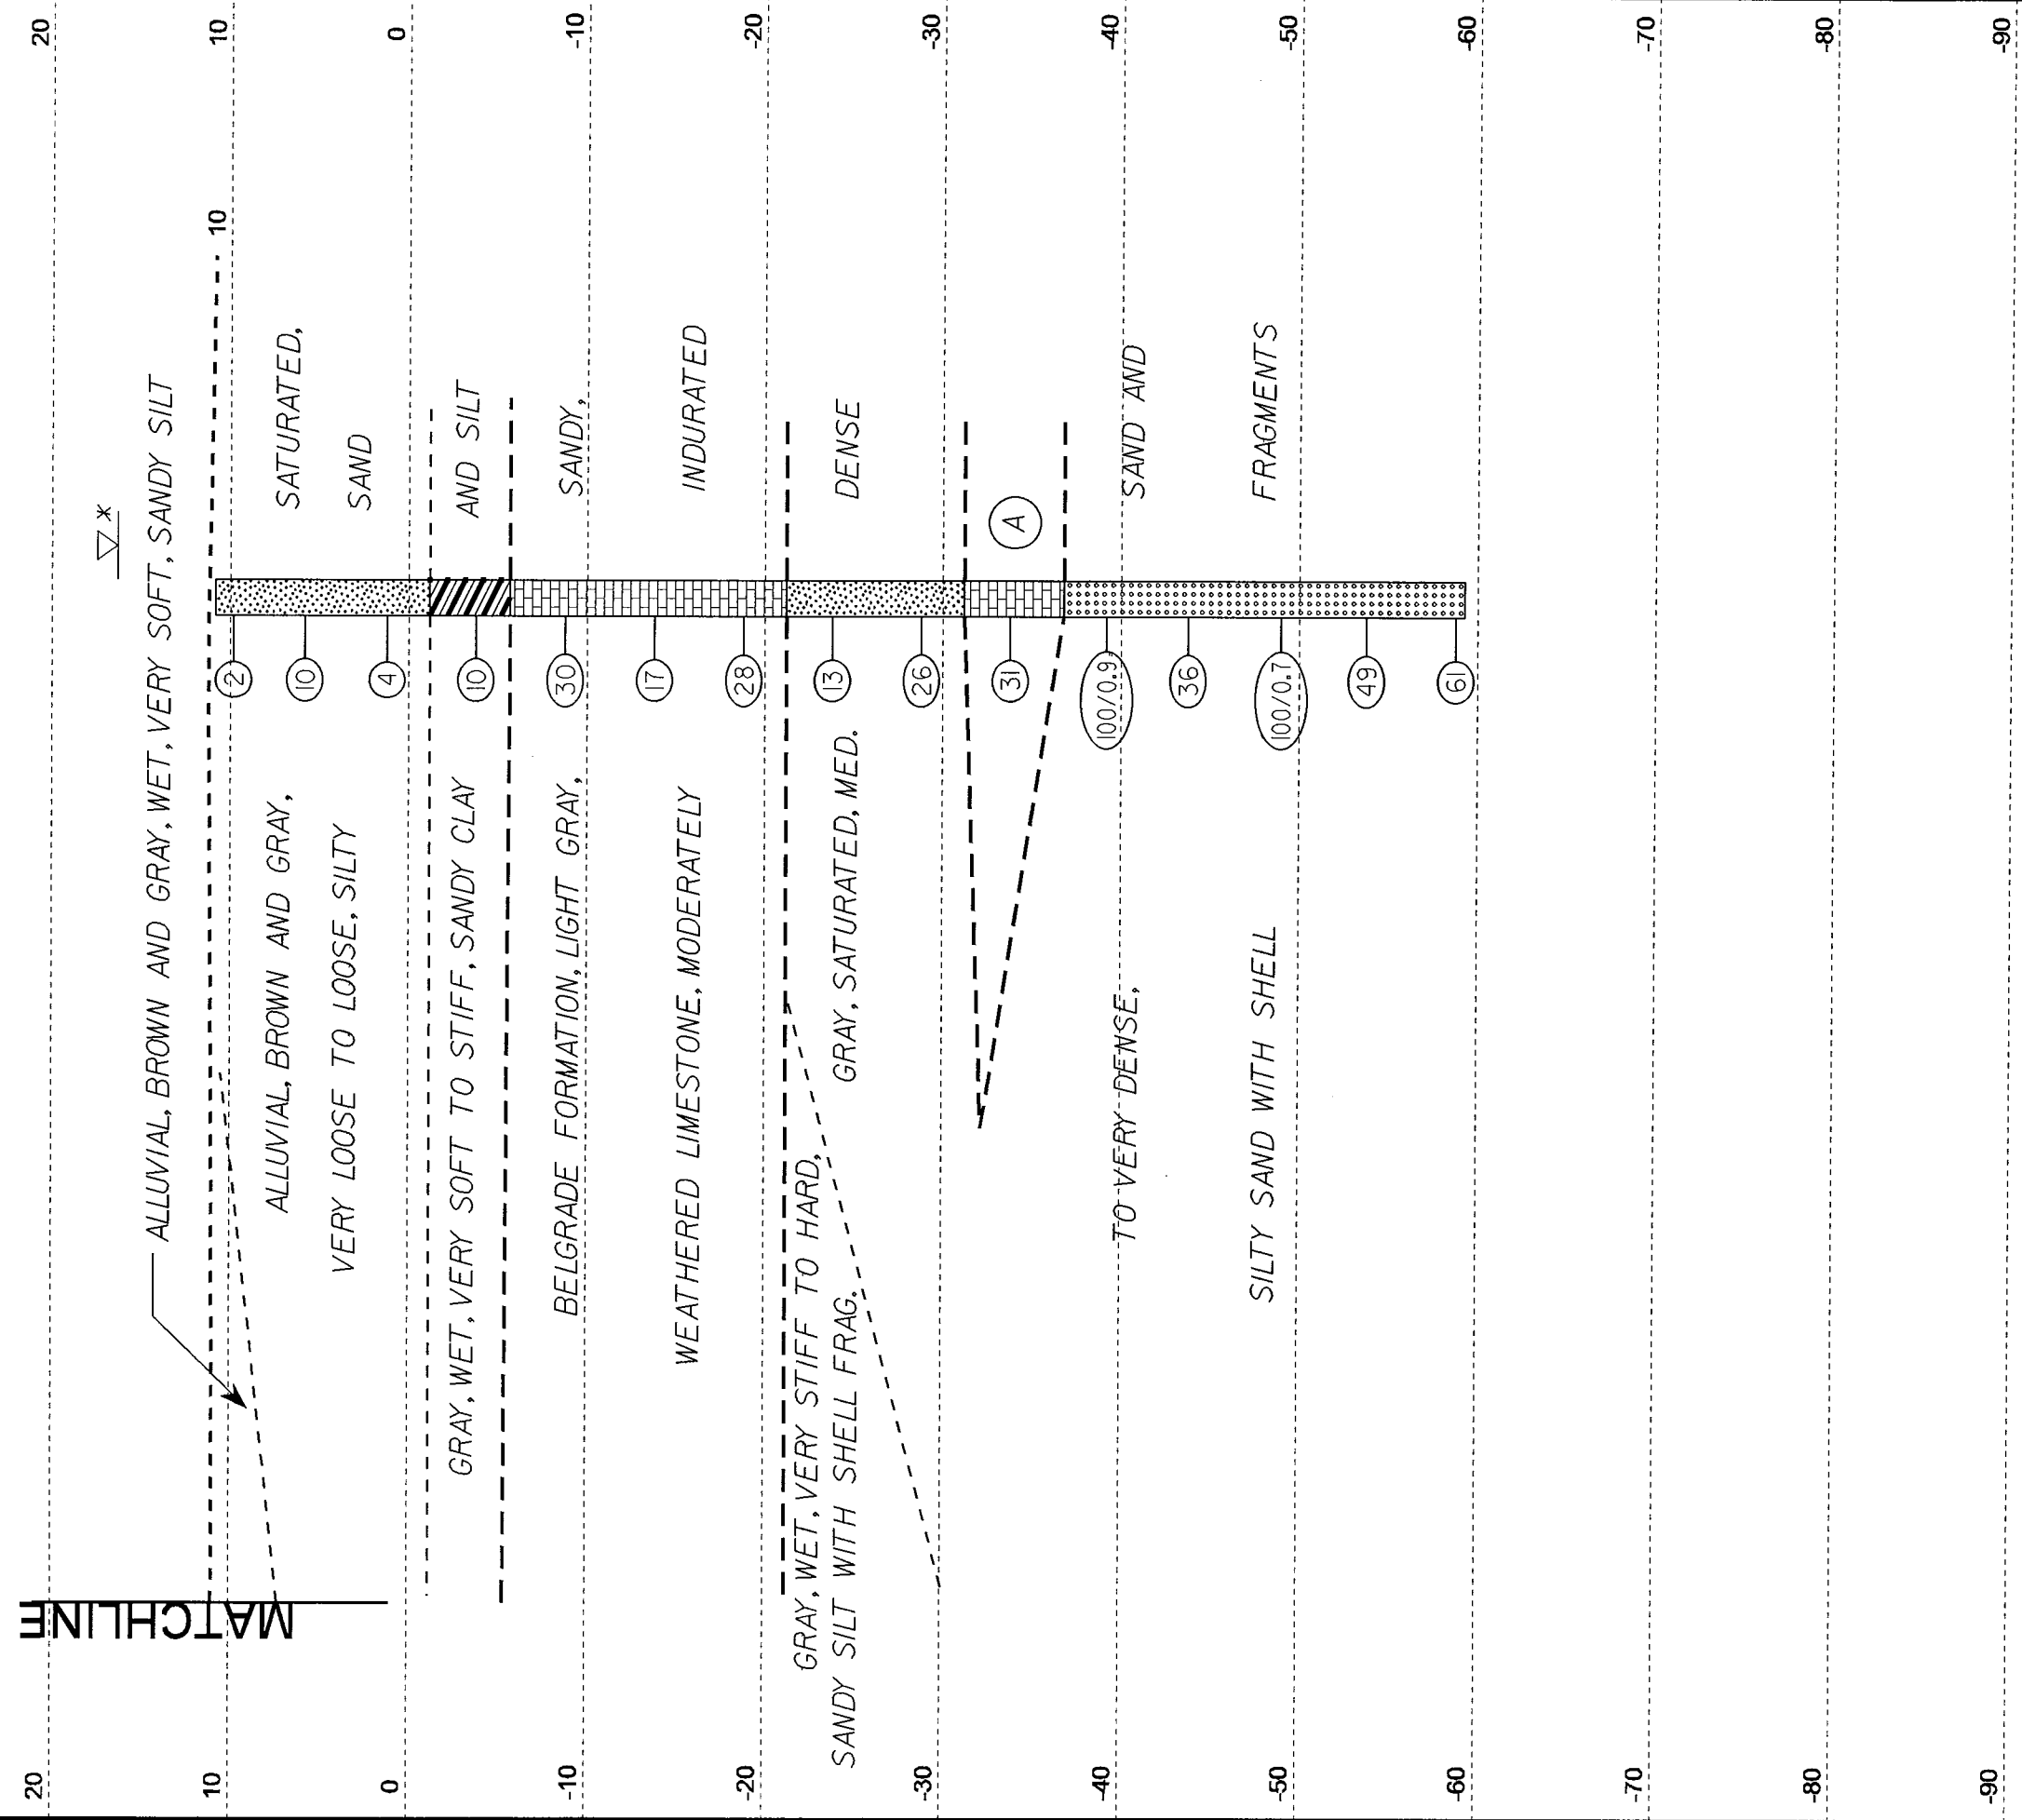

HORIZ. SCALE 0 10 20 (FEET)

VE = 1:1



CROSS SECTION THROUGH BENT 1

(A) LIGHT GRAY, SANDY, WEATHERED LIMESTONE, MODERATELY INDURATED

* ARTESIAN

SKEW=90°

B2-A SBL
169+23
58' LT

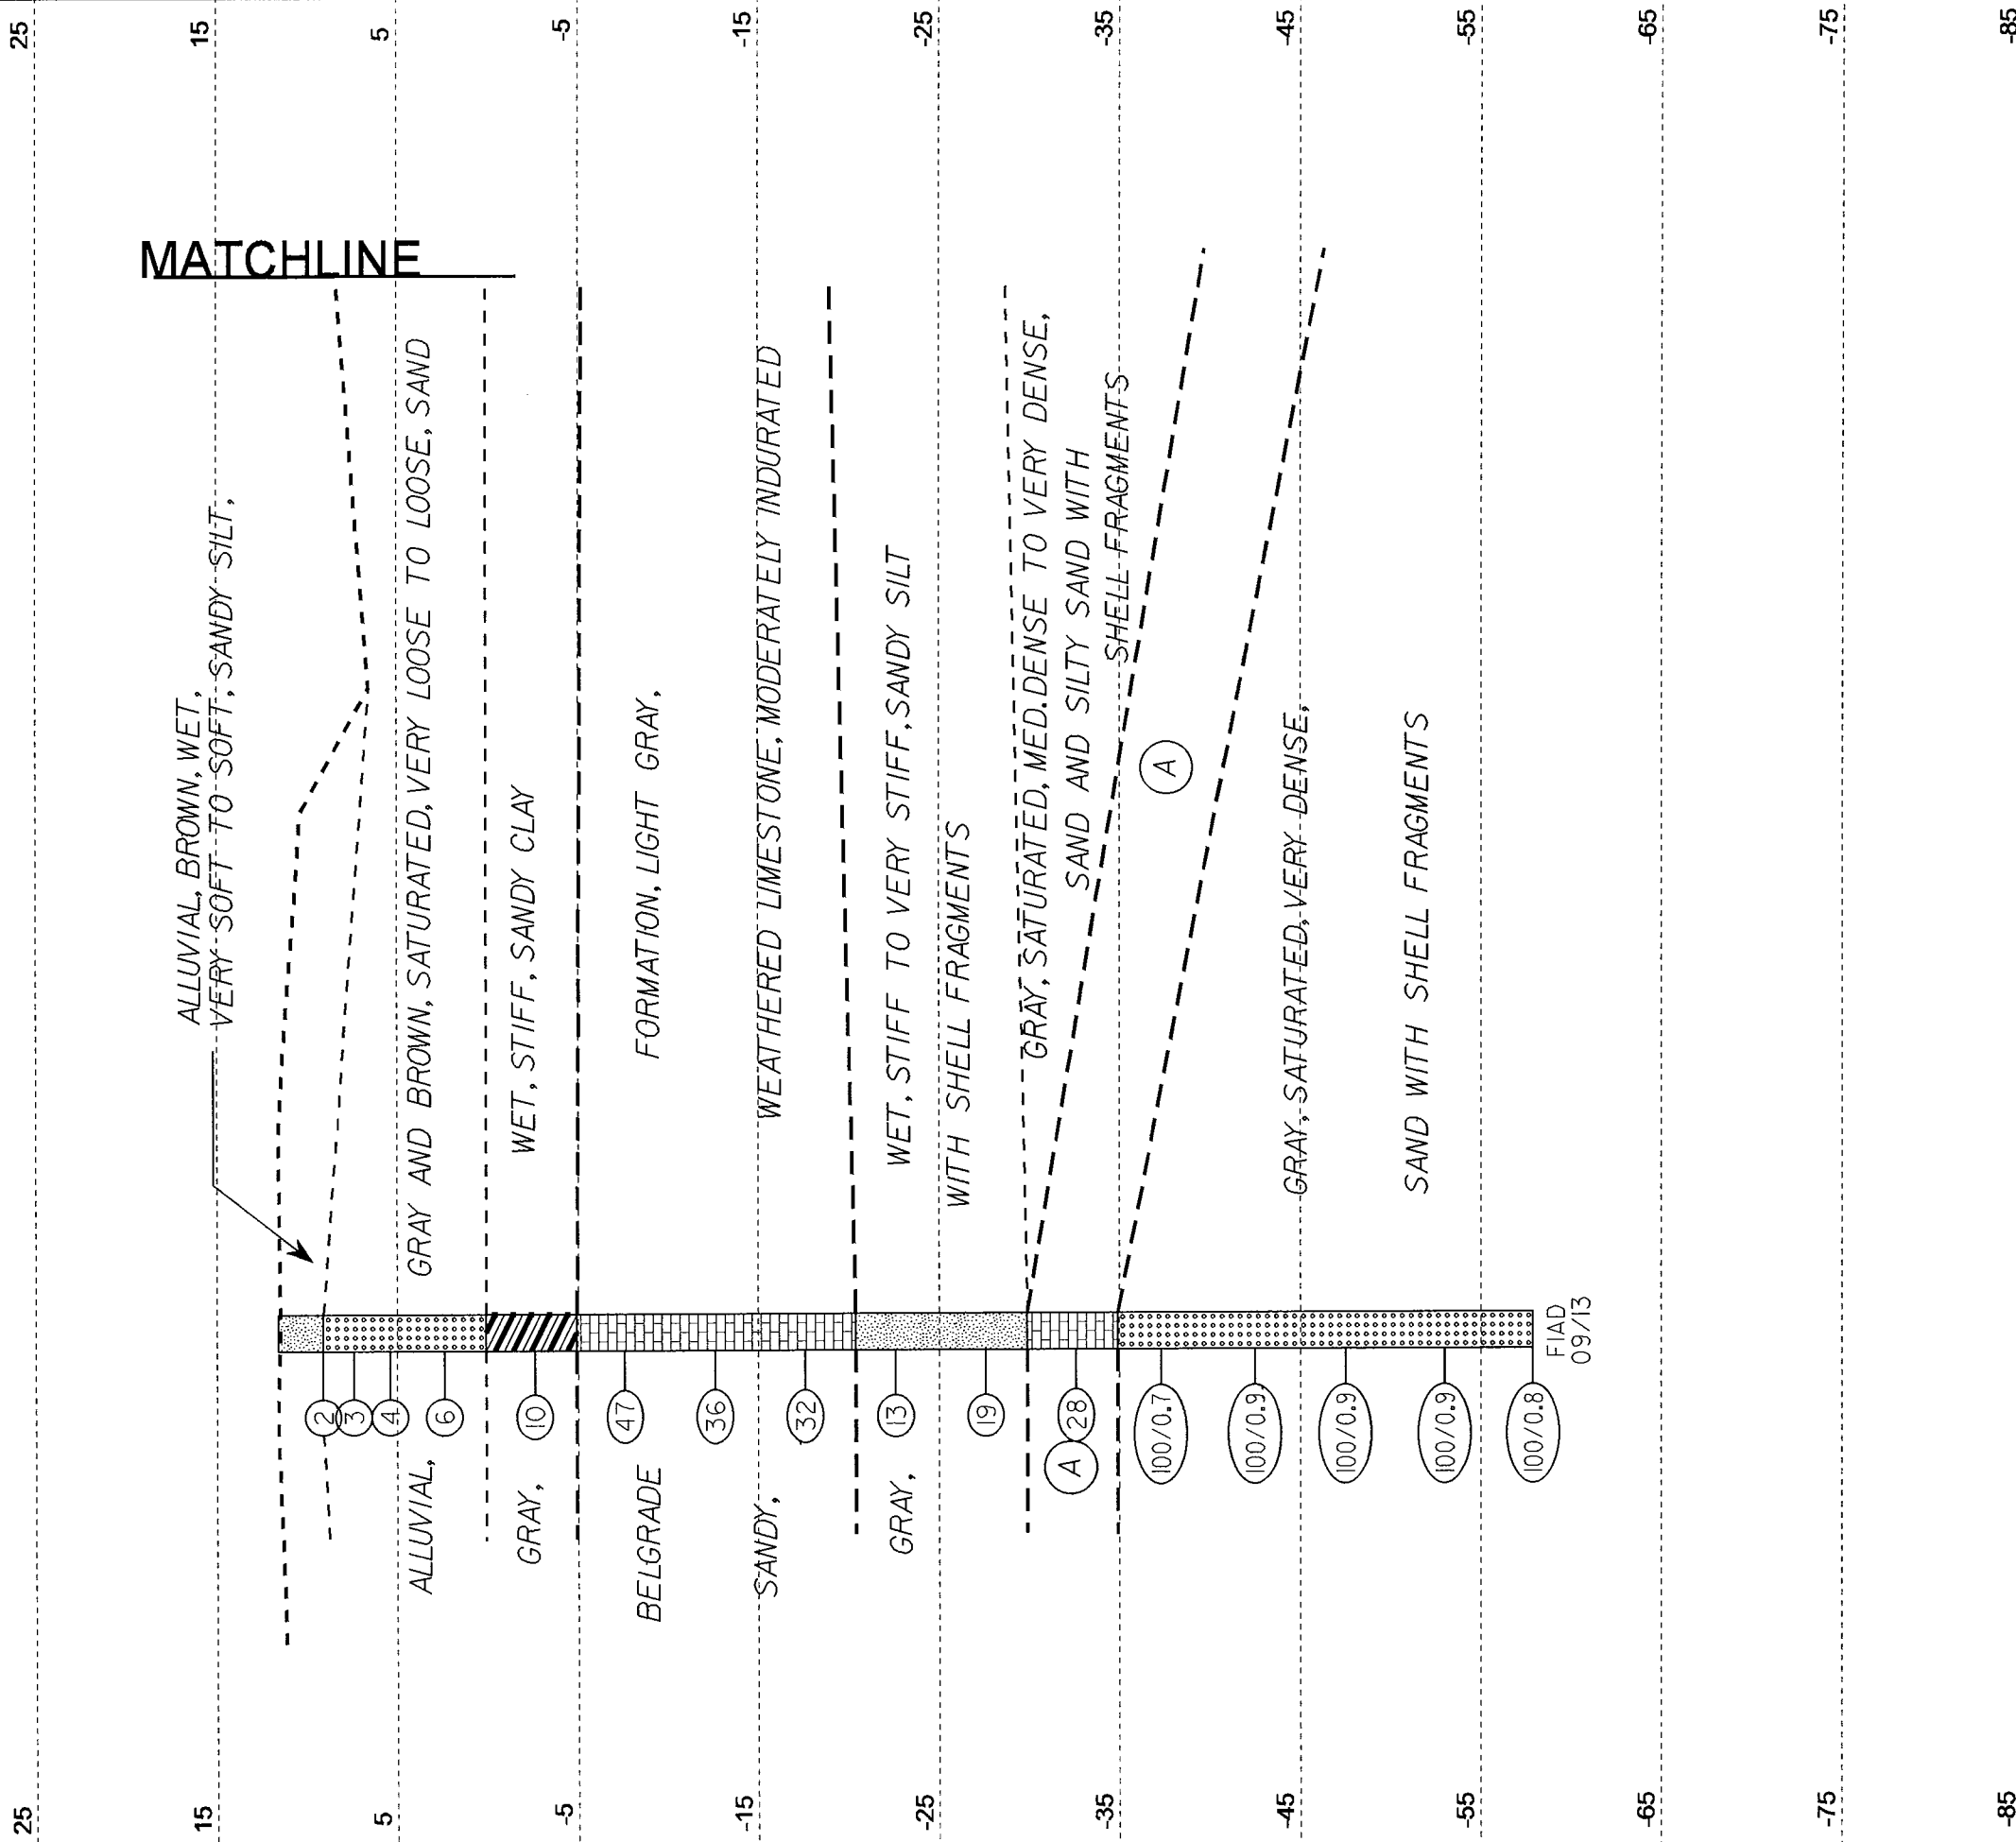

VE = 1:1

CROSS SECTION THROUGH BENT 2

PROJECT REFERENCE NO.	SHEET
34442.1.3 (R-2514B)	8

(A) LIGHT GRAY, SANDY, WEATHERED
LIMESTONE, MODERATELY INDURATED

SKEW=90°

B2-B NBL
169+76
56' RT

B2-A NBL
169+77
17' RT



25

25

MATCHLINE

ALLUVIAL, BROWN, WET, VERY SOFT TO SOFT, SANDY SILT, WITH TRACE ORGANICS

▽*

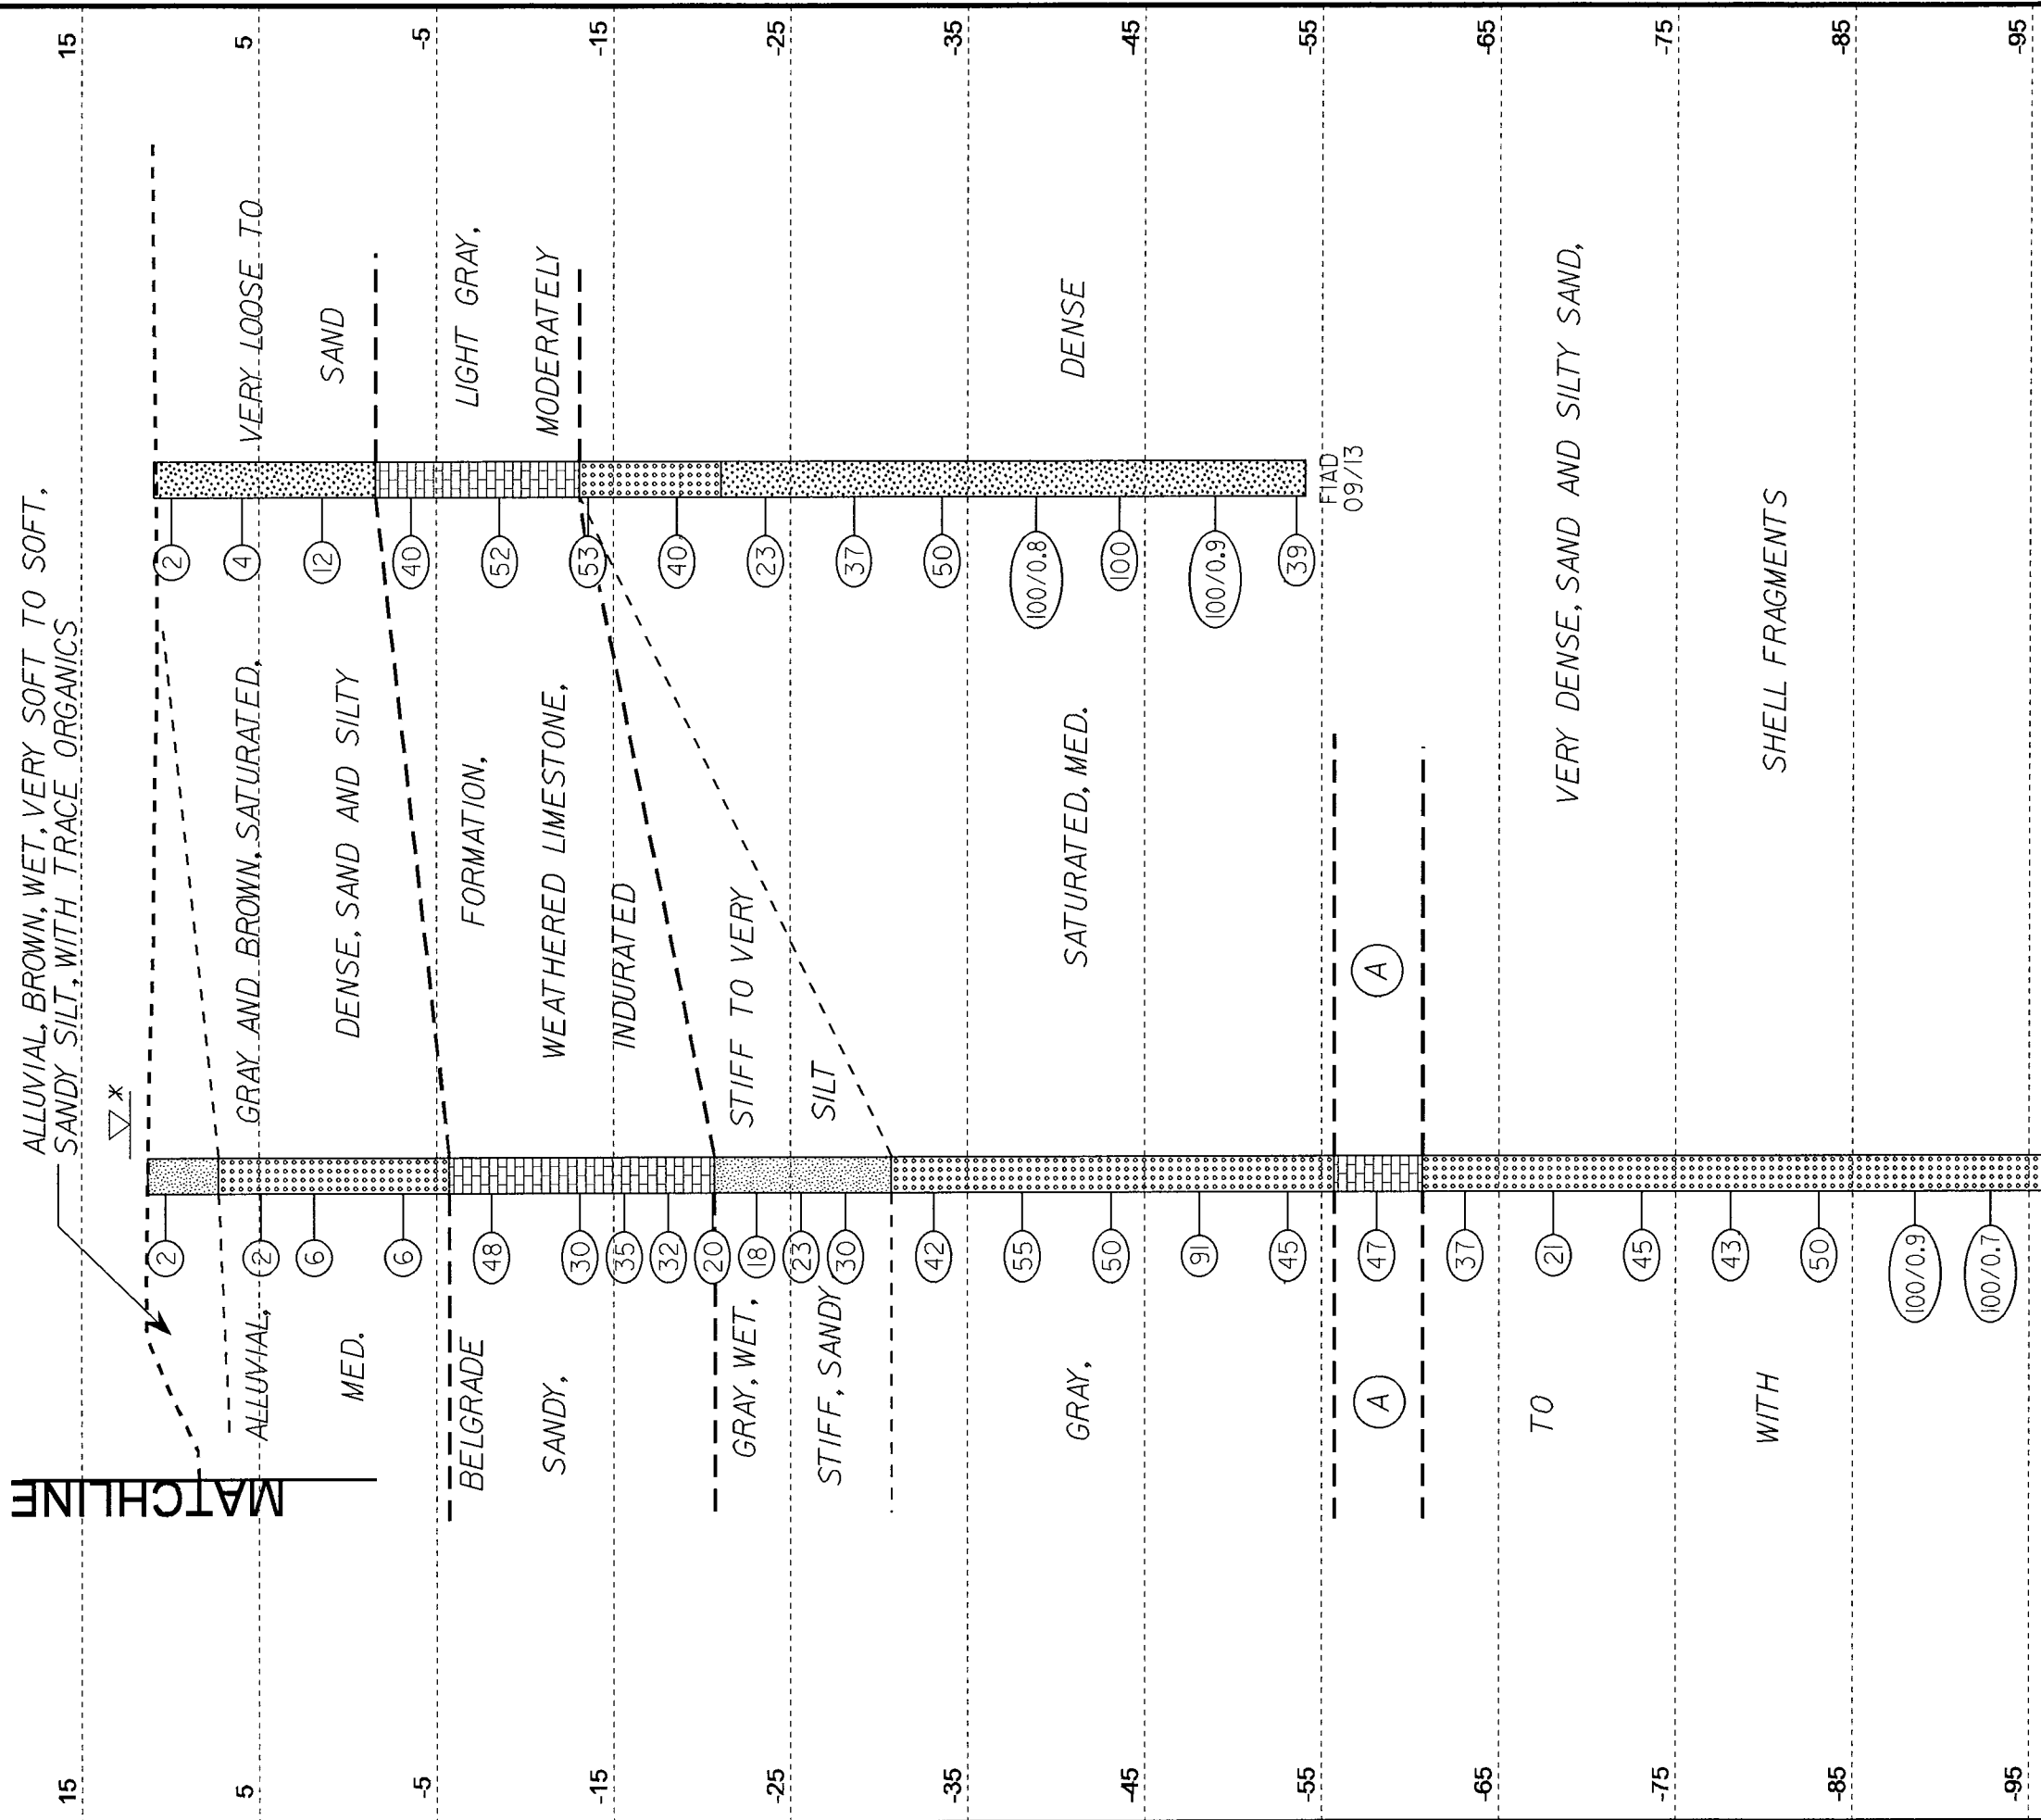


VE = 1:1

CROSS SECTION THROUGH BENT 2


SKEW=90°

(A) LIGHT GRAY, SANDY, WEATHERED LIMESTONE, MODERATELY INDURATED

* ARTESIAN

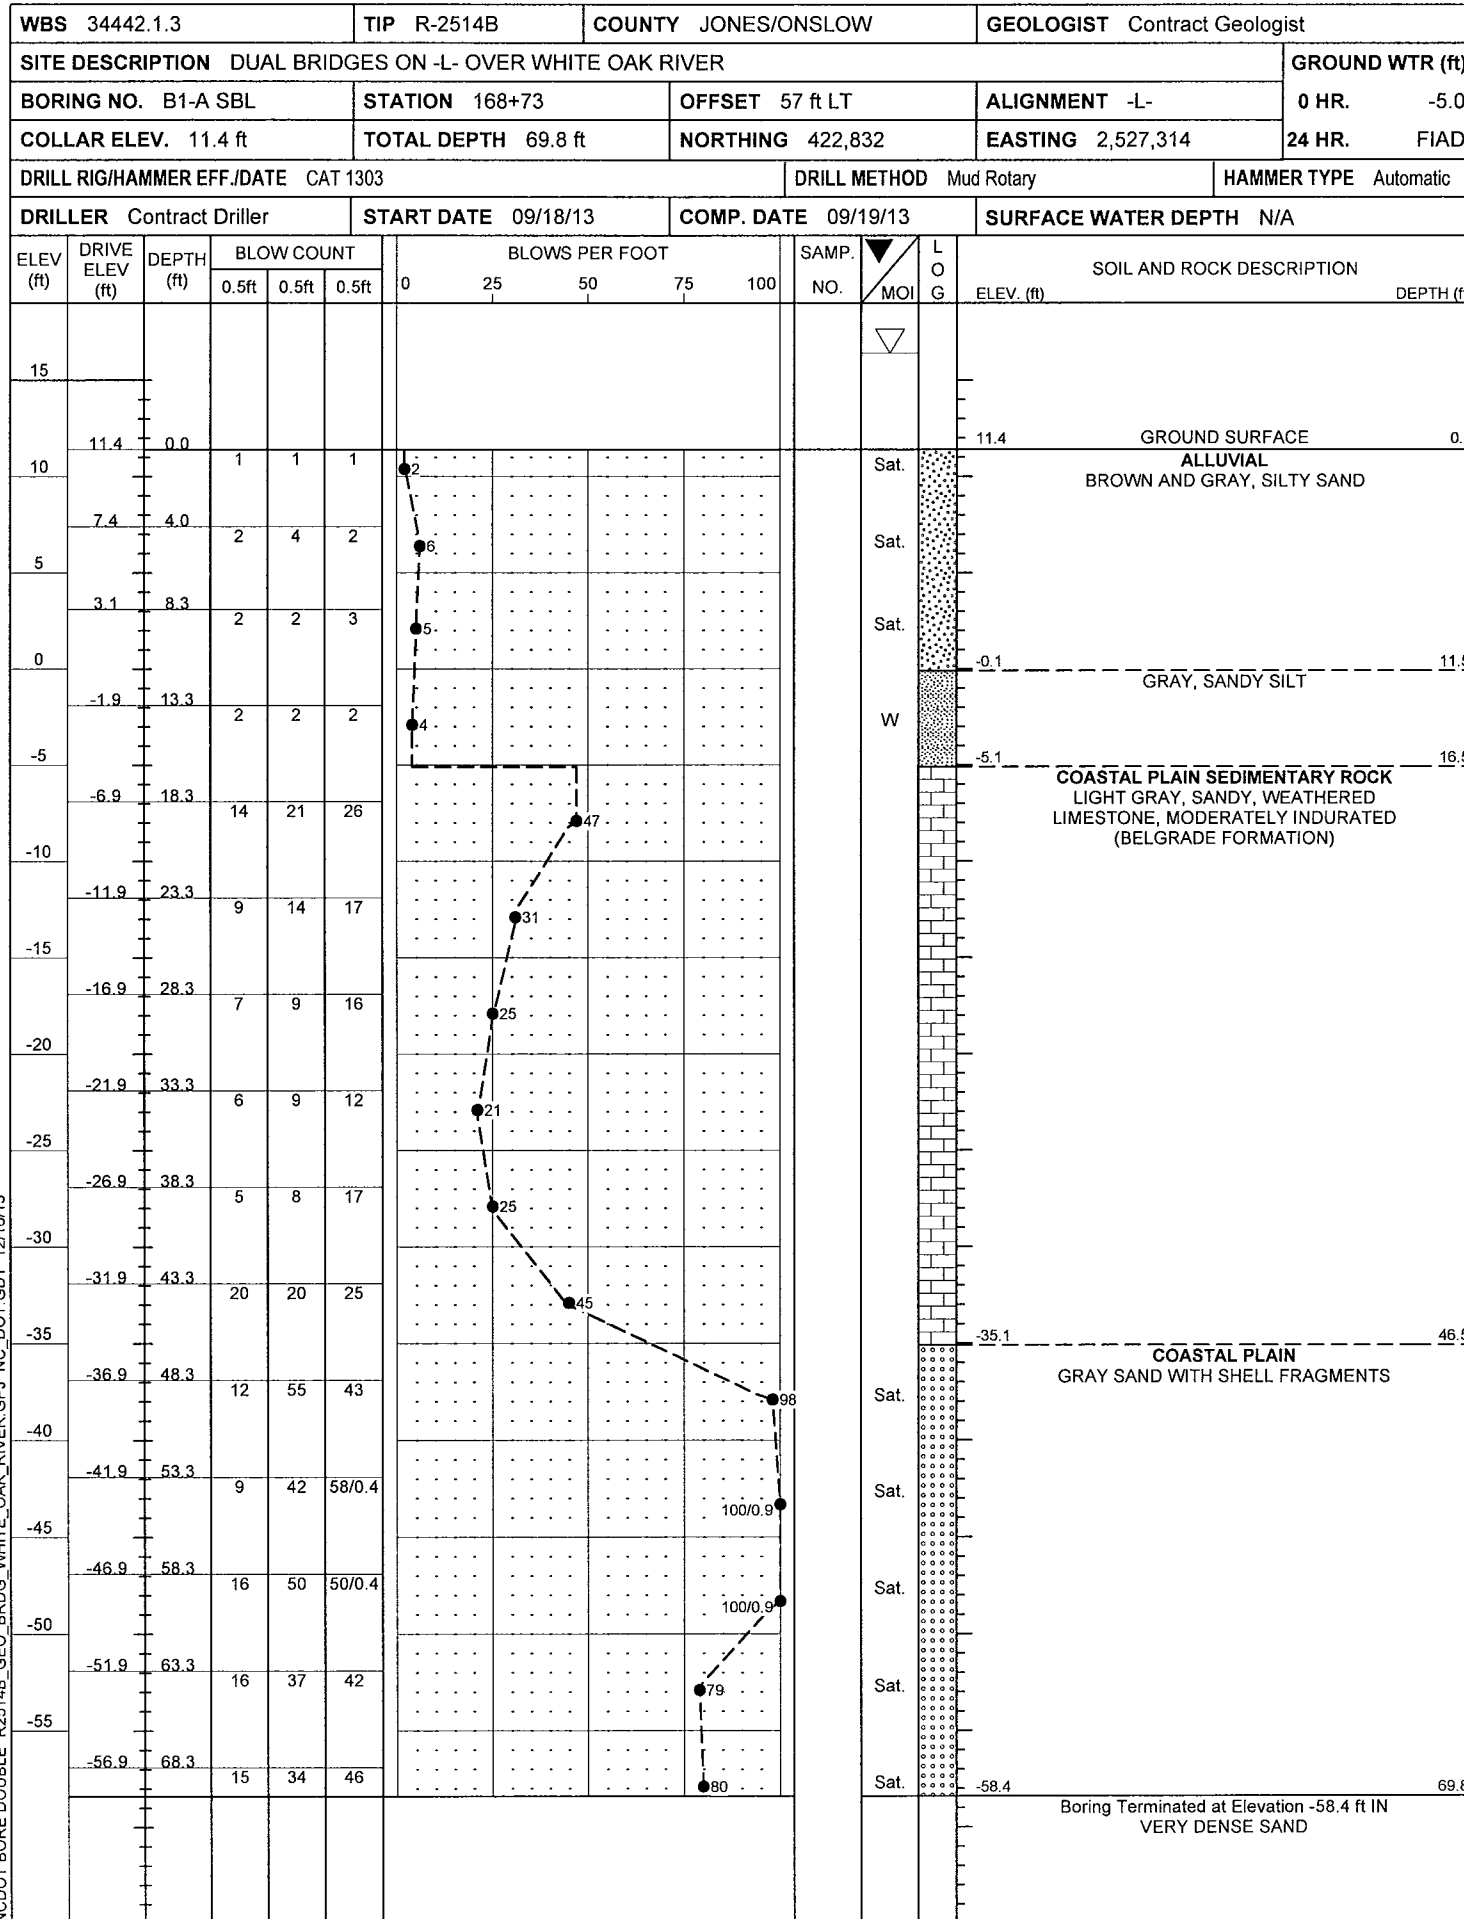



NCDOT BORE DOUBLE R2514B_GEO_BRDG_WHITE_OAK_RIVER.GPJ_NC_DOT_GDT_12/16/13

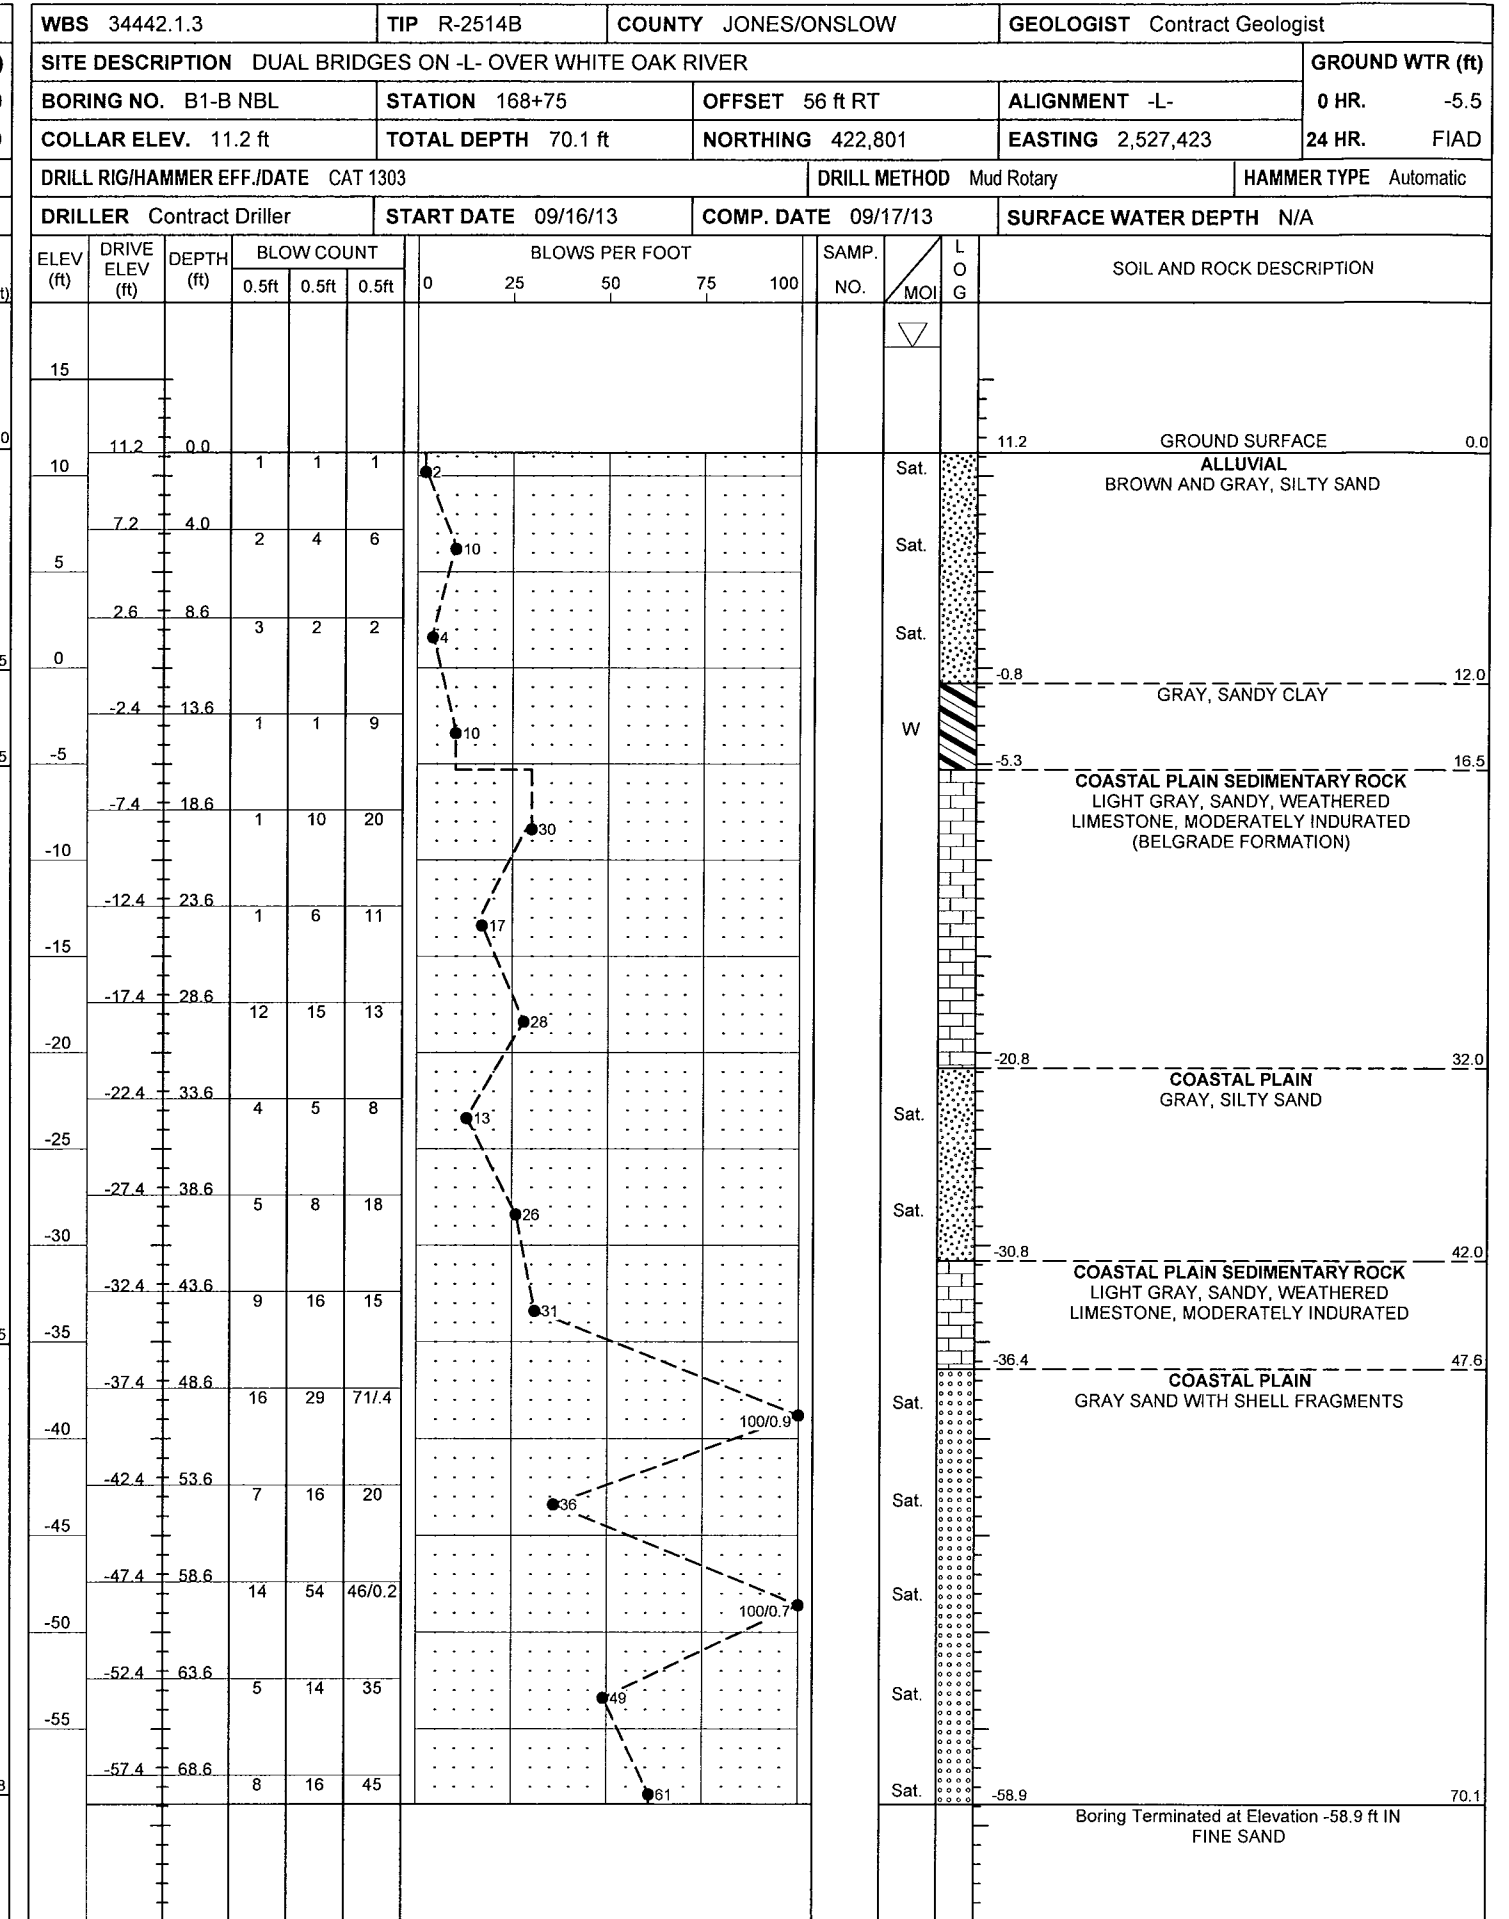

NCDOT GEOTECHNICAL ENGINEERING UNIT
BORELOG REPORT



WBS 34442.1.3	TIP R-2514B	COUNTY JONES/ONSLow	GEOLOGIST Contract Geologist	
SITE DESCRIPTION DUAL BRIDGES ON -L- OVER WHITE OAK RIVER				GROUND WTR (ft)
BORING NO. B2-A NBL	STATION 169+77	OFFSET 17 ft RT	ALIGNMENT -L-	0 HR. -1.0
COLLAR ELEV. 11.3 ft	TOTAL DEPTH 119.9 ft	NORTHING 422,911	EASTING 2,527,415	24 HR. FIAD
DRILL RIG/HAMMER EFF./DATE CAT 1303		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic	
DRILLER Contract Driller	START DATE 11/13/13	COMP. DATE 11/14/13	SURFACE WATER DEPTH N/A	

WBS 34442.1.3	TIP R-2514B	COUNTY JONES/ONSLow	GEOLOGIST Contract Geologist	
SITE DESCRIPTION DUAL BRIDGES ON -L- OVER WHITE OAK RIVER				GROUND WTR (ft)
BORING NO. B2-A NBL	STATION 169+77	OFFSET 17 ft RT	ALIGNMENT -L-	0 HR. -1.0
COLLAR ELEV. 11.3 ft	TOTAL DEPTH 119.9 ft	NORTHING 422,911	EASTING 2,527,415	24 HR. FIAD
DRILL RIG/HAMMER EFF./DATE CAT 1303		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic	
DRILLER Contract Driller	START DATE 11/13/13	COMP. DATE 11/14/13	SURFACE WATER DEPTH N/A	

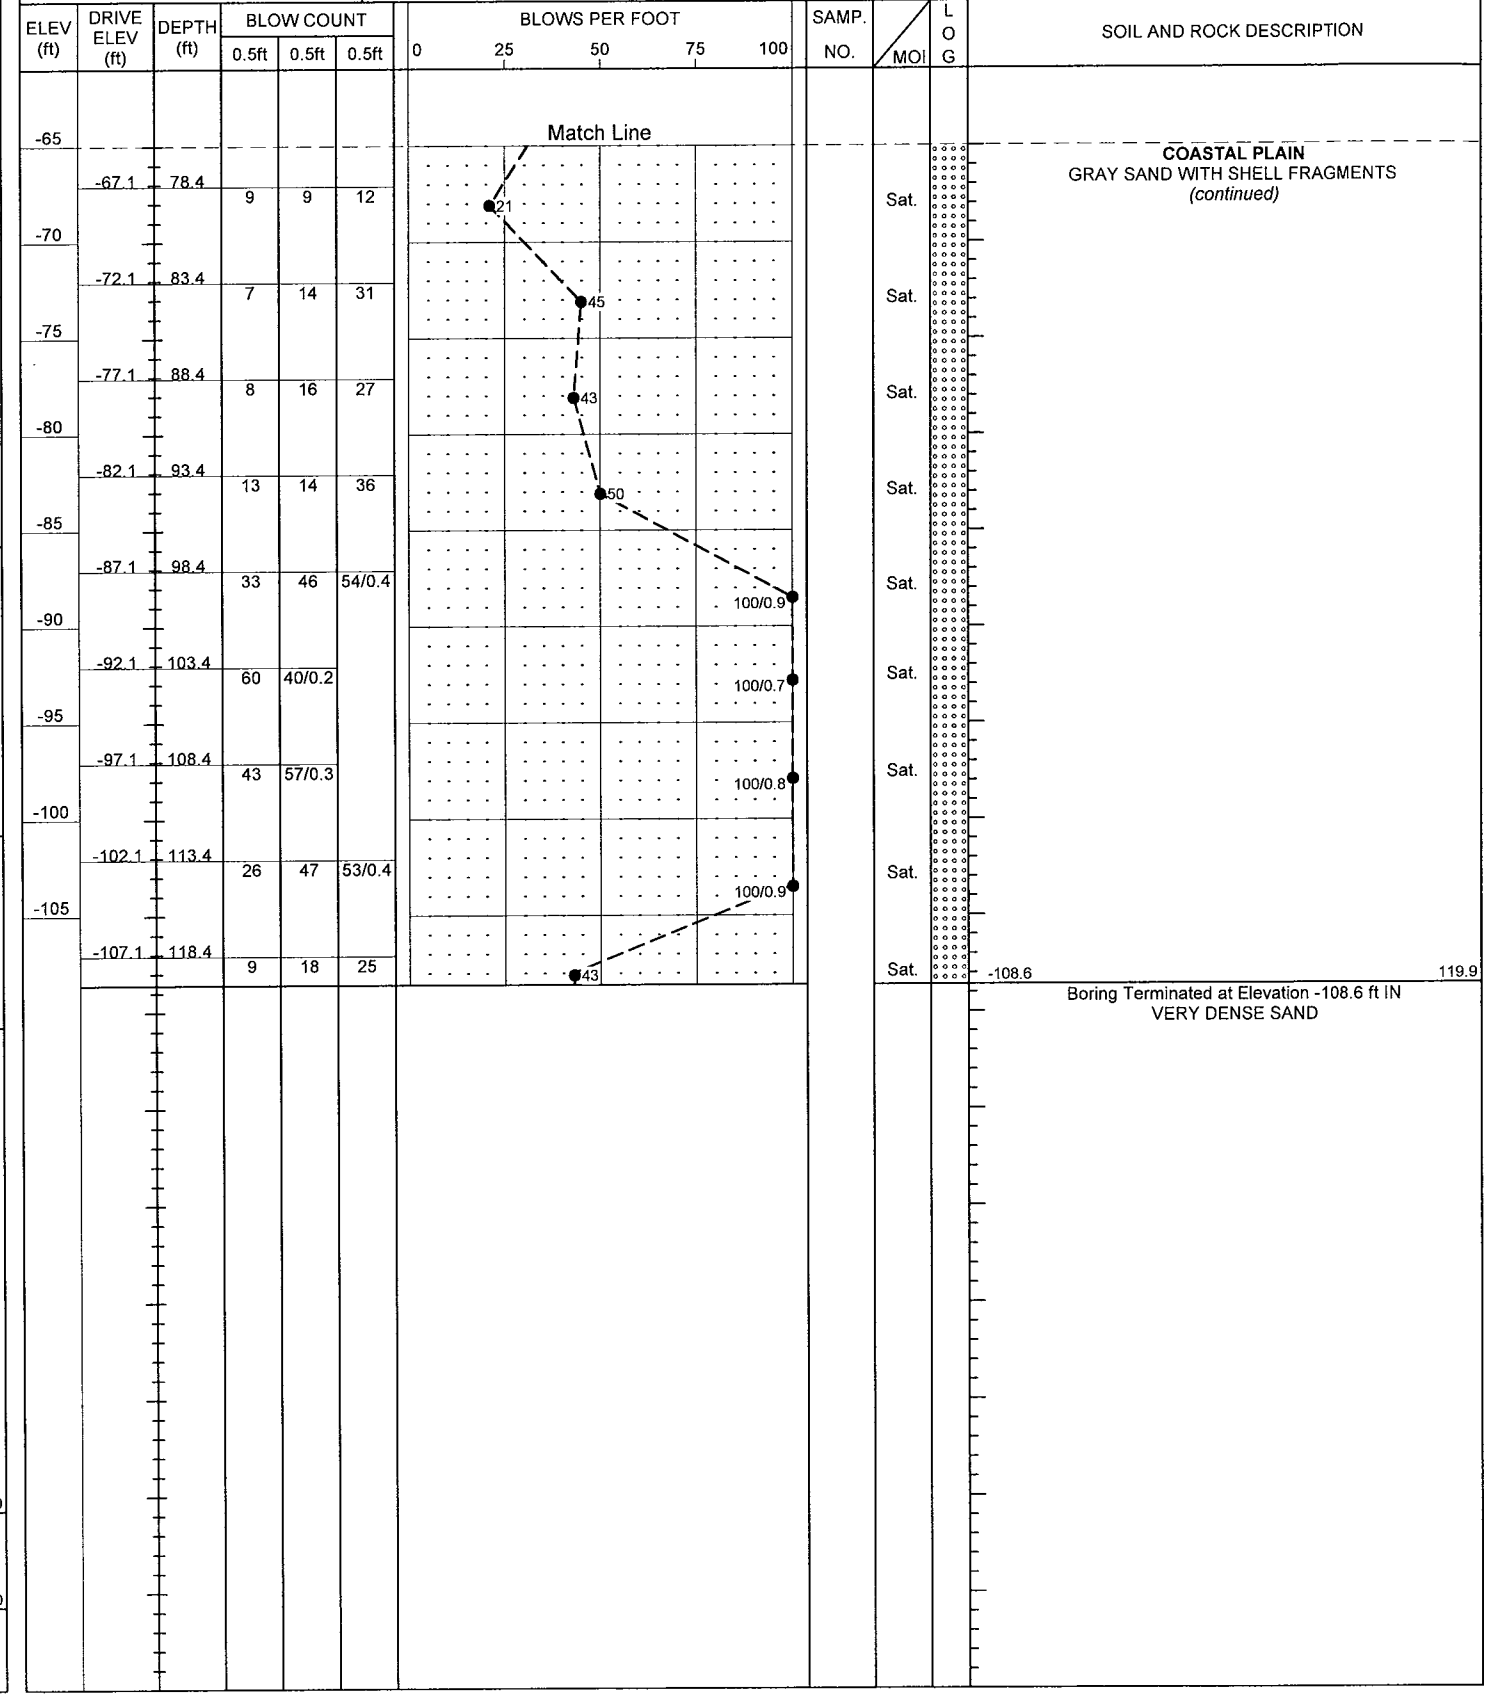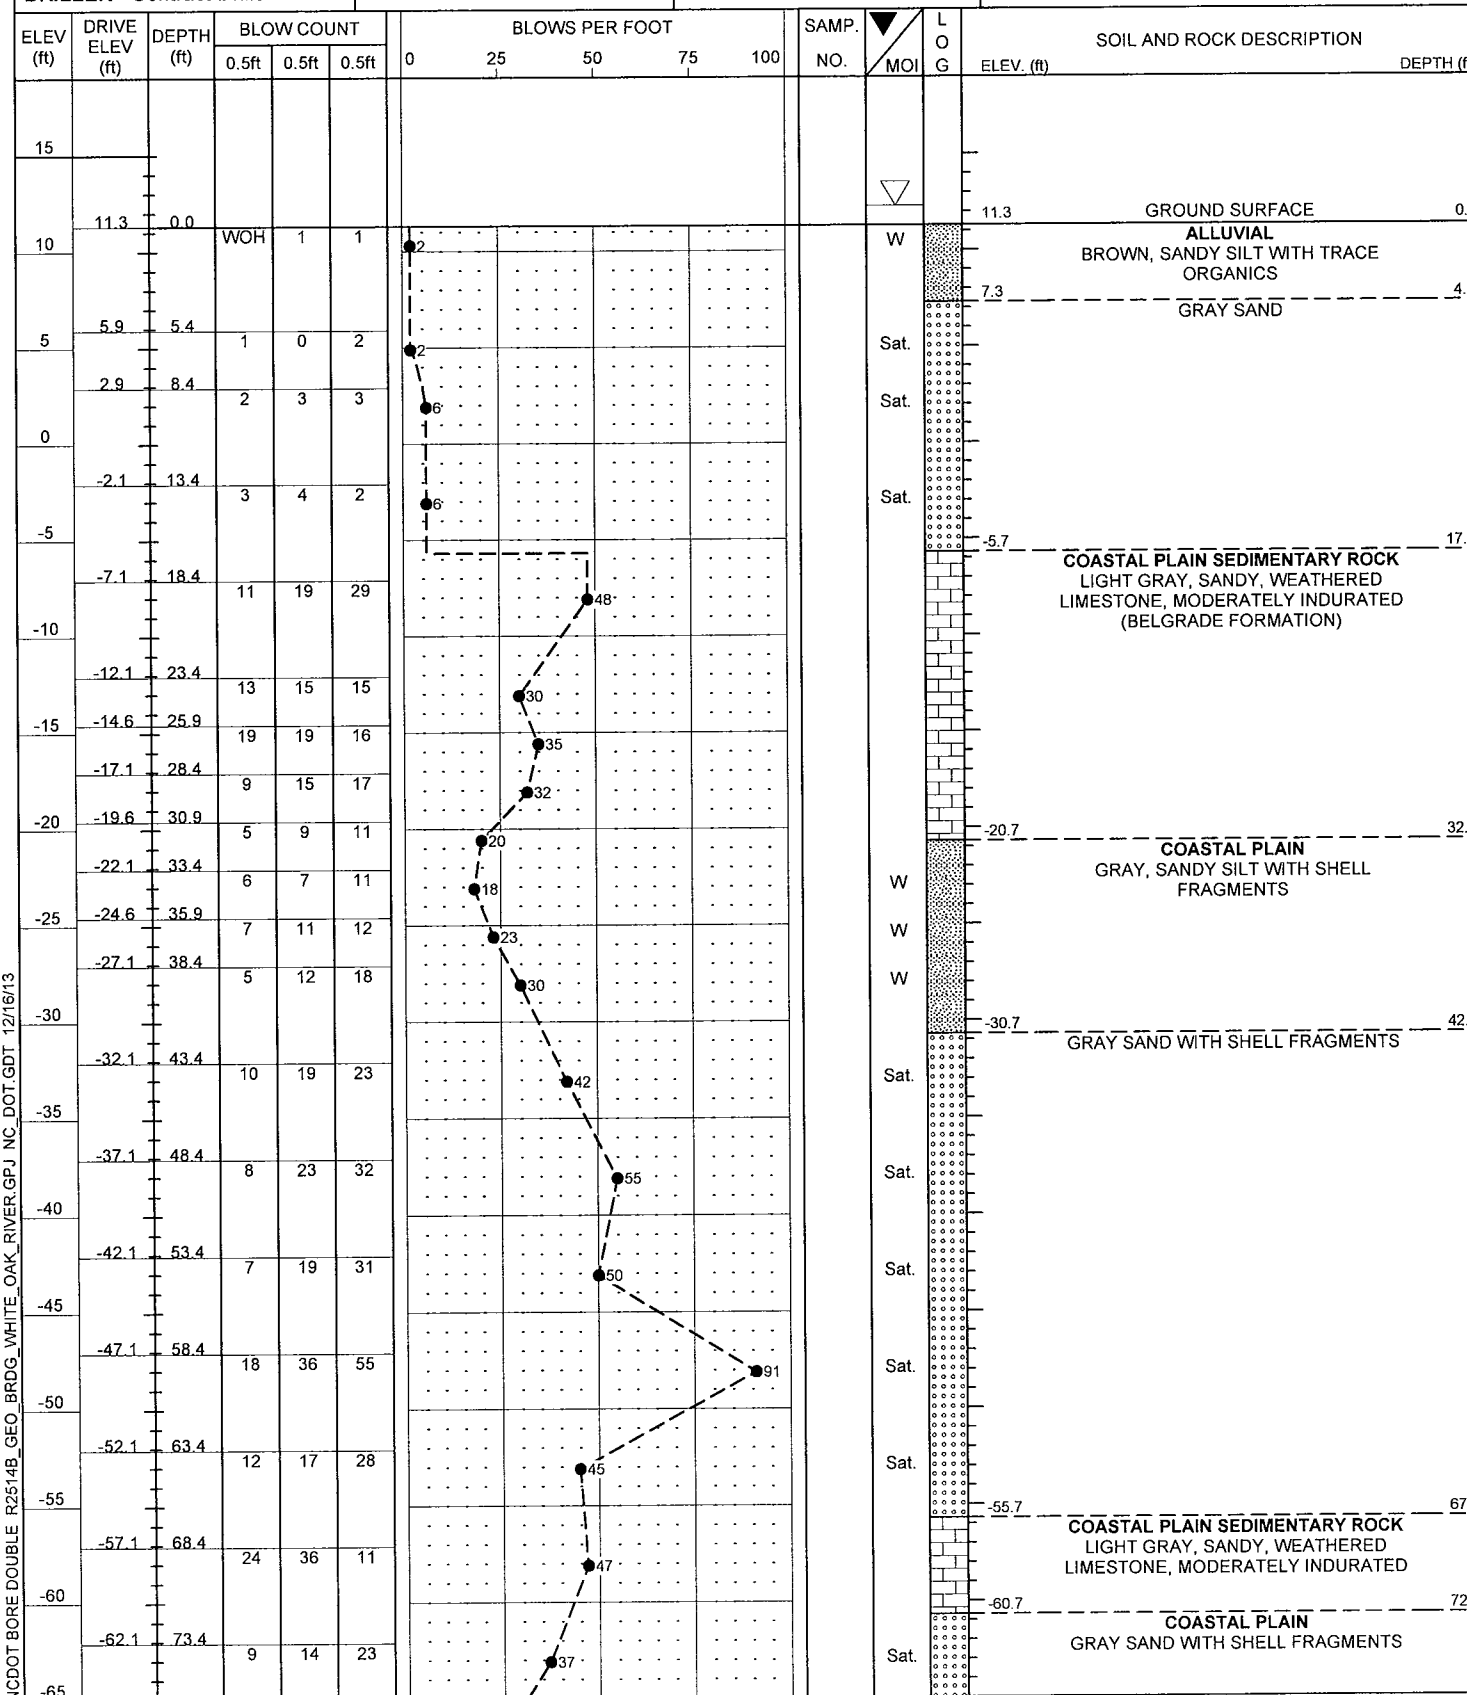

NCDOT BORE DOUBLE R2514B_GEO_BRD_WHITE_OAK_RIVER.GPJ NC_DOT_GDT 12/16/13

NCDOT GEOTECHNICAL ENGINEERING UNIT
BORELOG REPORT

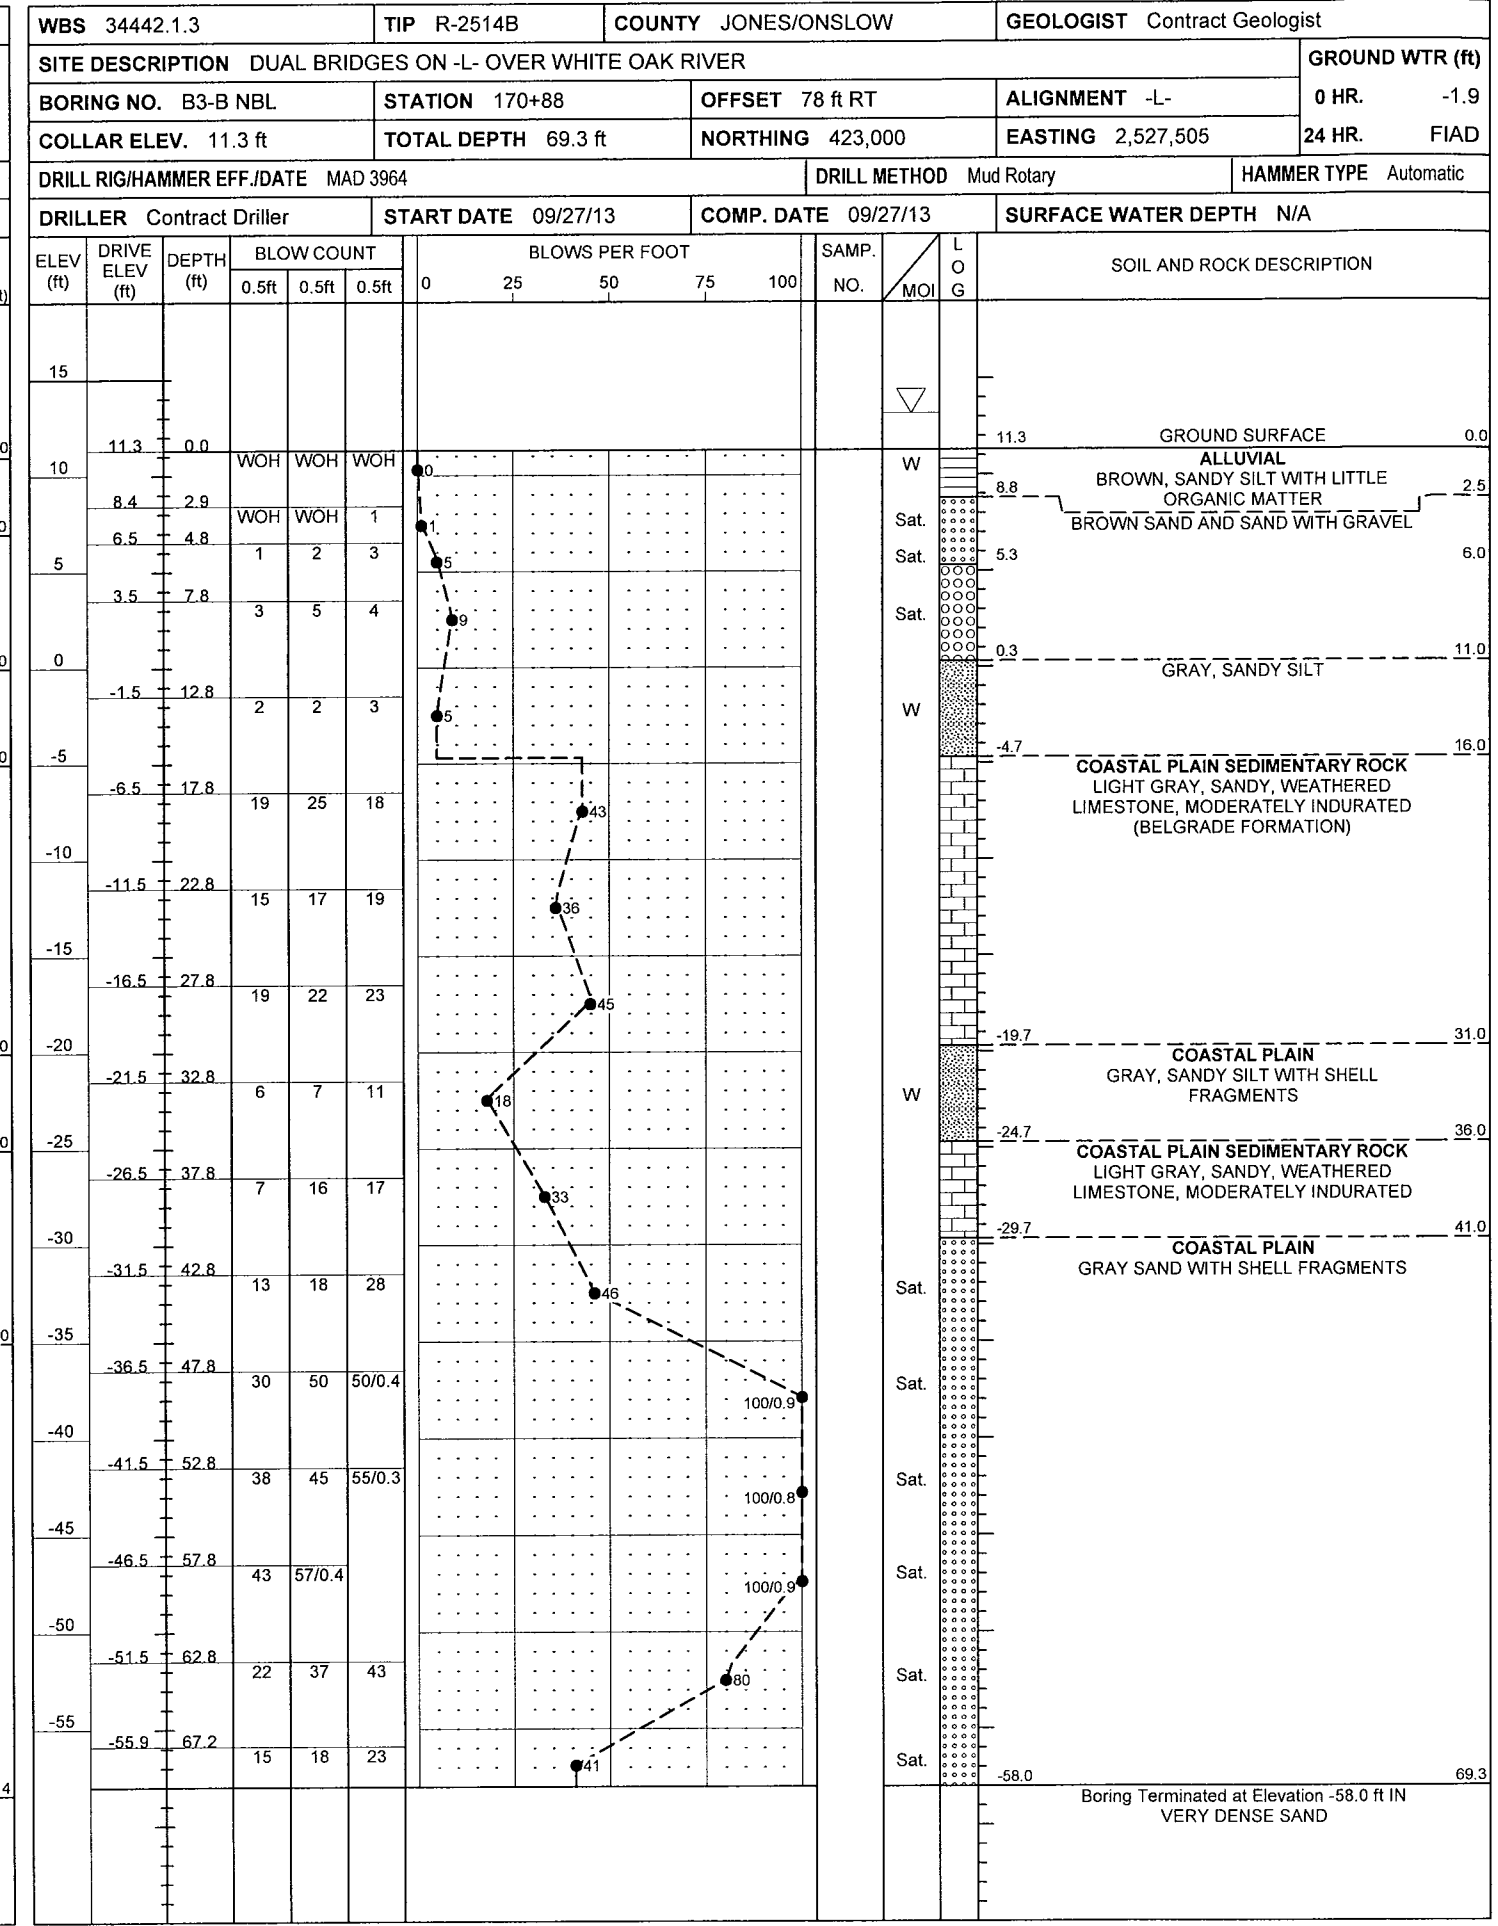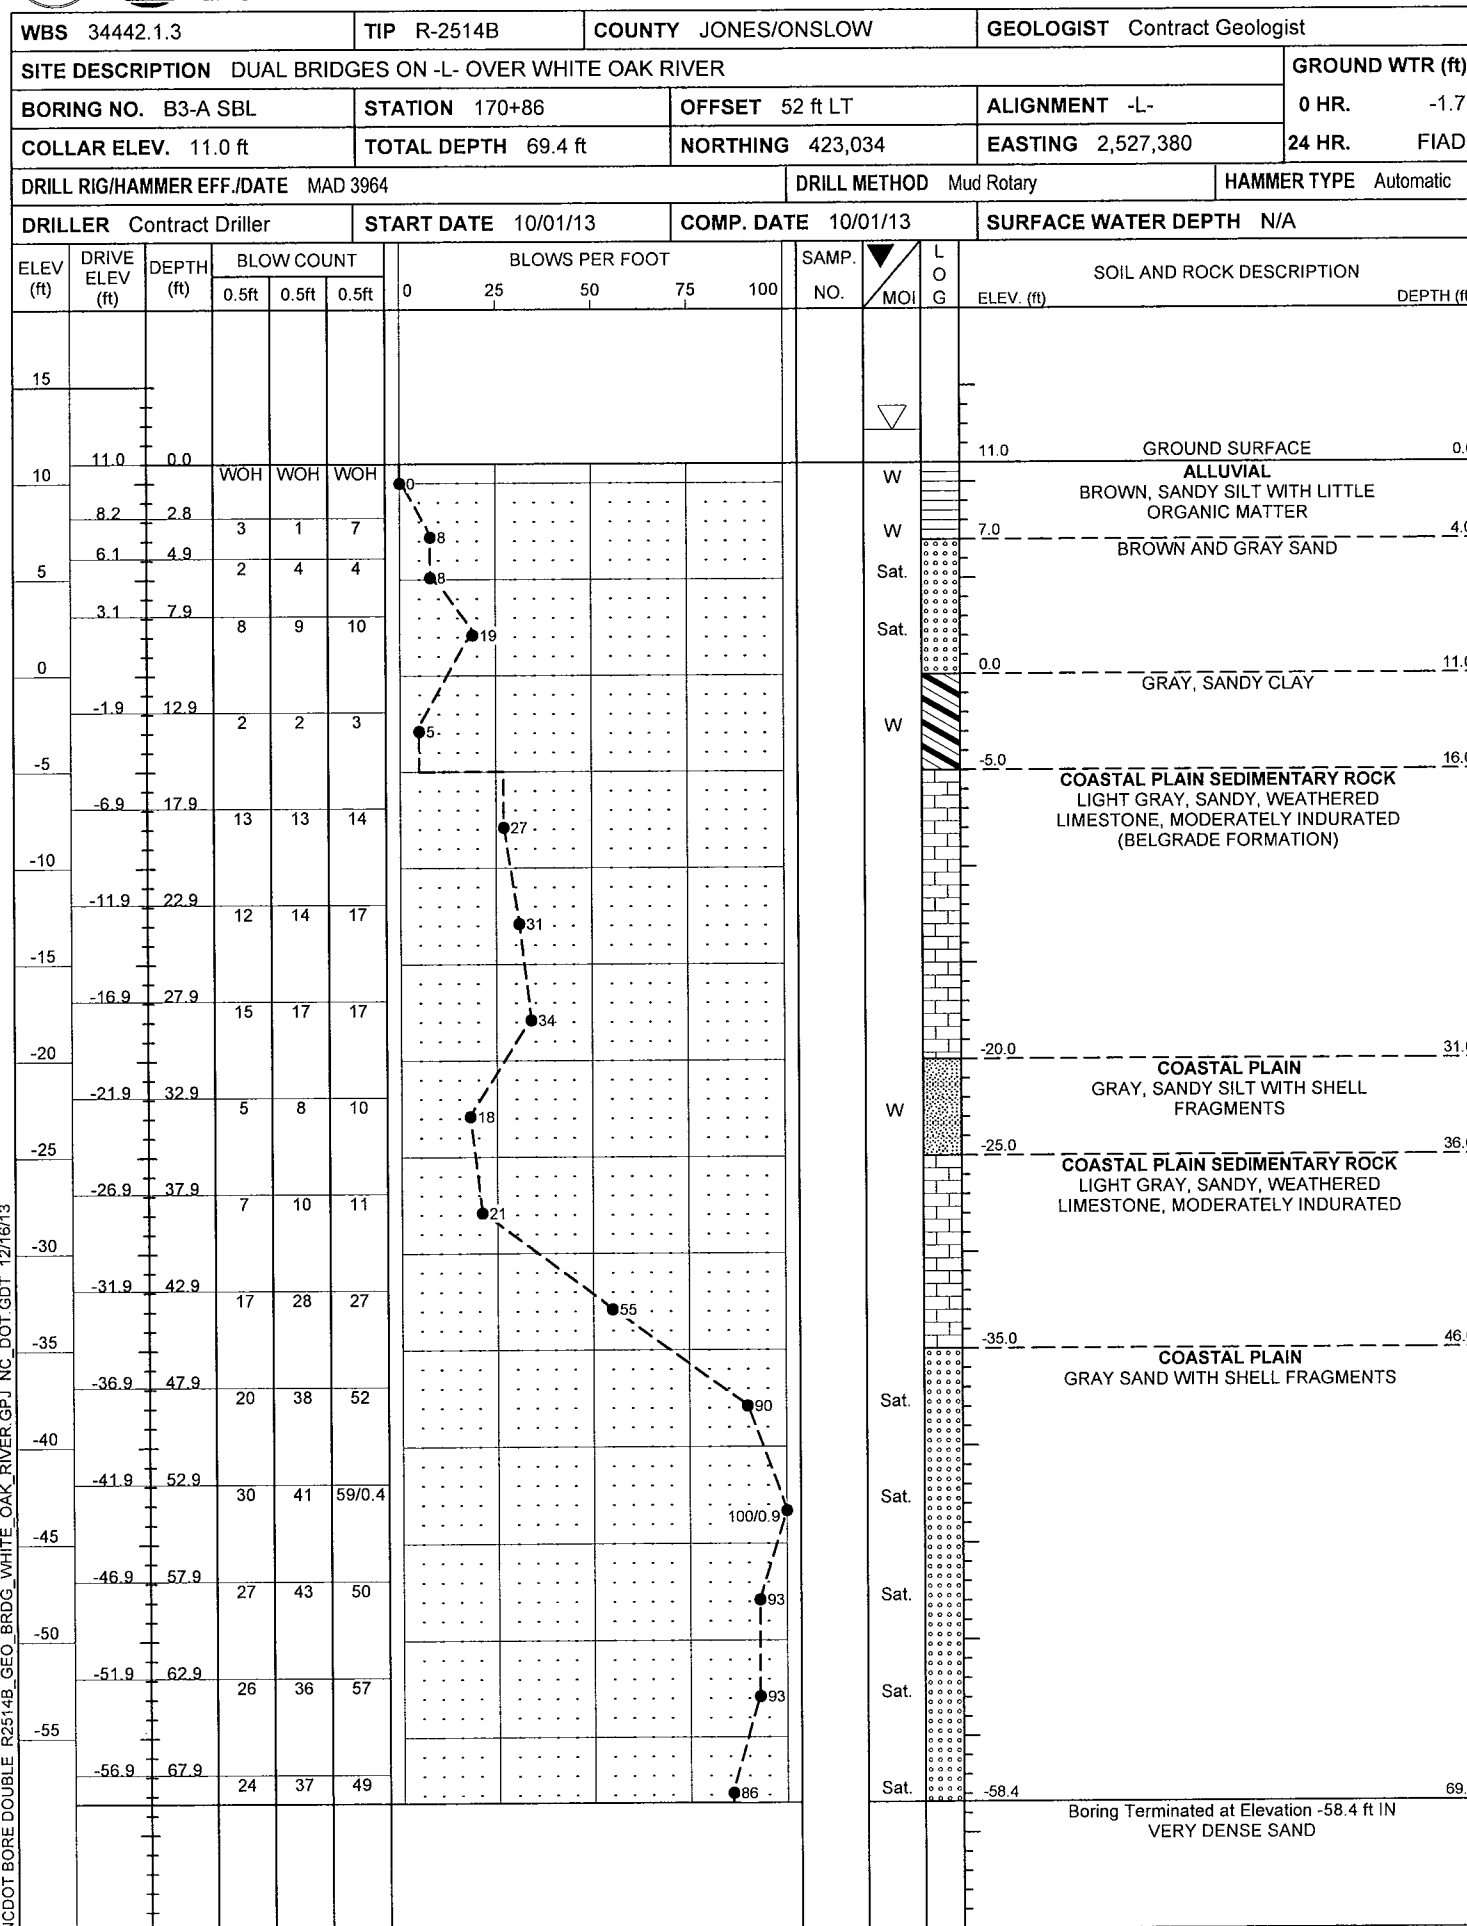



NCDOT BORE DOUBLE R2514B GEO_BRDG_WHITE_OAK_RIVER.GPJ NC_DOT_GDT_12/16/13

NCDOT GEOTECHNICAL ENGINEERING UNIT
BORELOG REPORT

WBS 34442.1.3		TIP R-2514B		COUNTY JONES/ONSLAW		GEOLOGIST Contract Geologist										
SITE DESCRIPTION DUAL BRIDGES ON -L- OVER WHITE OAK RIVER						GROUND WTR (ft)										
BORING NO. B4-A SBL		STATION 171+90		OFFSET 50 ft LT		ALIGNMENT -L-										
COLLAR ELEV. 11.2 ft		TOTAL DEPTH 74.2 ft		NORTHING 423,133		EASTING 2,527,410										
DRILL RIG/HAMMER EFF./DATE MAD 3964				DRILL METHOD Mud Rotary		HAMMER TYPE Automatic										
DRILLER Contract Driller		START DATE 10/02/13		COMP. DATE 10/02/13		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
15																
10	11.2	0.0	WOH	WOH	WOH										11.2	GROUND SURFACE
	8.4	2.8	WOH	WOH	WOH										7.2	ALLUVIAL BROWN, SANDY SILT WITH LITTLE ORGANIC MATTER
	6.5	4.7	2	2	4											GRAY SAND
5	3.5	7.7	8	11	14											
0	-1.5	12.7	4	7	9										0.2	GRAY, SANDY CLAY AND SILT
-5	-6.0	17.2	2	2	2										-1.8	
-10	-11.5	22.7	2	5	14										-8.3	COASTAL PLAIN SEDIMENTARY ROCK LIGHT GRAY, SANDY, WEATHERED LIMESTONE, MODERATELY INDURATED (BELGRADE FORMATION)
-15	-16.5	27.7	15	14	16											
-20	-21.5	32.7	6	7	9										-19.8	COASTAL PLAIN GRAY, SANDY SILT WITH SHELL FRAGMENTS
-25	-26.5	37.7	6	10	15											
-30	-31.5	42.7	23	23	43										-29.8	COASTAL PLAIN SEDIMENTARY ROCK LIGHT GRAY, SANDY, WEATHERED LIMESTONE, MODERATELY INDURATED
-35	-36.5	47.7	41	54	46/0.4										-34.8	COASTAL PLAIN GRAY SAND WITH SHELL FRAGMENTS
-40	-41.5	52.7	34	44	56/0.4											
-45	-46.5	57.7	37	61	39/0.2											
-50	-51.5	62.7	41	51	49/0.2											
-55	-56.5	67.7	30	29	25										-54.8	COASTAL PLAIN SEDIMENTARY ROCK LIGHT GRAY, SANDY, WEATHERED LIMESTONE, MODERATELY INDURATED
-60	-61.5	72.7	18	23	33										-59.8	COASTAL PLAIN GRAY SAND WITH SHELL FRAGMENTS
															-63.0	Boring Terminated at Elevation -63.0 ft IN VERY DENSE SAND

WBS 34442.1.3		TIP R-2514B		COUNTY JONES/ONSLAW		GEOLOGIST Contract Geologist										
SITE DESCRIPTION DUAL BRIDGES ON -L- OVER WHITE OAK RIVER						GROUND WTR (ft)										
BORING NO. B4-B NBL		STATION 171+91		OFFSET 54 ft RT		ALIGNMENT -L-										
COLLAR ELEV. 11.1 ft		TOTAL DEPTH 74.4 ft		NORTHING 423,106		EASTING 2,527,510										
DRILL RIG/HAMMER EFF./DATE MAD 3964				DRILL METHOD Mud Rotary		HAMMER TYPE Automatic										
DRILLER Contract Driller		START DATE 09/26/13		COMP. DATE 09/26/13		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
15																
10	11.1	0.0	WOH	WOH	WOH										11.1	GROUND SURFACE
	6.4	4.7	3	3	4										7.1	ALLUVIAL GRAY AND BROWN, SANDY SILT WITH LITTLE ORGANIC MATTER
5	3.2	7.9	6	8	9										4.1	GRAY SAND, SAND WITH GRAVEL, AND CLAYEY SAND
0	-1.8	12.9	2	2	2										0.1	
-5	-6.8	17.9	4	12	25										-7.4	COASTAL PLAIN SEDIMENTARY ROCK LIGHT GRAY, SANDY, WEATHERED LIMESTONE, MODERATELY INDURATED (BELGRADE FORMATION)
-10	-11.8	22.9	14	14	23											
-15	-16.8	27.9	18	20	17											
-20	-21.8	32.9	5	8	12										-19.9	COASTAL PLAIN GRAY, SANDY SILT WITH SHELL FRAGMENTS
-25	-26.8	37.9	9	11	40											
-30	-31.8	42.9	19	35	40										-29.9	COASTAL PLAIN GRAY SAND WITH SHELL FRAGMENTS
-35	-36.8	47.9	34	48	52											
-40	-41.8	52.9	35	63	37/0.2											
-45	-46.8	57.9	27	43	57/0.3											
-50	-51.8	62.9	27	56	44/0.3											
-55	-56.8	67.9	26	32	39										-54.8	COASTAL PLAIN SEDIMENTARY ROCK LIGHT GRAY, SANDY, WEATHERED LIMESTONE, MODERATELY INDURATED
-60	-61.8	72.9	25	35	42										-59.8	COASTAL PLAIN GRAY SAND WITH SHELL FRAGMENTS
															-63.3	Boring Terminated at Elevation -63.3 ft

NCDOT BORE DOUBLE R2514B_GEO_BRDG_WHITE_OAK_RIVER.GPJ NC_DOT_GDT_12/16/13

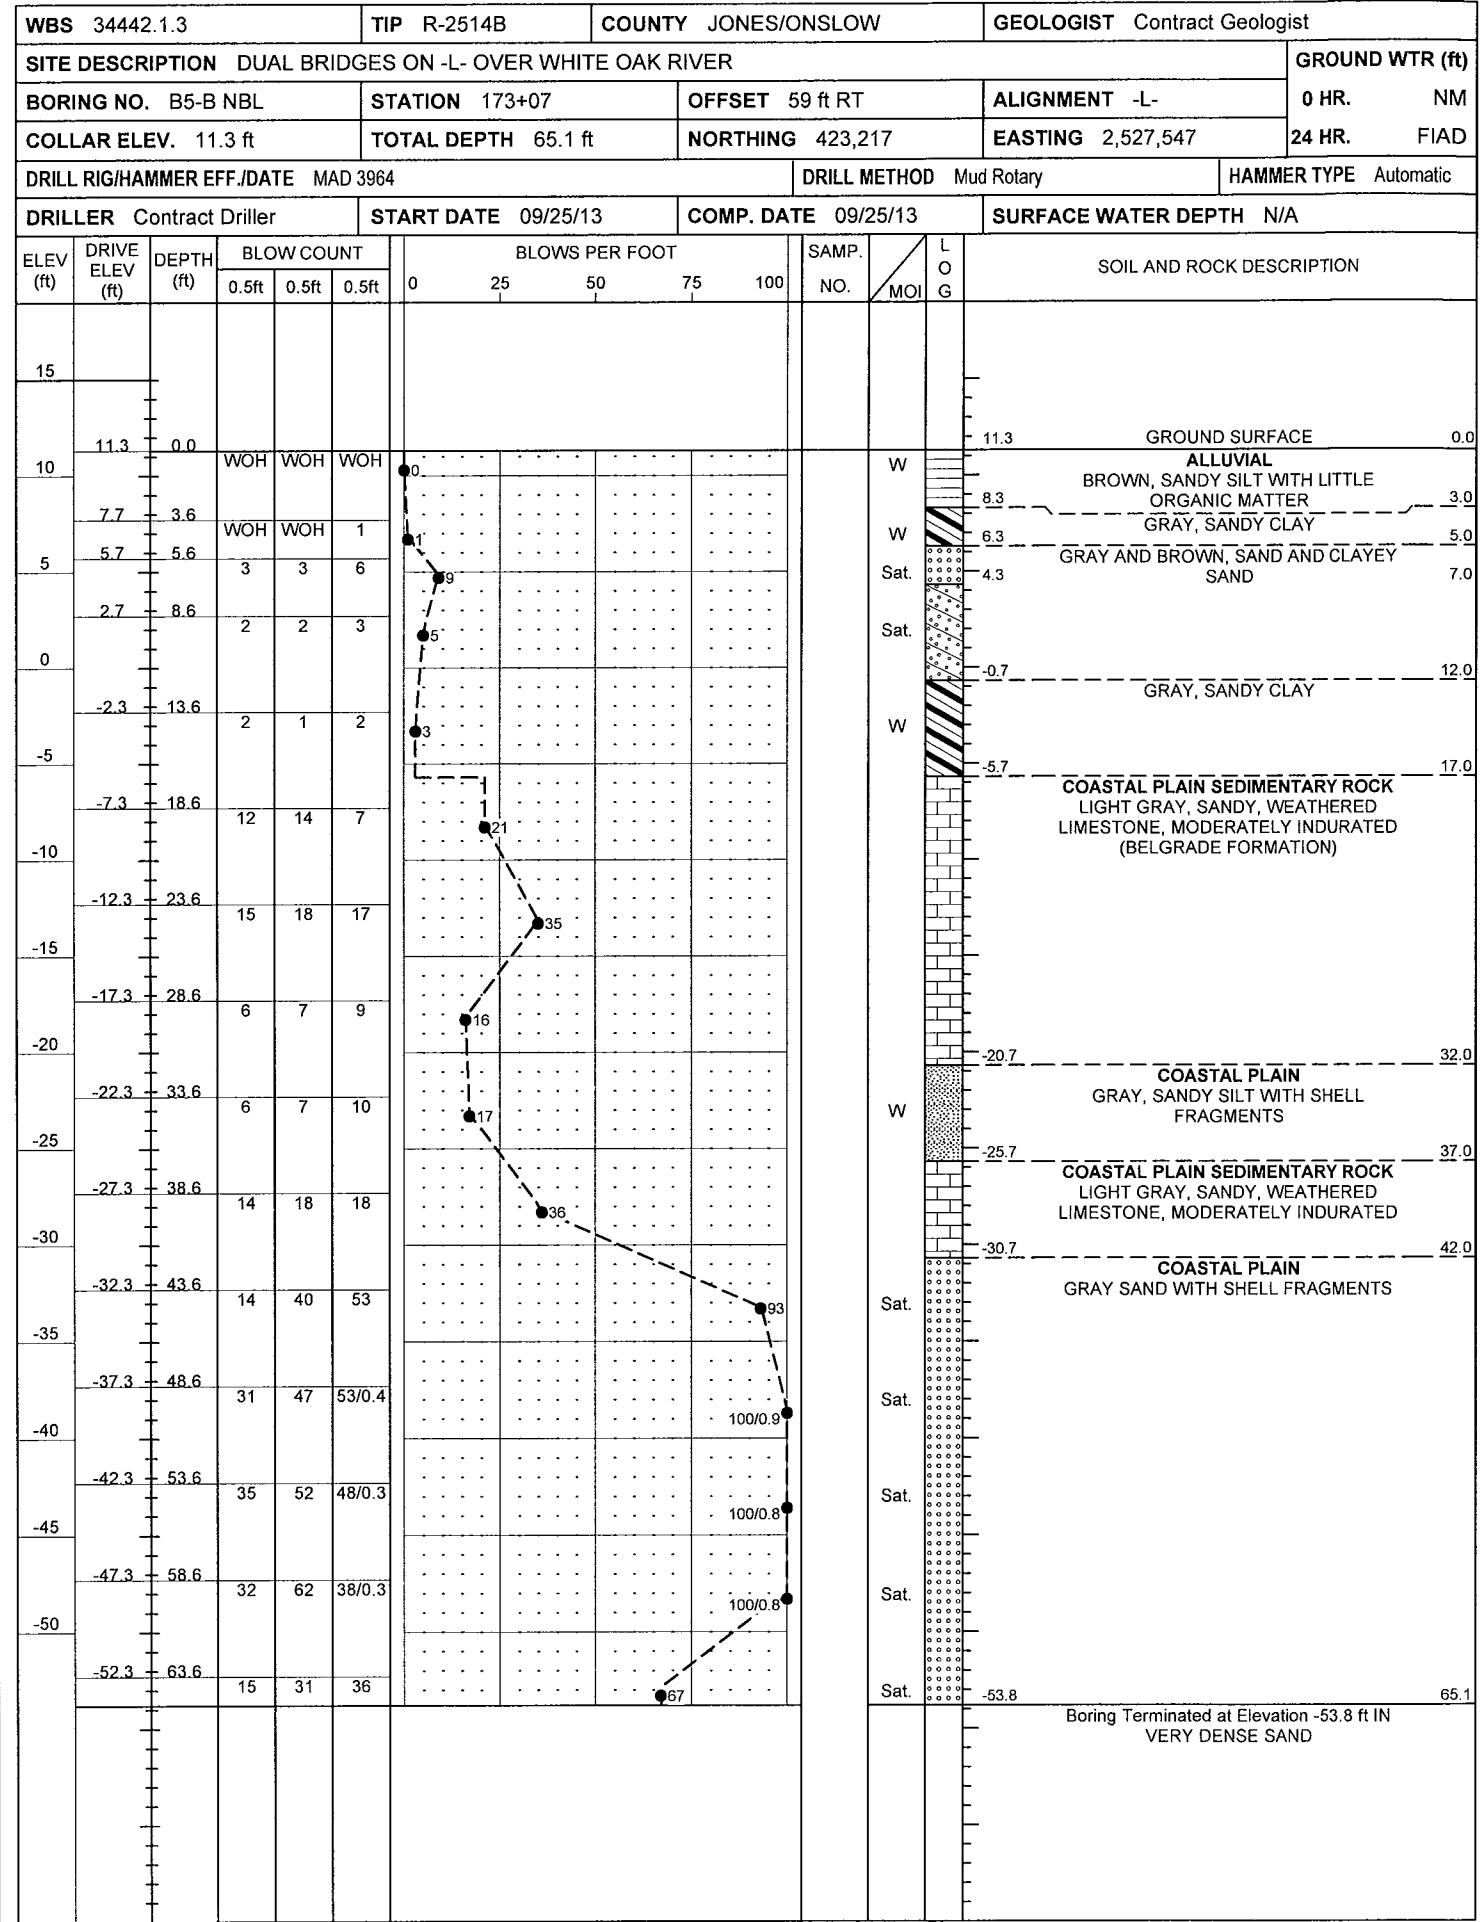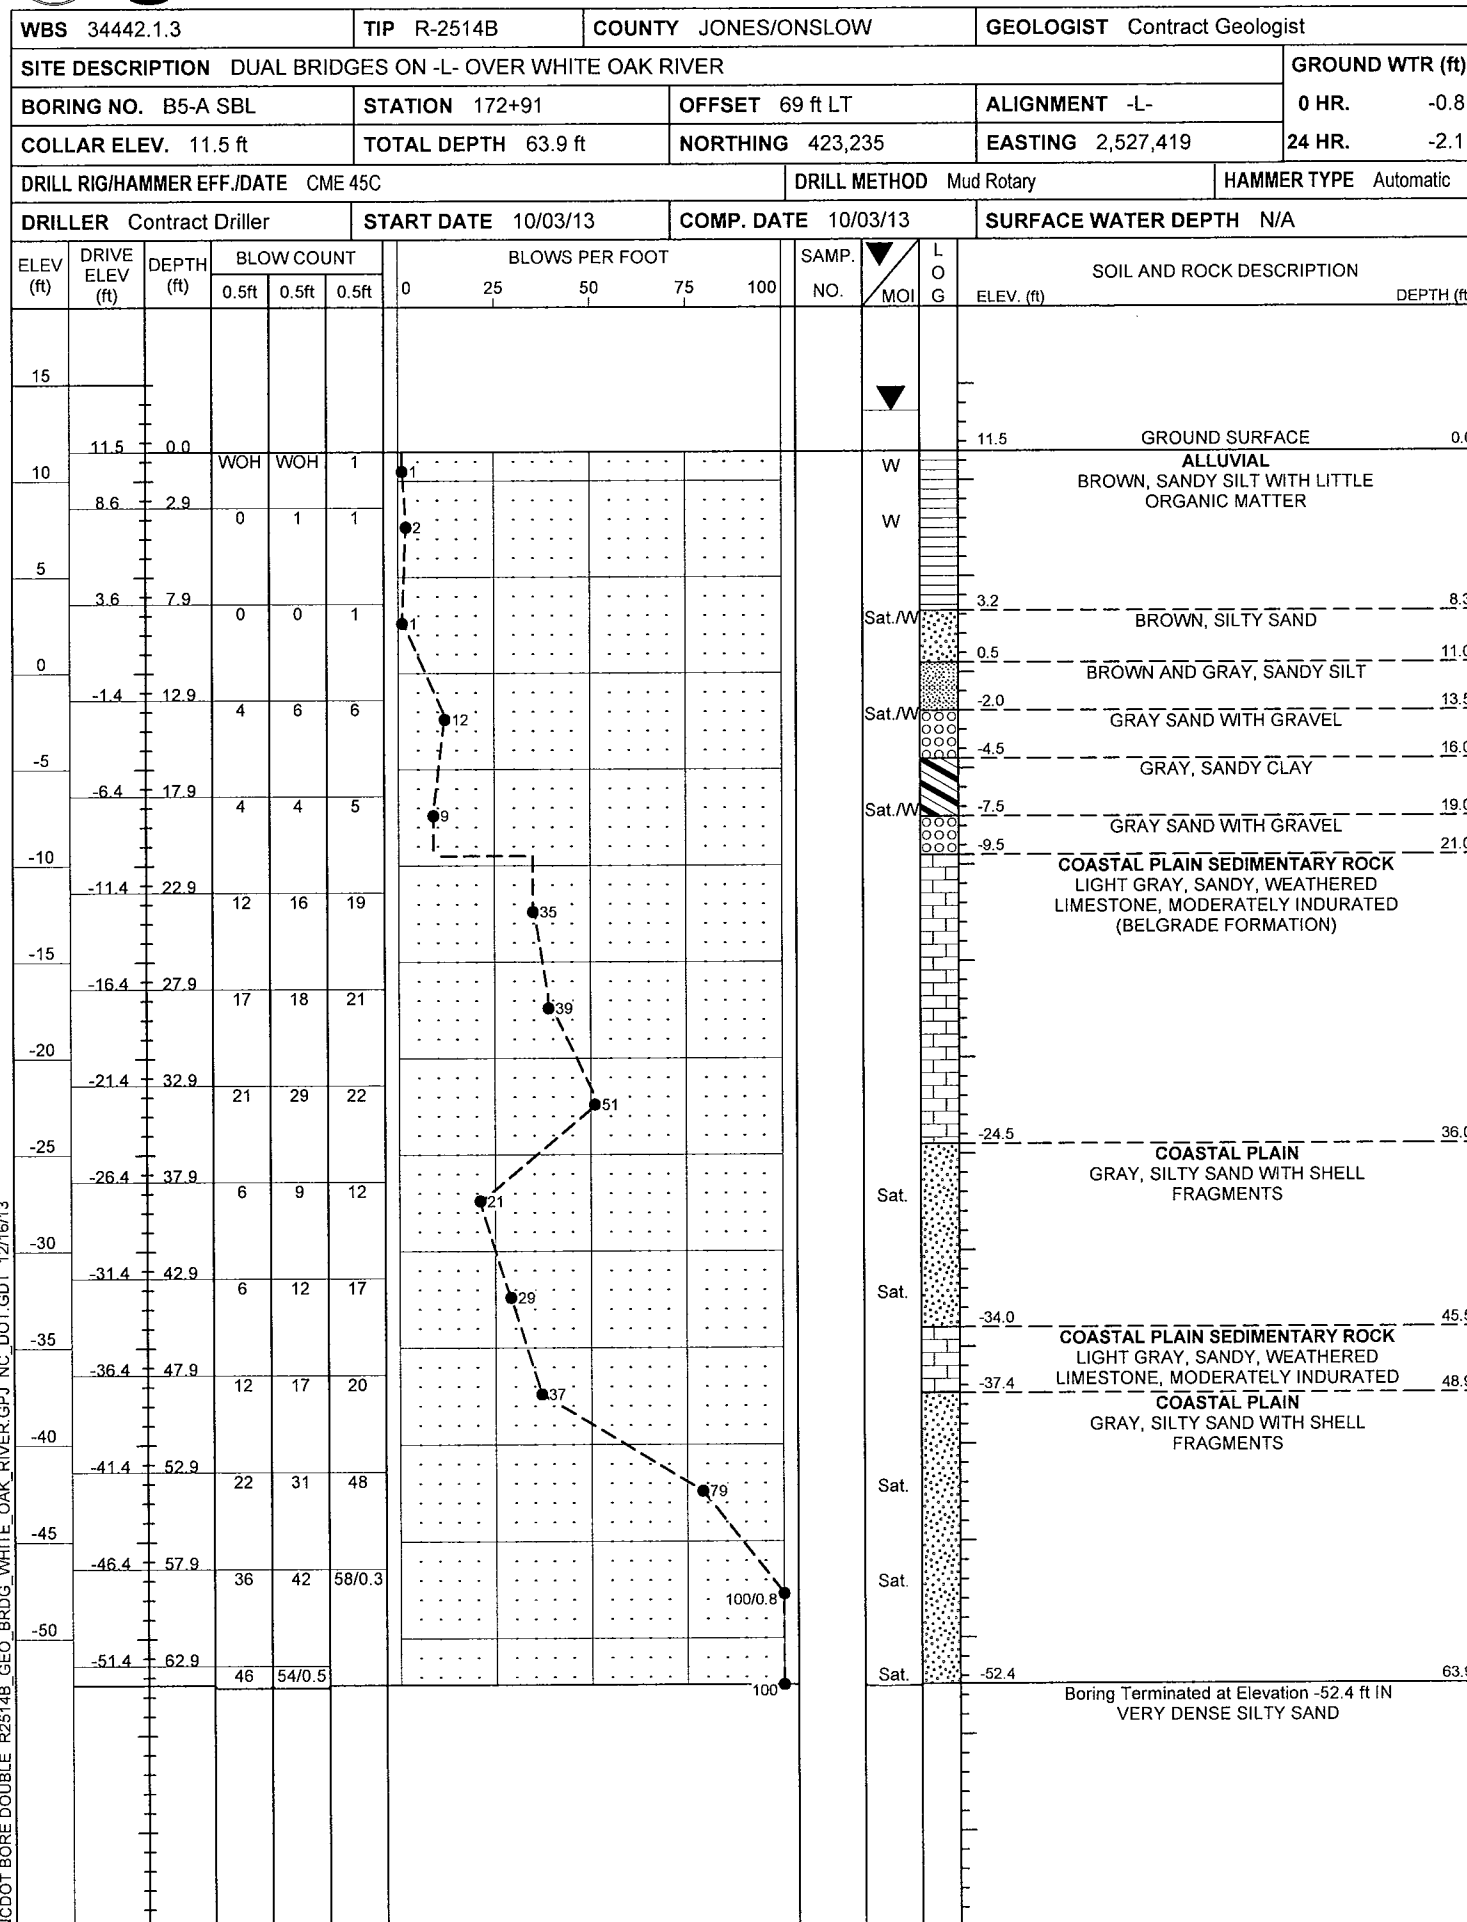

NCDOT BORE DOUBLE R2514B GEO BRDG WHITE OAK RIVER GPJ NC_DOT.GDT 12/16/13



NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

WBS 34442.1.3		TIP R-2514B		COUNTY JONES/ONSLAW		GEOLOGIST Contract Geologist									
SITE DESCRIPTION DUAL BRIDGES ON -L- OVER WHITE OAK RIVER							GROUND WTR (ft)								
BORING NO. B6-A SBL		STATION 174+02		OFFSET 63 ft LT		ALIGNMENT -L-									
COLLAR ELEV. 11.9 ft		TOTAL DEPTH 63.8 ft		NORTHING 423,340		EASTING 2,527,454									
DRILL RIG/HAMMER EFF./DATE MAD 3964		DRILL METHOD Mud Rotary		HAMMER TYPE Automatic											
DRILLER Contract Driller		START DATE 10/04/13		COMP. DATE 10/04/13		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
15	11.9	0.0											11.9	GROUND SURFACE	0.0
10	9.0	2.9	WOH	WOH	WOH							W	ALLUVIAL BROWN AND BLACK, SANDY SILT WITH LITTLE ORGANIC MATTER		
5	4.0	7.9	WOH	2	2							W	GRAY, SILTY SAND	7.0	
0	-1.0	12.9	3	3	4							Sat.			
-5	-6.0	17.9	3	3	4							Sat.			
-10	-11.0	22.9	20	22	39							Sat.	COASTAL PLAIN SEDIMENTARY ROCK LIGHT GRAY, SANDY, WEATHERED LIMESTONE, MODERATELY INDURATED (BELGRADE FORMATION)	19.5	
-15	-16.0	27.9	20	22	29							Sat.			
-20	-21.0	32.9	9	9	13							Sat.	COASTAL PLAIN GRAY, SILTY SAND WITH SHELL FRAGMENTS	32.0	
-25	-26.0	37.9	5	8	13							Sat.			
-30	-31.0	42.9	8	9	25							Sat.			
-35	-36.0	47.9	18	23	35							Sat.	COASTAL PLAIN SEDIMENTARY ROCK LIGHT GRAY, SANDY, WEATHERED LIMESTONE, MODERATELY INDURATED	43.9	
-40	-41.0	52.9	45	55/0.4								Sat.	COASTAL PLAIN GRAY, SAND AND SILTY SAND WITH SHELL FRAGMENTS	47.5	
-45	-46.0	57.9	32	42	52							Sat.		51.5	
-50	-51.0	62.9	36	64/0.4								Sat.		57.0	
												Sat.		63.8	
													Boring Terminated at Elevation -51.9 ft IN VERY DENSE SILTY SAND		



WBS 34442.1.3		TIP R-2514B		COUNTY JONES/ONSLAW		GEOLOGIST Contract Geologist									
SITE DESCRIPTION DUAL BRIDGES ON -L- OVER WHITE OAK RIVER							GROUND WTR (ft)								
BORING NO. B6-B NBL		STATION 174+13		OFFSET 57 ft RT		ALIGNMENT -L-									
COLLAR ELEV. 11.8 ft		TOTAL DEPTH 64.9 ft		NORTHING 423,320		EASTING 2,527,573									
DRILL RIG/HAMMER EFF./DATE MAD 3964		DRILL METHOD Mud Rotary		HAMMER TYPE Automatic											
DRILLER Contract Driller		START DATE 09/24/13		COMP. DATE 09/24/13		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
15	11.8	0.0											11.8	GROUND SURFACE	0.0
10	8.2	3.6	WOH	WOH	WOH							W	ALLUVIAL BROWN AND BLACK, SANDY SILT WITH LITTLE ORGANIC MATTER		
5	6.4	5.4	1	1	2							W	GRAY, SILTY SAND, SAND AND CLAYEY SAND	6.0	
0	-3.4	8.4	3	8	10							Sat.		7.5	
-5	-1.6	13.4	7	6	6							Sat.		12.0	
-10	-6.6	18.4	4	4	5							Sat.		12.0	
-15	-11.6	23.4	24	26	32							Sat.	COASTAL PLAIN SEDIMENTARY ROCK LIGHT GRAY, SANDY, WEATHERED LIMESTONE, MODERATELY INDURATED (BELGRADE FORMATION)	22.0	
-20	-16.6	28.4	10	14	15							W	GRAY, SANDY SILT WITH SHELL FRAGMENTS	27.0	
-25	-21.6	33.4	11	17	23							Sat.		32.0	
-30	-26.6	38.4	11	22	15							Sat.		32.0	
-35	-31.6	43.4	22	38	49							Sat.		42.0	
-40	-36.6	48.4	23	45	55/0.4							Sat.		42.0	
-45	-41.6	53.4	11	34	45							Sat.		51.5	
-50	-46.6	58.4	29	45	55/0.4							Sat.		57.0	
	-51.6	63.4	14	23	31							Sat.		63.8	
													Boring Terminated at Elevation -53.1 ft IN VERY DENSE SAND		

NCDOT BORE DOUBLE R2514B GEO_BRDG_WHITE_OAK_RIVER.GPJ NC_DOT_GDT 12/18/13



NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

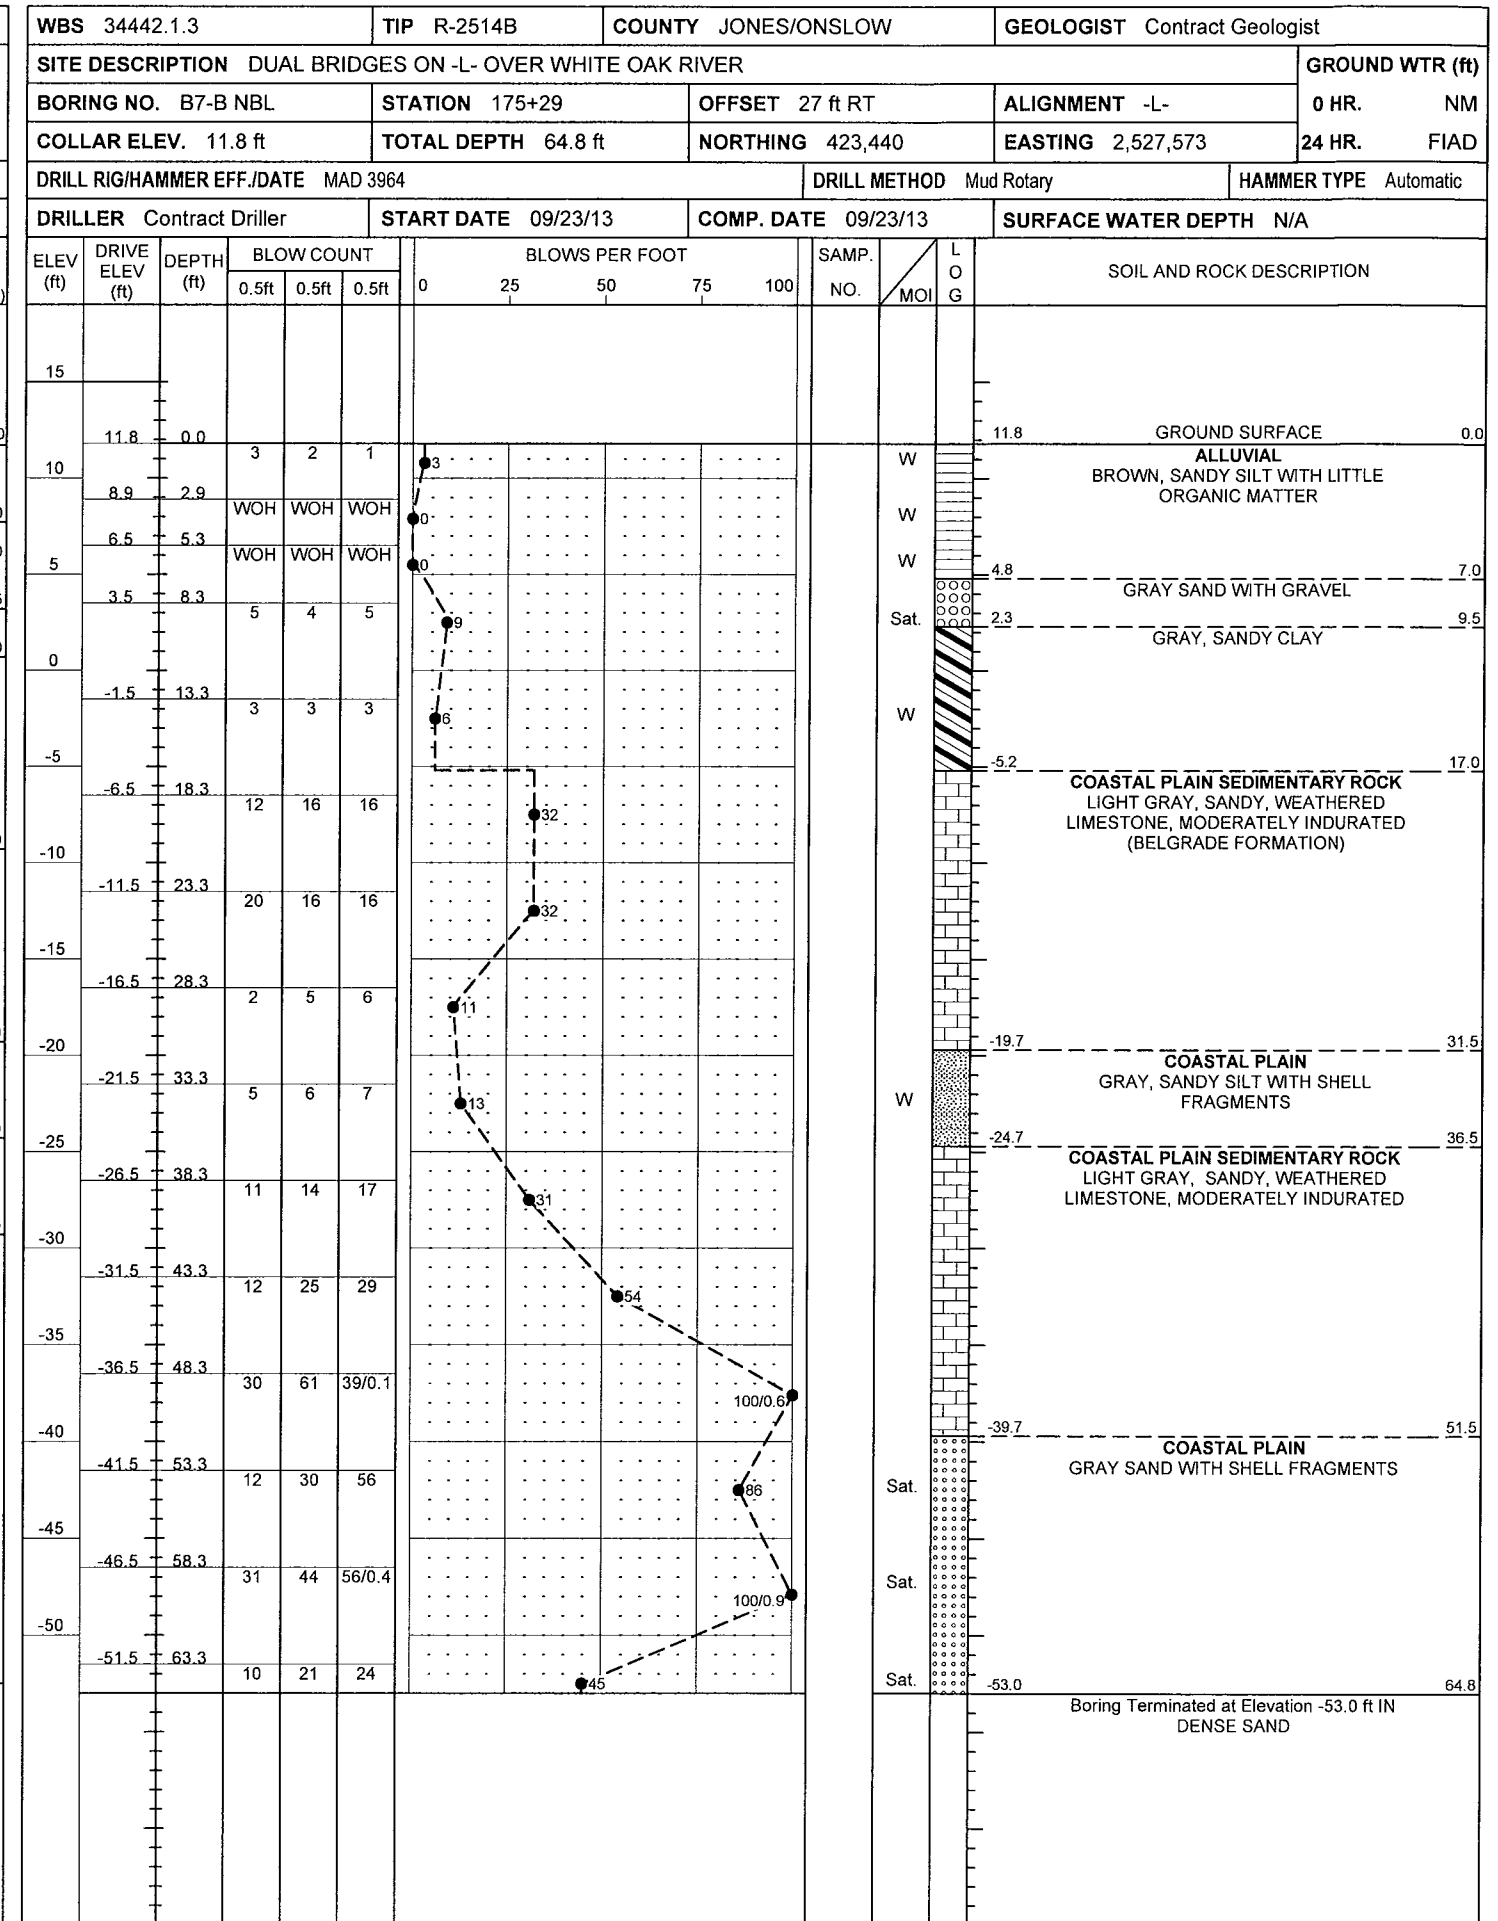
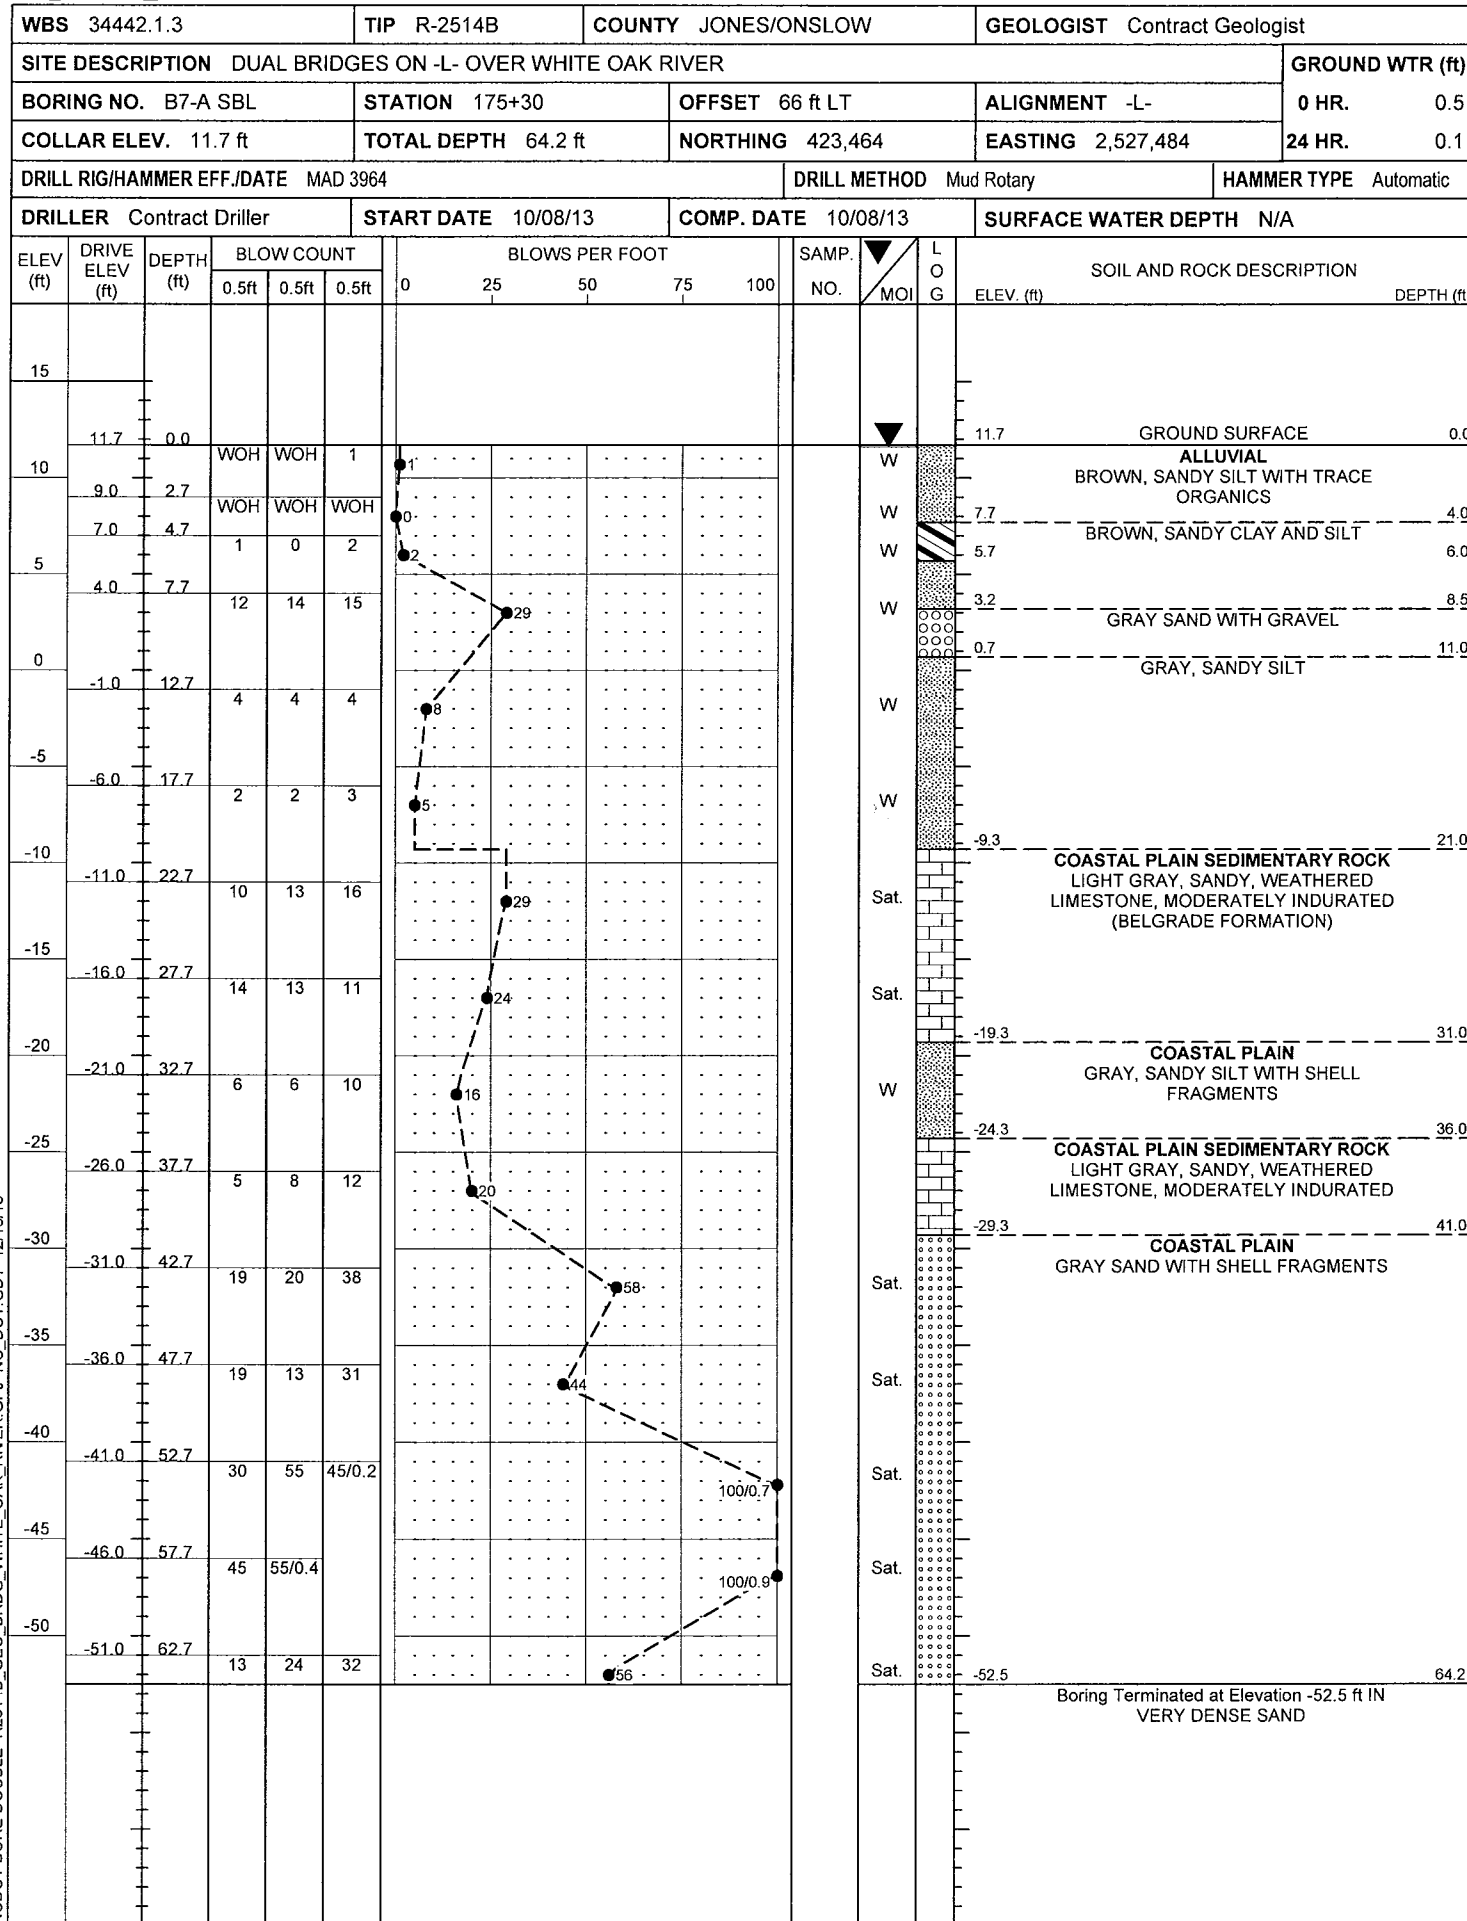


NCDOT BORE DOUBLE R2514B GEO. BRDG. WHITE OAK RIVER.GPJ NC.DOT.GDT 12/16/13



NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

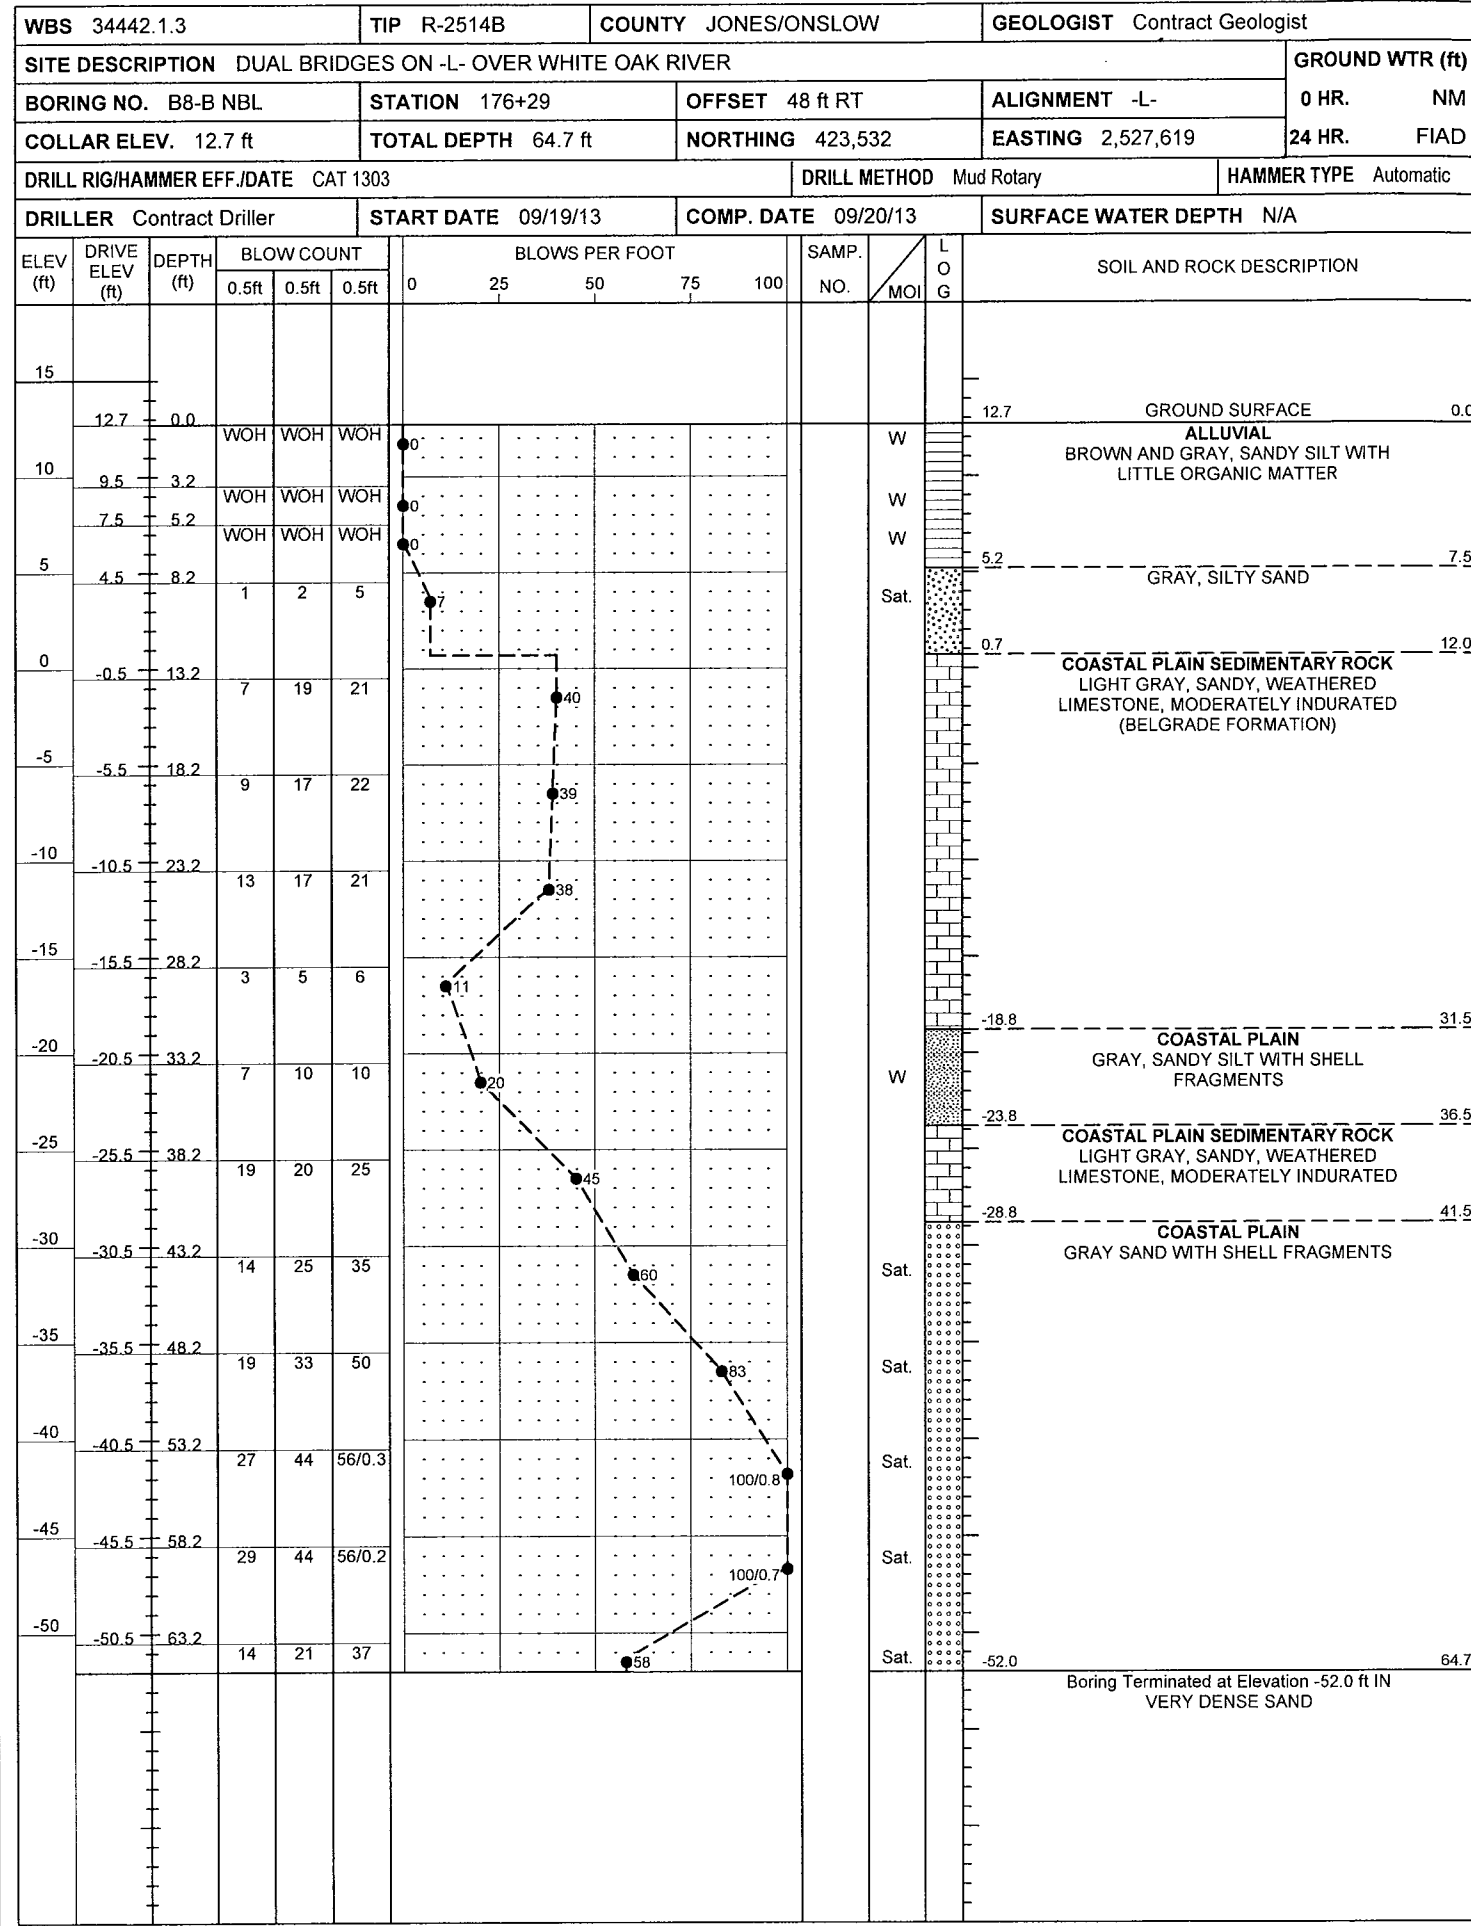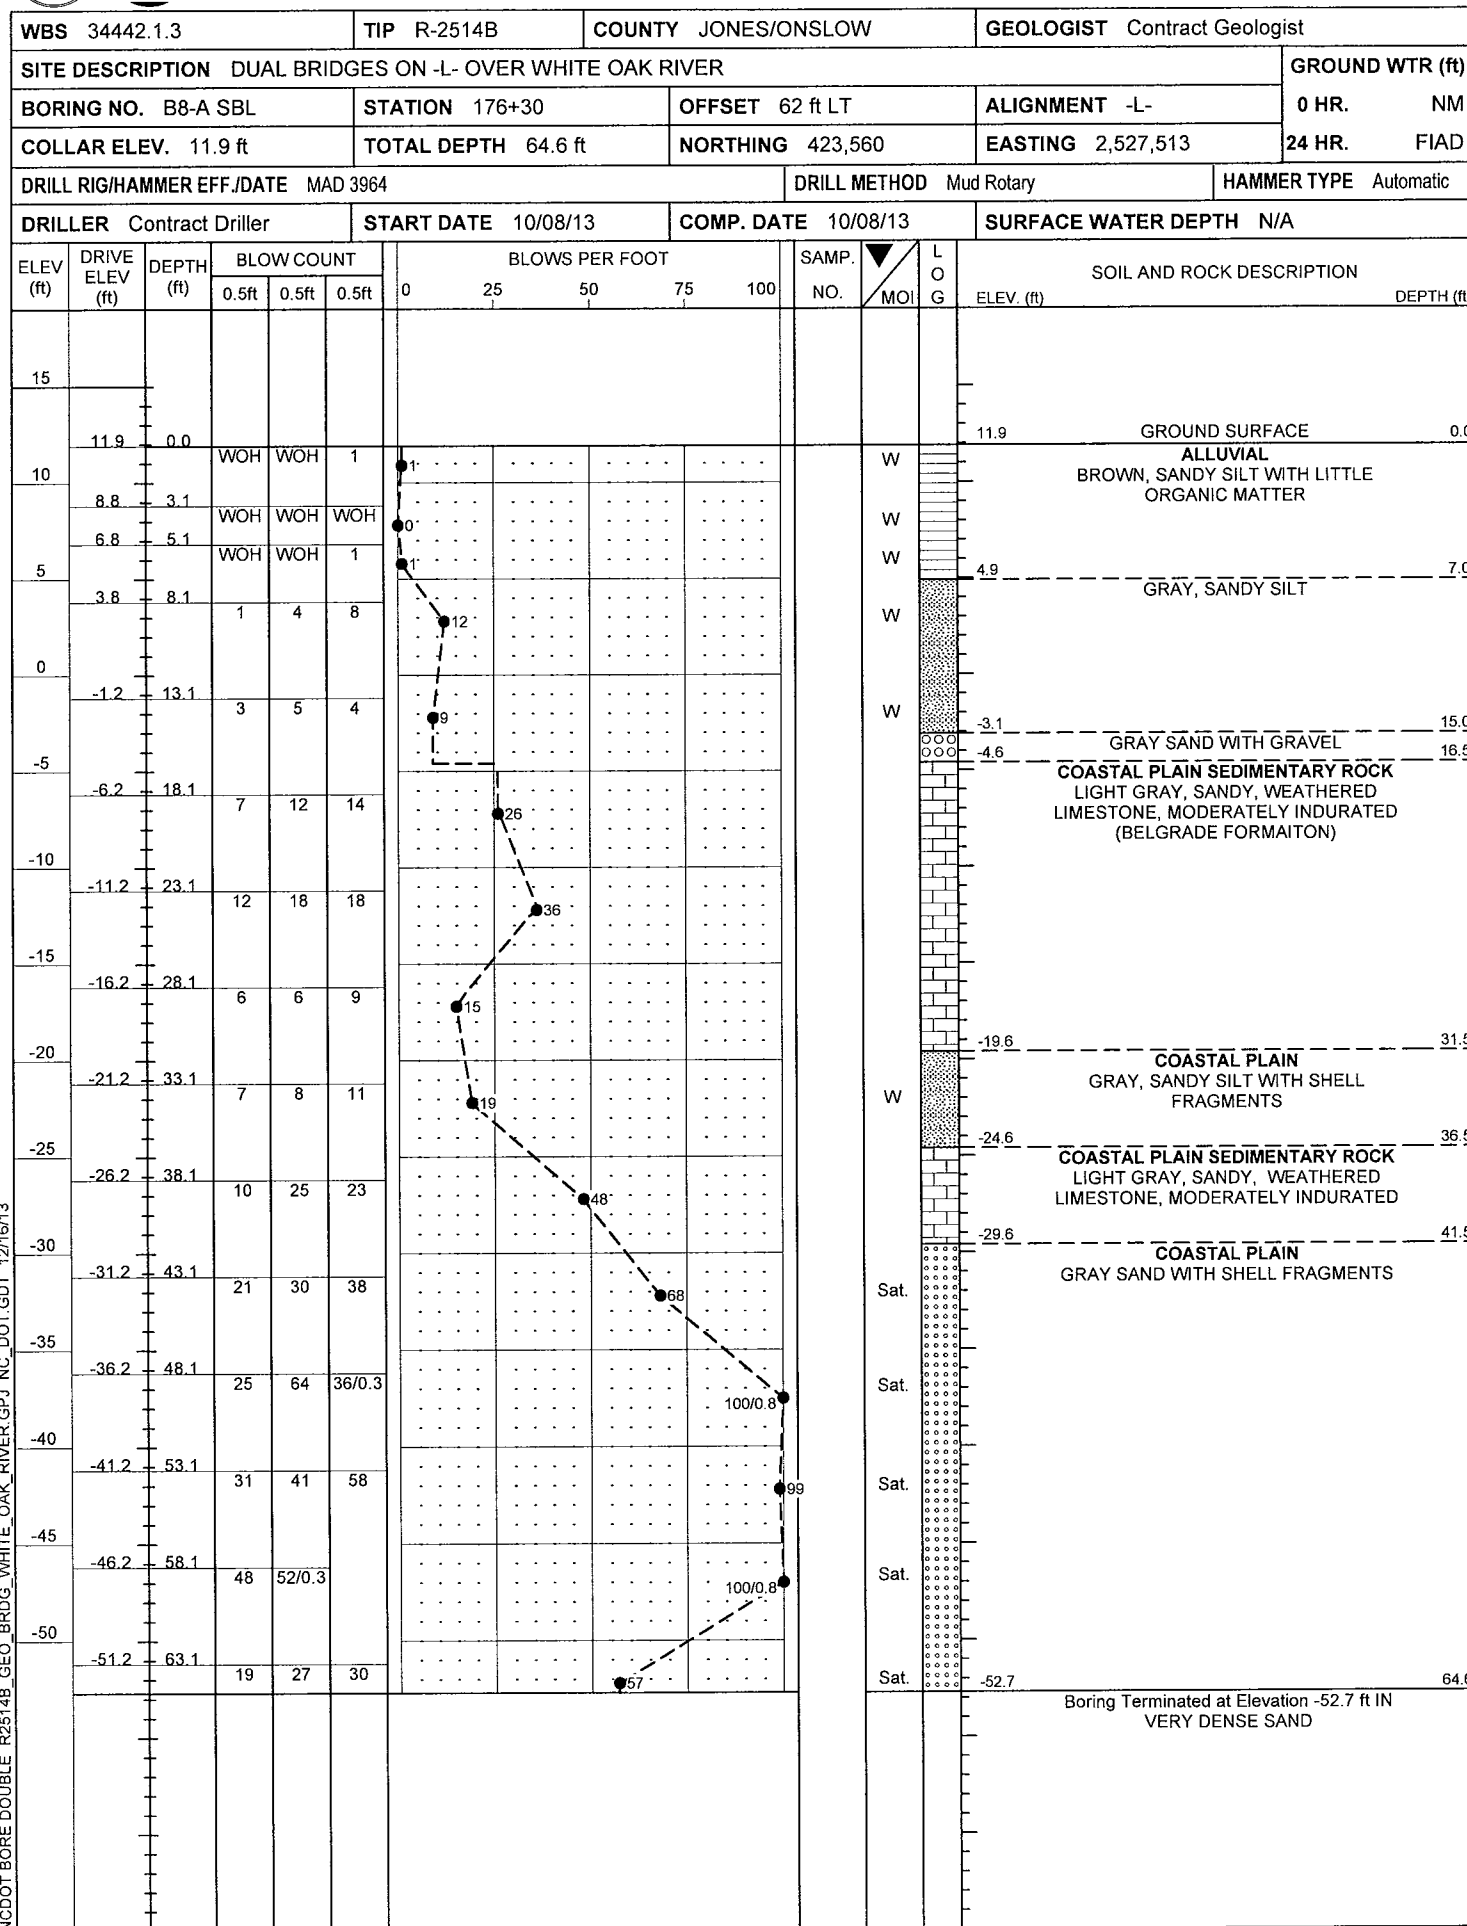


NCDOT BORE DOUBLE R2514B GEO BRDG WHITE OAK RIVER GPJ NC DOT.GDT 12/16/13




WBS 34442.1.3	TIP R-2514B	COUNTY JONES/ONSLOW	GEOLOGIST Contract Geologist
SITE DESCRIPTION DUAL BRIDGES ON -L- OVER WHITE OAK RIVER			
BORING NO. B10-A SBL	STATION 178+46	OFFSET 54 ft LT	ALIGNMENT -L-
COLLAR ELEV. 13.0 ft	TOTAL DEPTH 64.3 ft	NORTHING 423,767	EASTING 2,527,572
DRILL RIG/HAMMER EFF./DATE MAD 3964			DRILL METHOD Mud Rotary
DRILLER Contract Driller			HAMMER TYPE Automatic
START DATE 10/10/13	COMP. DATE 10/10/13	SURFACE WATER DEPTH N/A	
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	GROUND WTR (ft)
			0 HR. NM
			24 HR. -0.8

BLOW COUNT	BLOWS PER FOOT				SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION
0.5ft	0.5ft	0.5ft	0	25	50	75	100

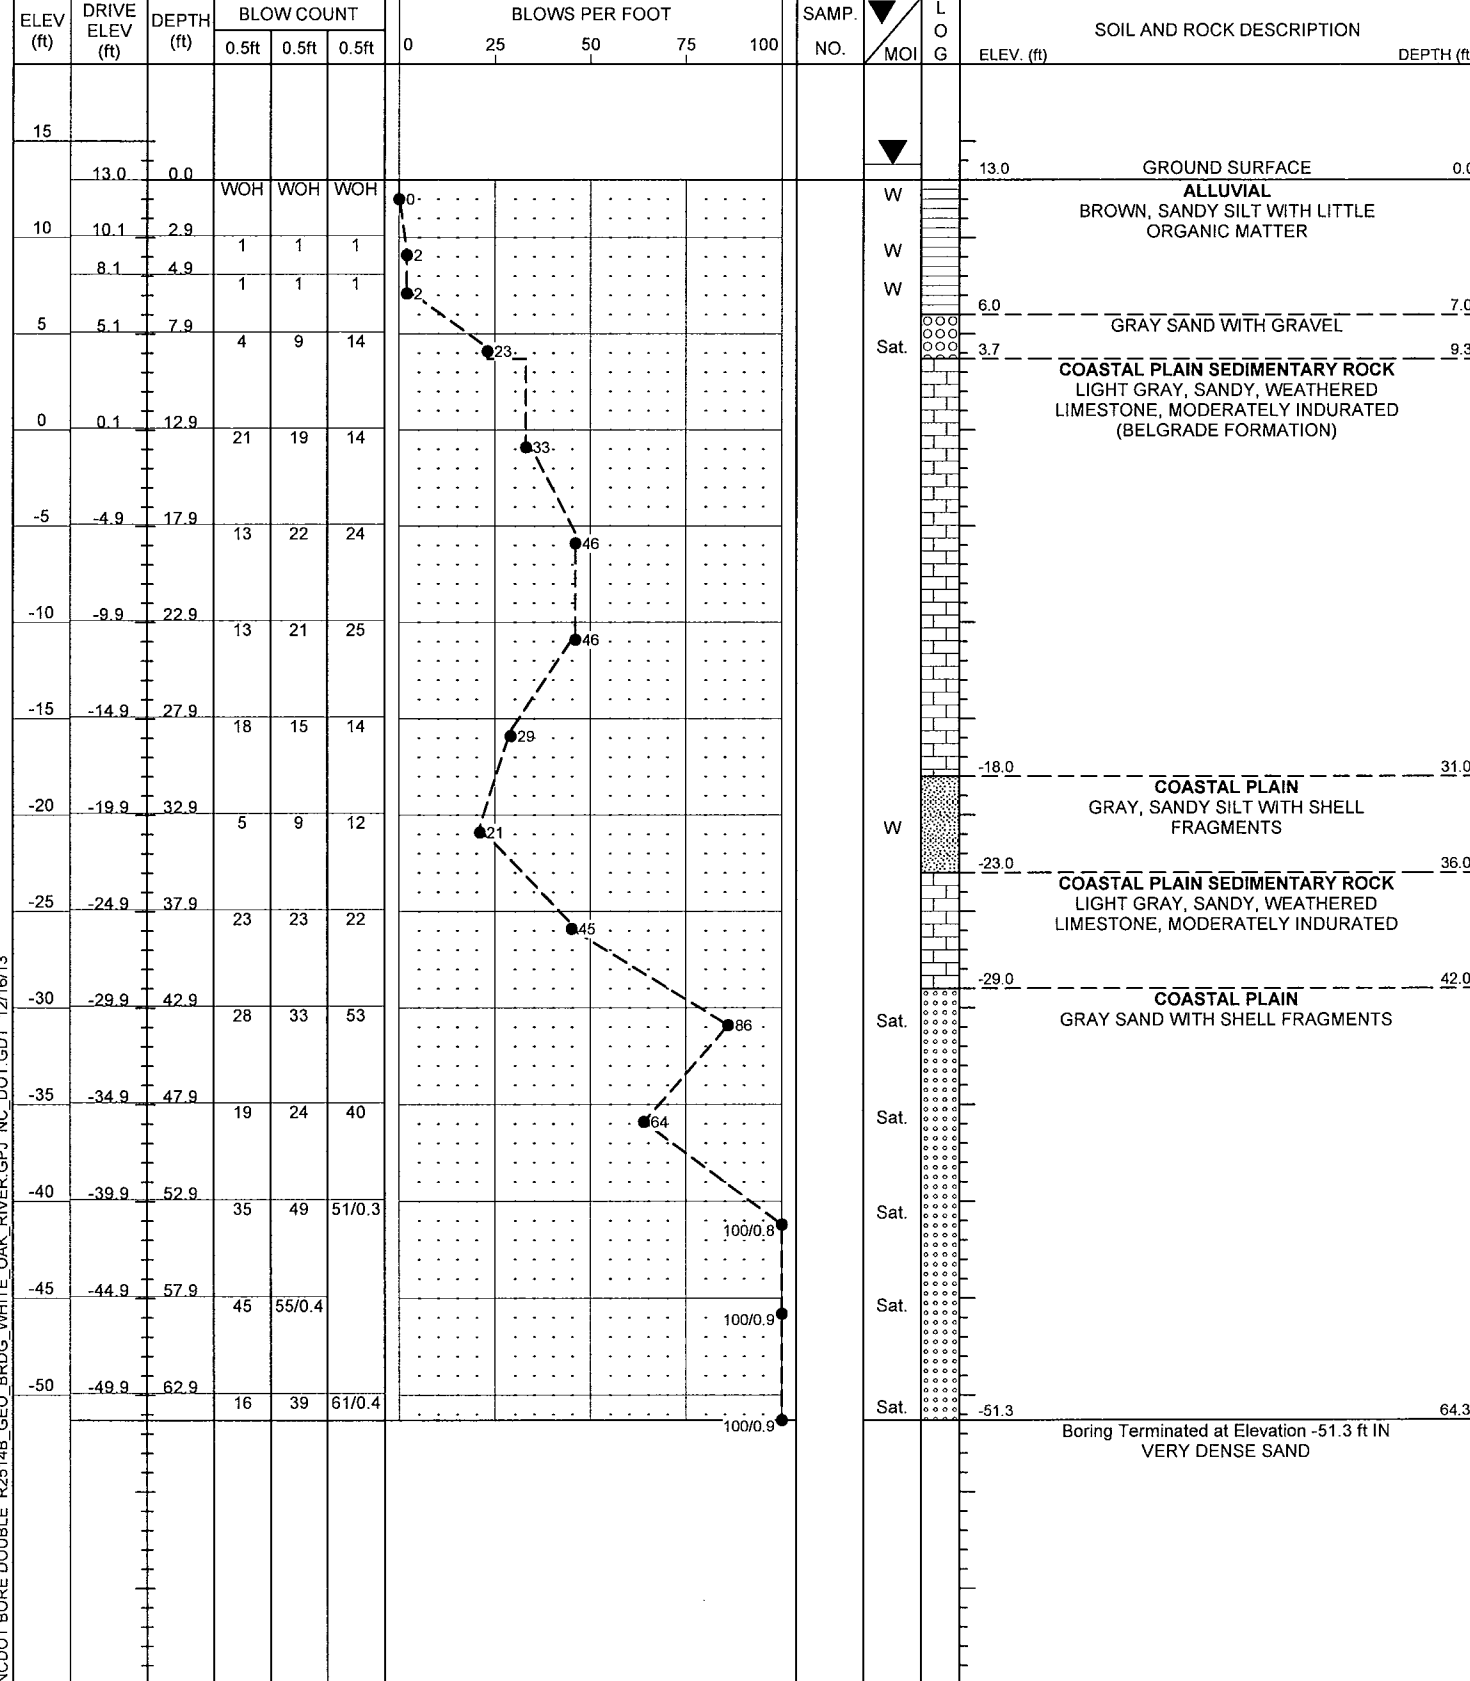


WBS 34442.1.3	TIP R-2514B	COUNTY JONES/ONSLOW	GEOLOGIST Contract Geologist
SITE DESCRIPTION DUAL BRIDGES ON -L- OVER WHITE OAK RIVER			
BORING NO. B10-B NBL	STATION 178+27	OFFSET 31 ft RT	ALIGNMENT -L-
COLLAR ELEV. 14.6 ft	TOTAL DEPTH 74.7 ft	NORTHING 423,728	EASTING 2,527,650
DRILL RIG/HAMMER EFF./DATE MAD 3964			DRILL METHOD Mud Rotary
DRILLER Contract Driller			HAMMER TYPE Automatic
START DATE 09/17/13	COMP. DATE 09/18/13	SURFACE WATER DEPTH N/A	
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	GROUND WTR (ft)
			0 HR. 0.3
			24 HR. FIAD

BLOW COUNT	BLOWS PER FOOT				SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION
0.5ft	0.5ft	0.5ft	0	25	50	75	100

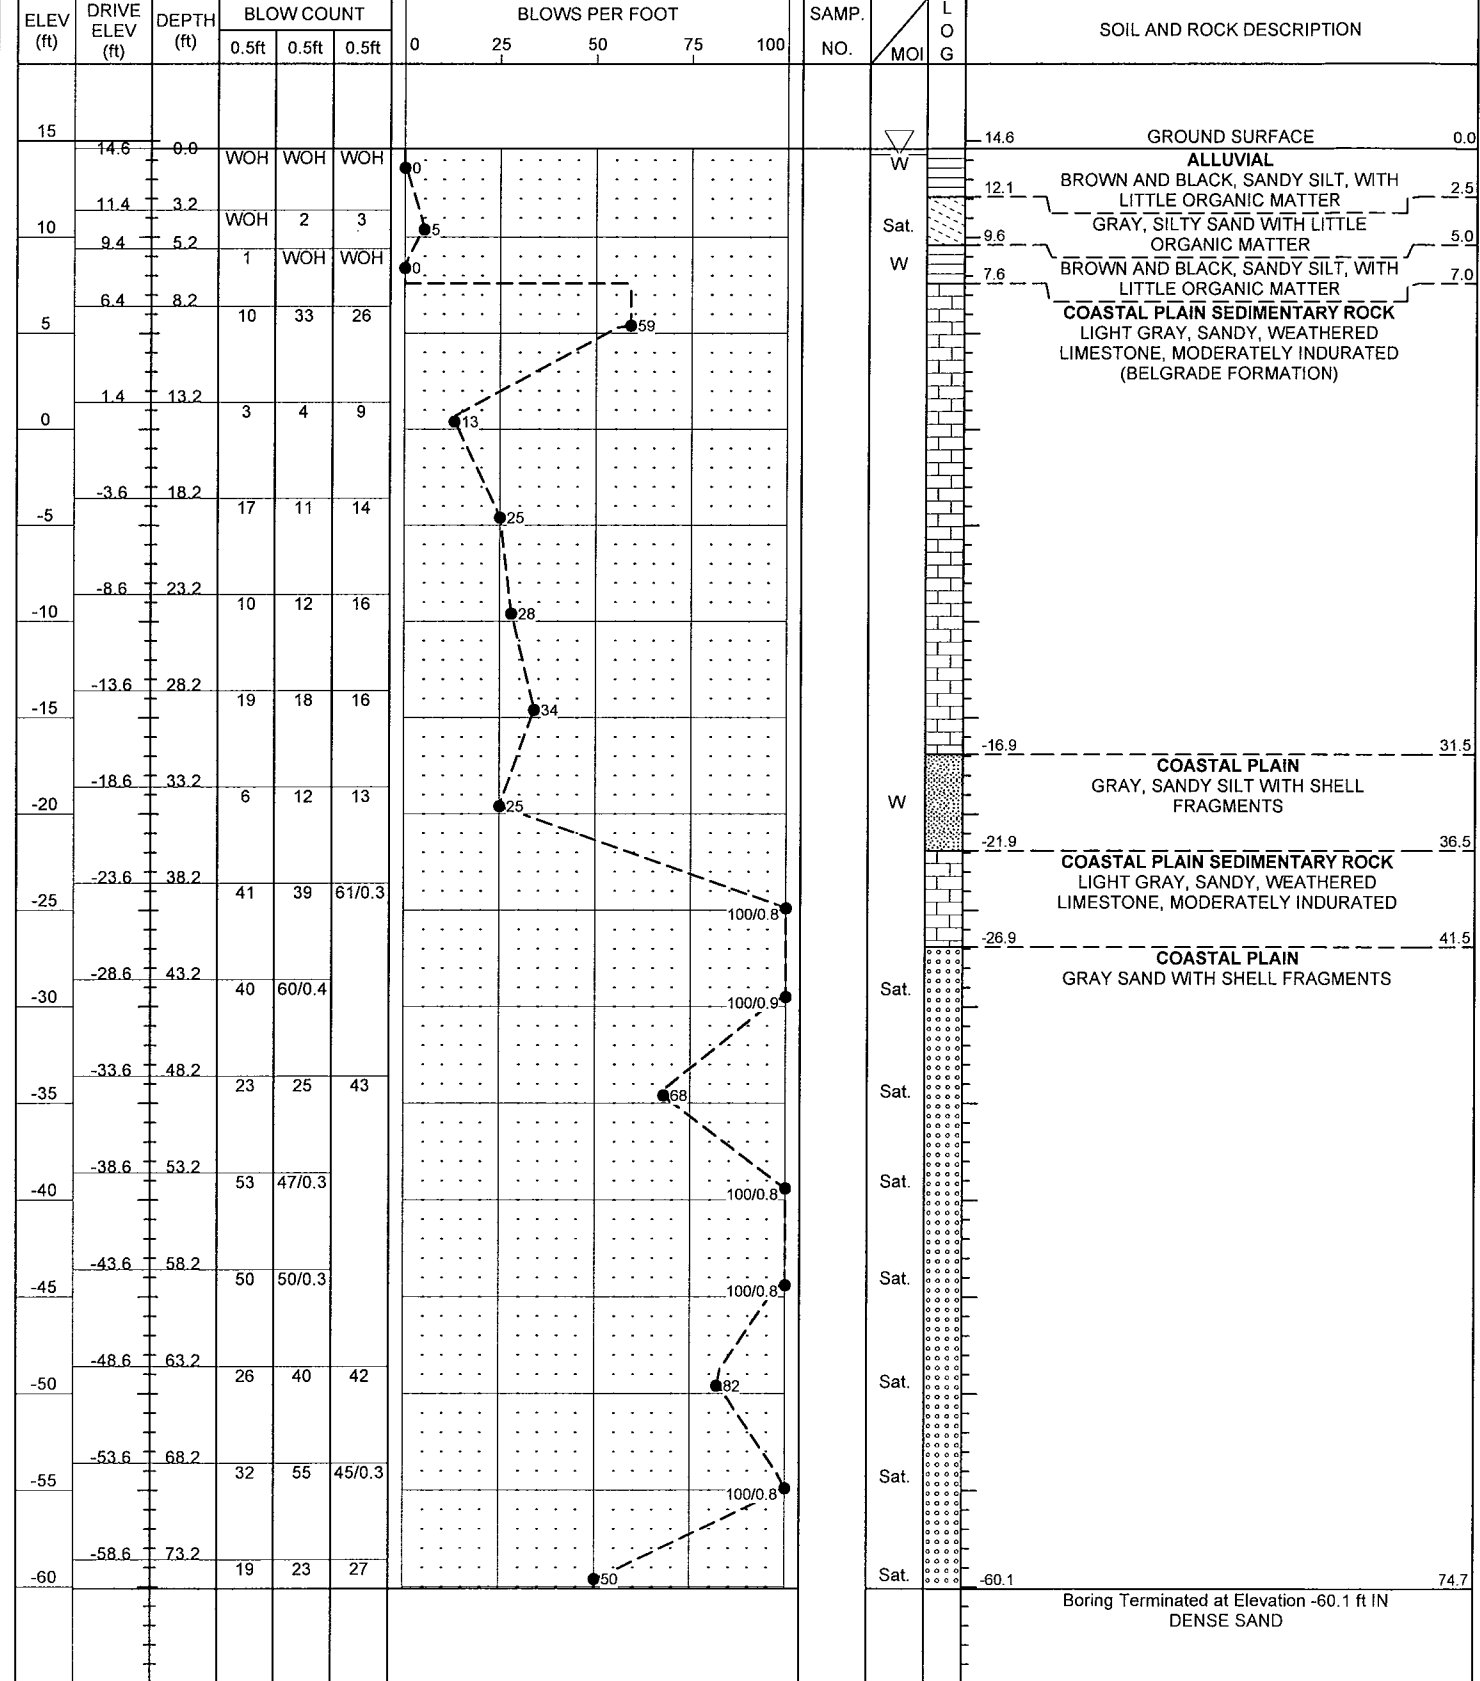


NCDOT BORE DOUBLE R2514B_GEO_BRDG_WHITE_OAK_RIVER_GPJ_NC_DOT_GDT_12/16/13

WBS 34442.1.3	TIP R-2514B	COUNTY JONES/ONSLOW	GEOLOGIST Contract Geologist
SITE DESCRIPTION DUAL BRIDGES ON -L- OVER WHITE OAK RIVER			GROUND WTR (ft)
BORING NO. EB2-A SBL	STATION 179+34	OFFSET 27 ft LT	ALIGNMENT -L-
COLLAR ELEV. 32.1 ft	TOTAL DEPTH 64.9 ft	NORTHING 423,846	EASTING 2,527,619
DRILL RIG/HAMMER EFF./DATE CAT 1303			DRILL METHOD Mud Rotary
DRILLER Contract Driller			HAMMER TYPE Automatic
START DATE 09/24/13		COMP. DATE 09/24/13	SURFACE WATER DEPTH N/A

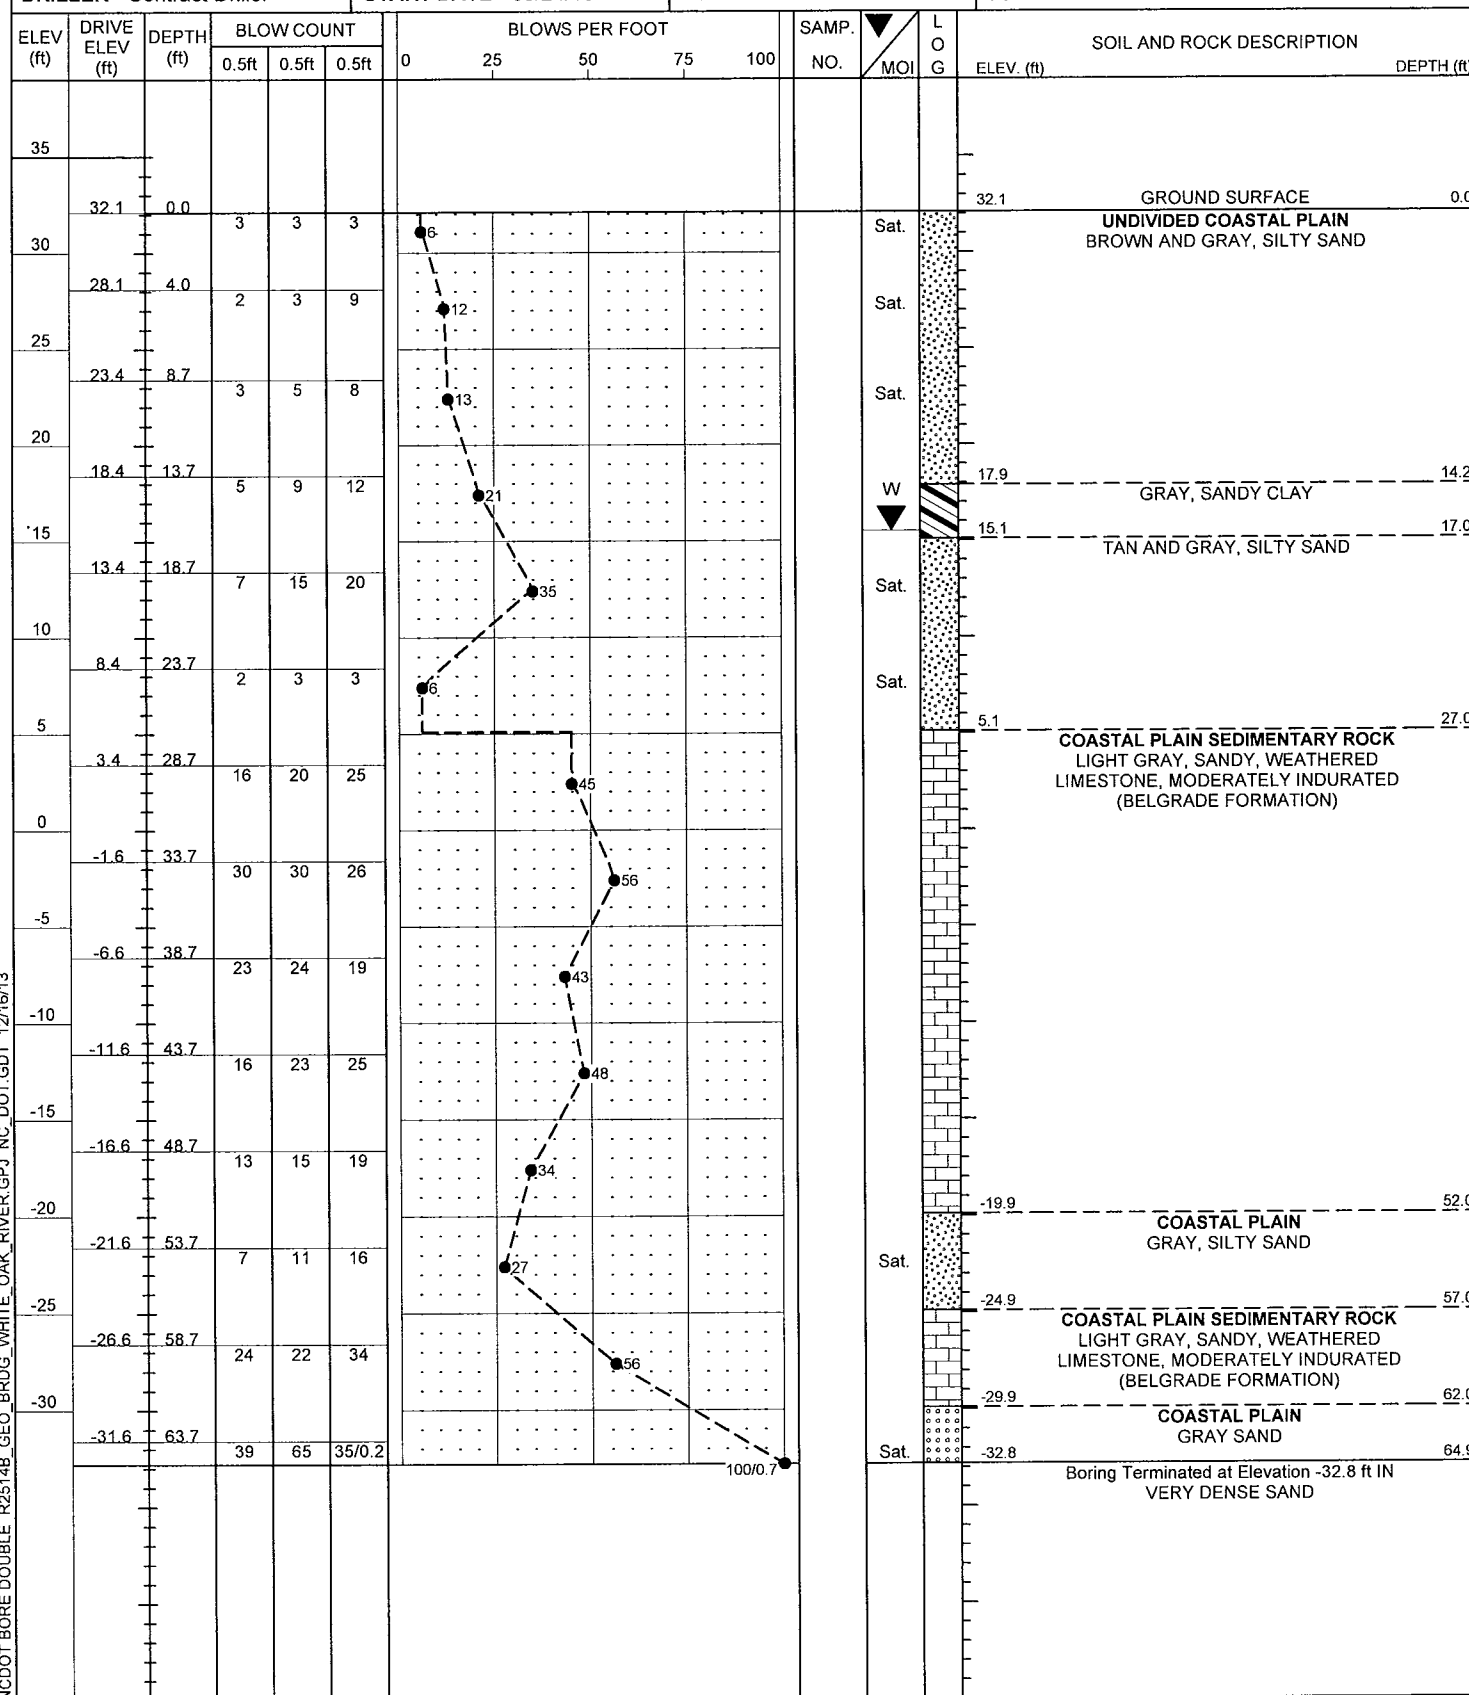

WBS 34442.1.3	TIP R-2514B	COUNTY JONES/ONSLOW	GEOLOGIST Contract Geologist
SITE DESCRIPTION DUAL BRIDGES ON -L- OVER WHITE OAK RIVER			GROUND WTR (ft)
BORING NO. EB2-B NBL	STATION 179+37	OFFSET 59 ft RT	ALIGNMENT -L-
COLLAR ELEV. 33.3 ft	TOTAL DEPTH 64.5 ft	NORTHING 423,829	EASTING 2,527,703
DRILL RIG/HAMMER EFF./DATE CAT 1303			DRILL METHOD Mud Rotary
DRILLER Contract Driller			HAMMER TYPE Automatic
START DATE 09/23/13		COMP. DATE 09/23/13	SURFACE WATER DEPTH N/A

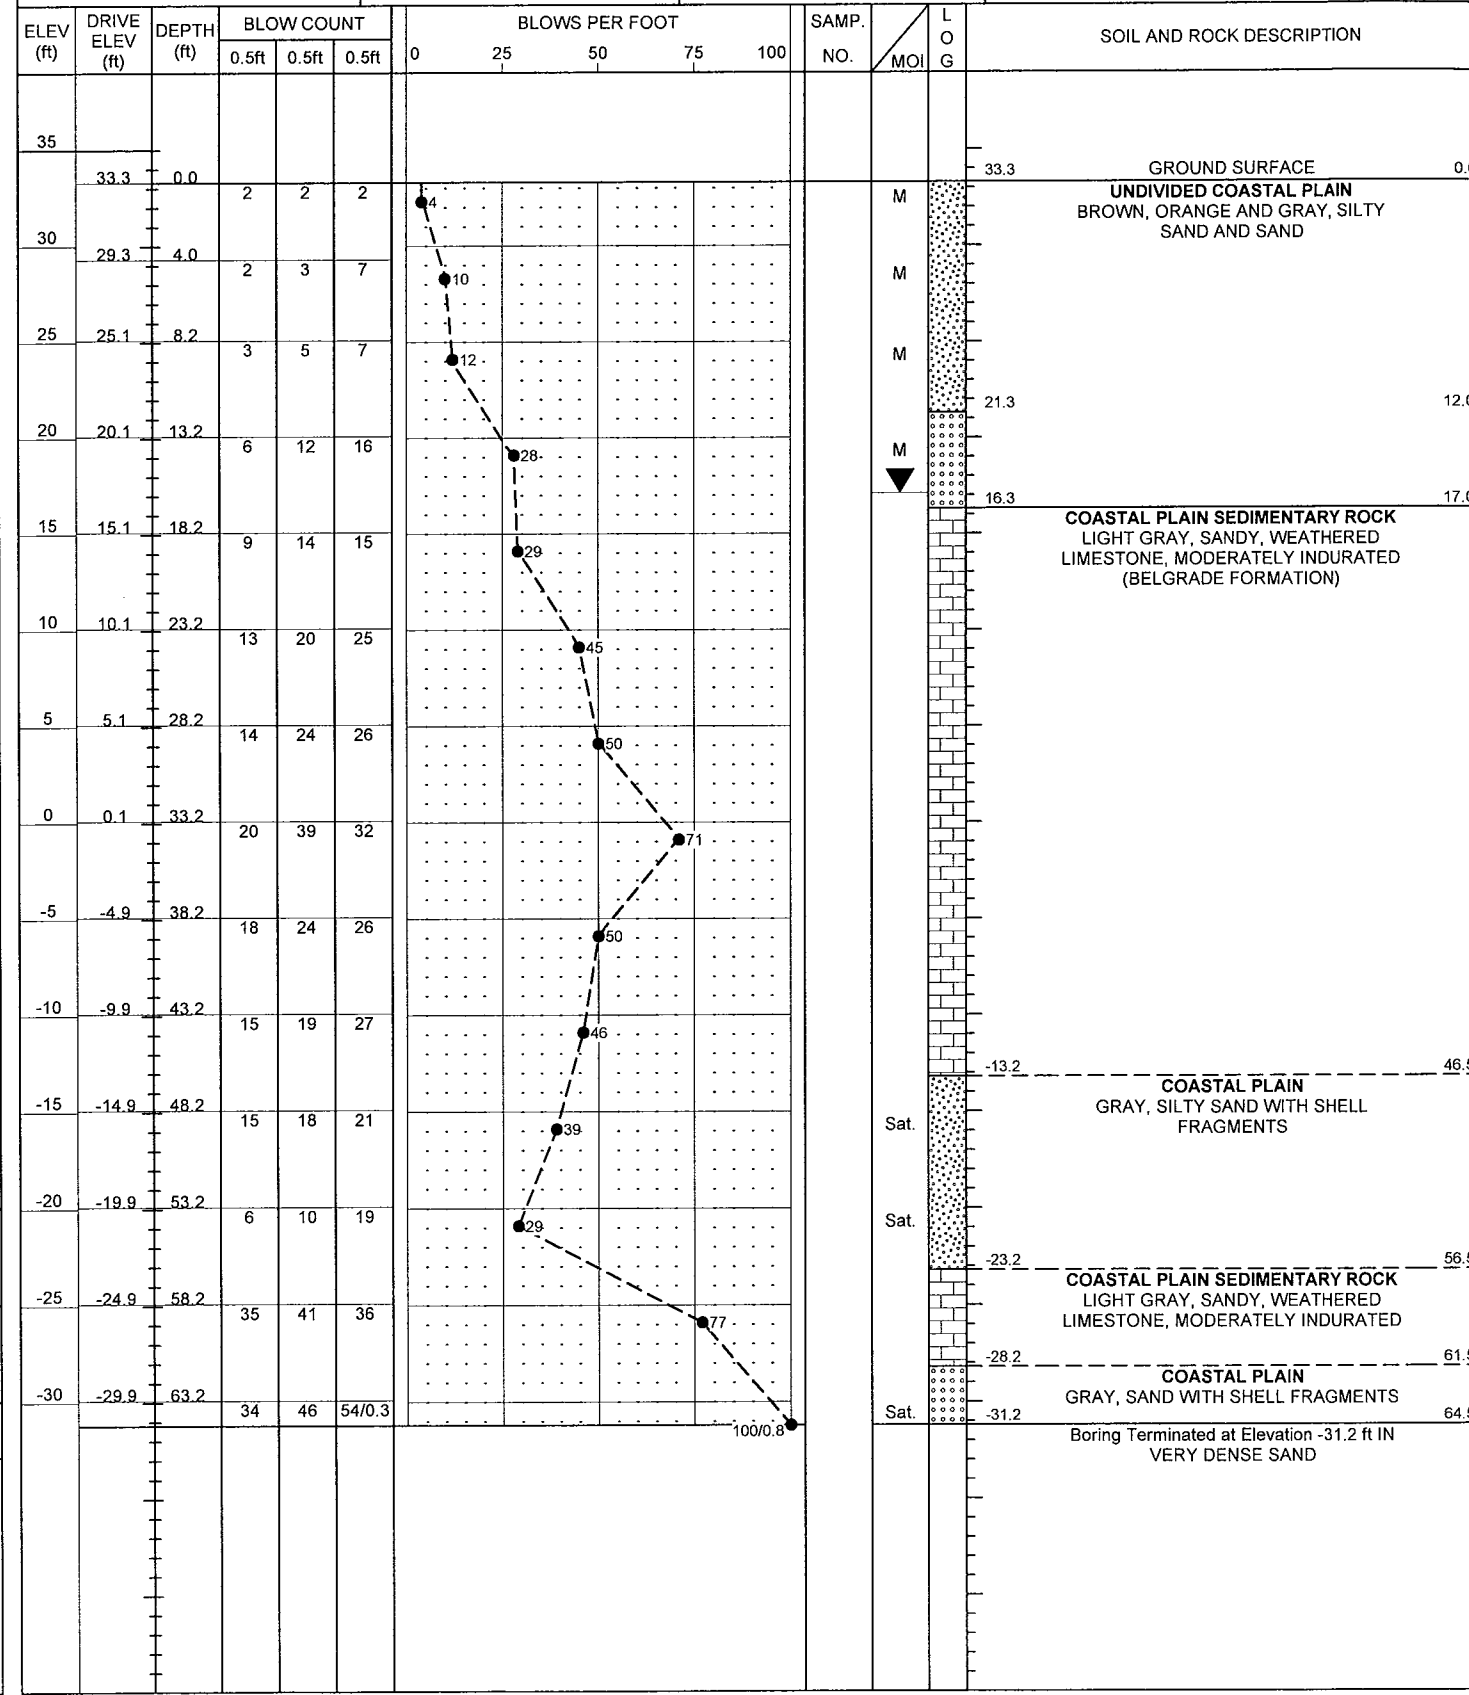

NCDOT BORE DOUBLE R2514B GEO BRDG WHITE OAK RIVER GP J NC_DOT_GDT 12/16/13