



**TYPICAL SECTION NO. 4**

NOTE: MILL TO MATCH DEPTH OF SETTLEMENT IN PAVEMENT AREA

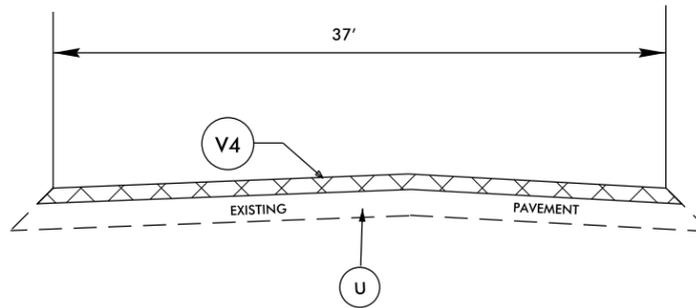


**TYPICAL SECTION NO. 5**

NOTE: MILL TO MATCH DEPTH OF SETTLEMENT IN PAVEMENT AREA

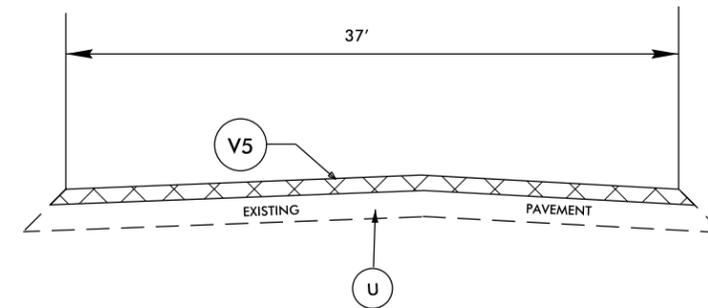


**TYPICAL SECTION NO. 6**


NOTE: MILL TO MATCH DEPTH OF SETTLEMENT IN PAVEMENT AREA

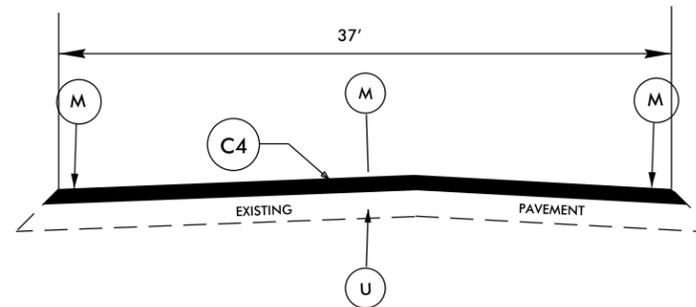

**TYPICAL SECTION NO. 7**

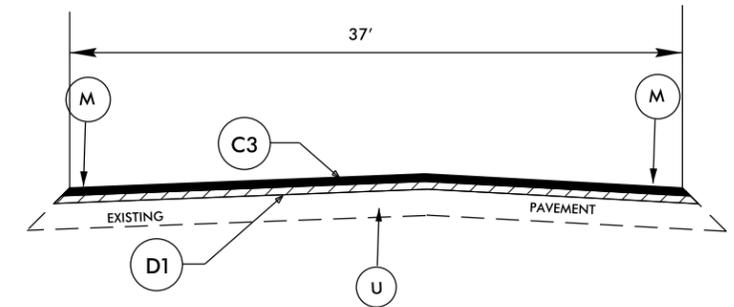

**TYPICAL SECTION NO. 8**

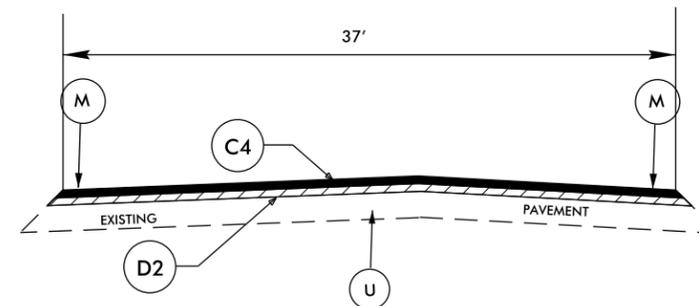

**TYPICAL SECTION NO. 9**

PAVEMENT SCHEDULE	
C3	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C4	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
D1	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
D2	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
M	PROP. MILLED RUMBLE SRIP (SEE RDWY STD. 665.01)
U	EXISTING PAVEMENT
V3	MILLING BITUMINOUS PAVEMENT. 0" TO 2" DEPTH.
V4	MILLING BITUMINOUS PAVEMENT. 0" TO 4" DEPTH.
V5	MILLING BITUMINOUS PAVEMENT. 0" TO 6" DEPTH.

NOT TO SCALE