STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	7CR.10791.57, 7CR.20791.57	5	

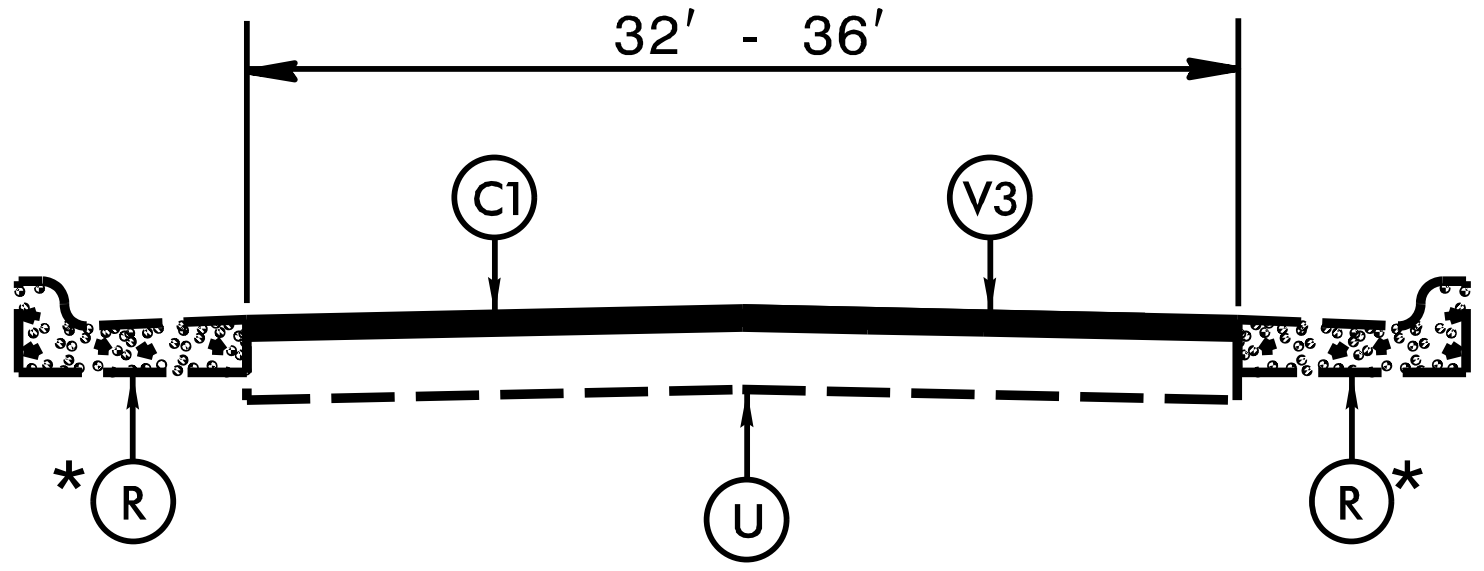

*NOTE: NO CURB AND GUTTER SECTION:
STA. 0+00 TO STA. 0+85

TYPICAL SECTION NO. 14

TO BE USED ON MAP 20
STA. 0+00 TO STA. 11+20

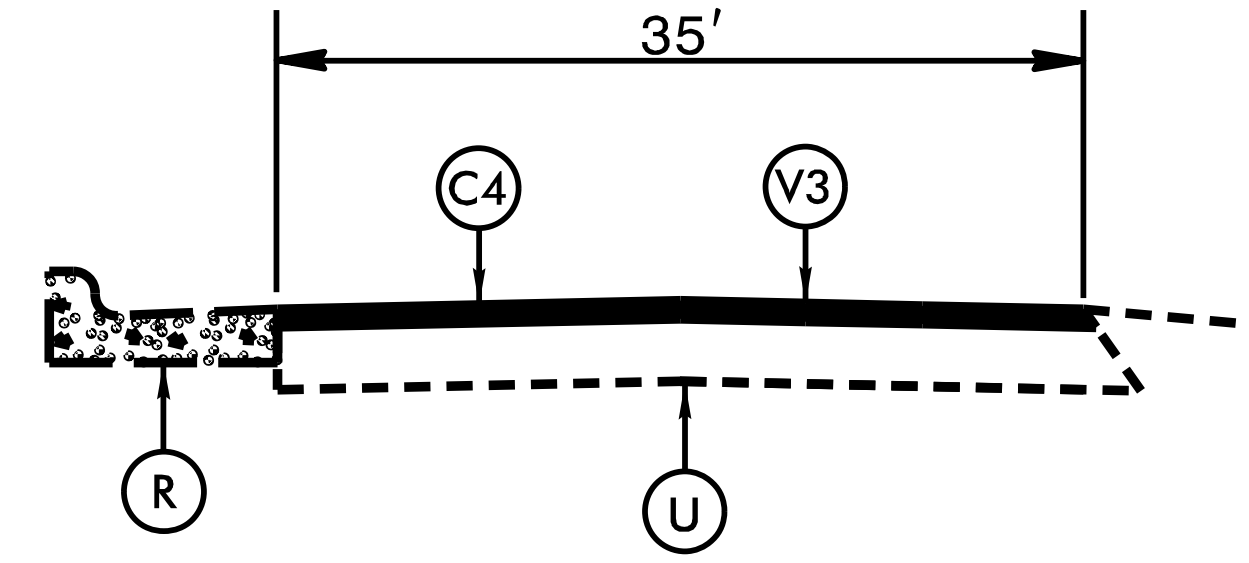

TYPICAL SECTION NO. 17

TO BE USED ON MAP 21
STA. 0+00 TO STA. 17+60
STA. 21+25 TO STA. 24+75

MILLING DETAIL 1

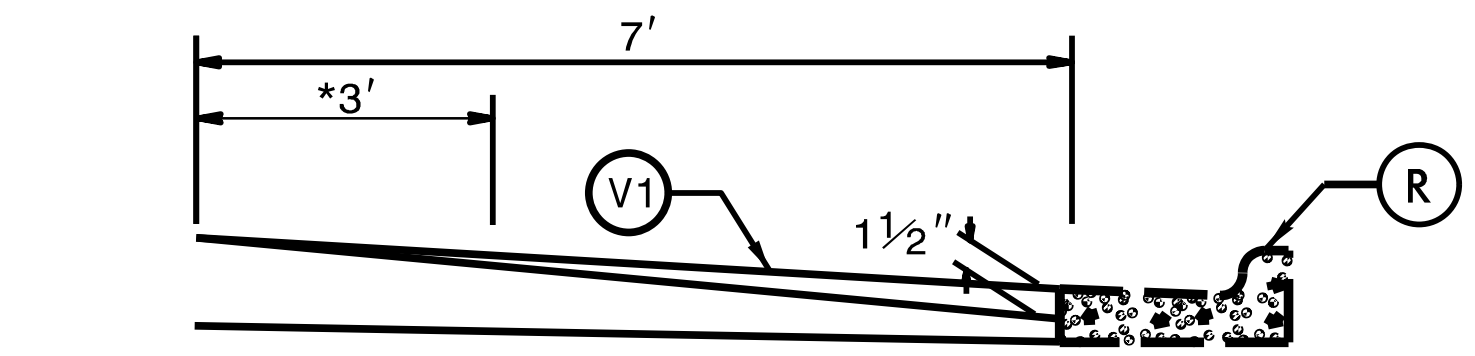

*IF #67 STONE OR 78M SEAL IS INVOLVED OVERLAP 3′.
PROFILE MILLING 0 - 1½″

PROFILE MILL EXISTING ASPHALT PAVEMENT 1½″ AT LOCATIONS AS DIRECTED BY THE ENGINEER.

NOTE: TO BE USED IN CONJUNCTION WITH:

TS. NO. 1 ON MAP 1 STA. 0+00 TO STA. 5+05 LT
TS. NO. 1 ON MAP 1 STA. 64+40 TO STA. 71+80 LT
TS. NO. 3 ON MAP 1 STA. 14+80 TO STA. 16+50 RT
TS. NO. 4 ON MAP 1 STA. 71+80 TO STA. 74+75 LT
TS. NO. 4 ON MAP 1 STA. 77+20 TO STA. 81+55 LT
TS. NO. 4 ON MAP 1 STA. 82+75 TO STA. 84+85 LT

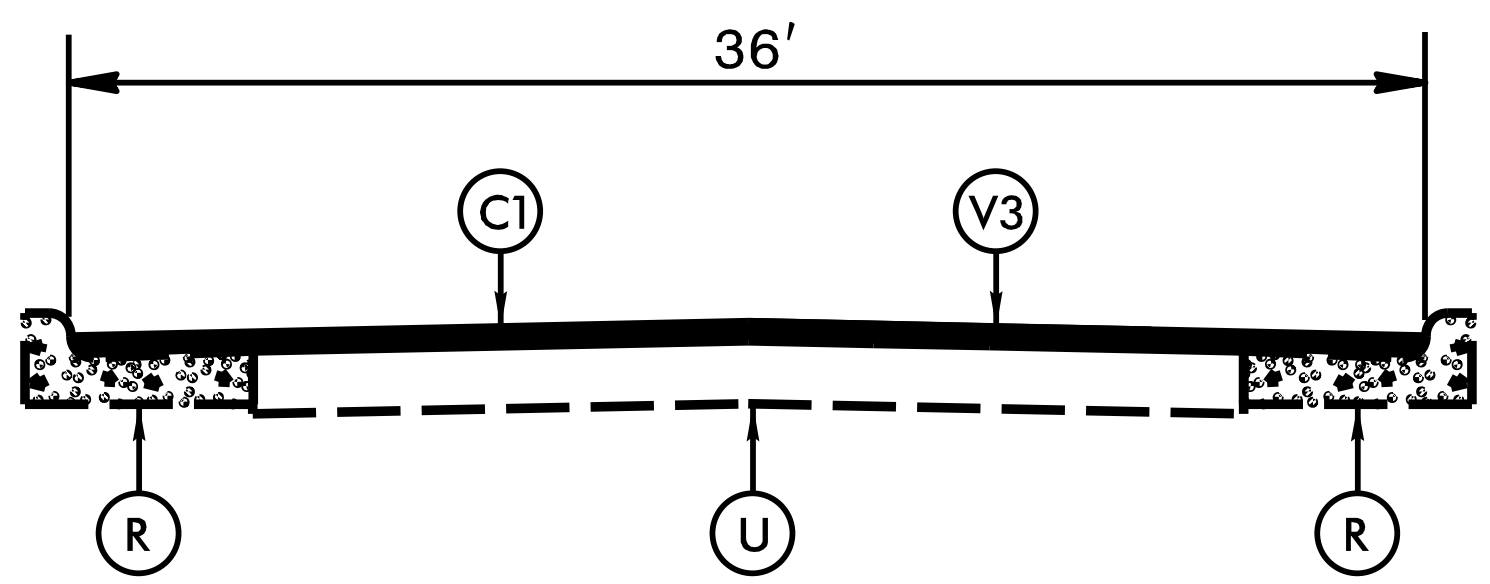

TYPICAL SECTION NO. 15

TO BE USED ON MAP 20
STA. 11+20 TO STA. 24+35

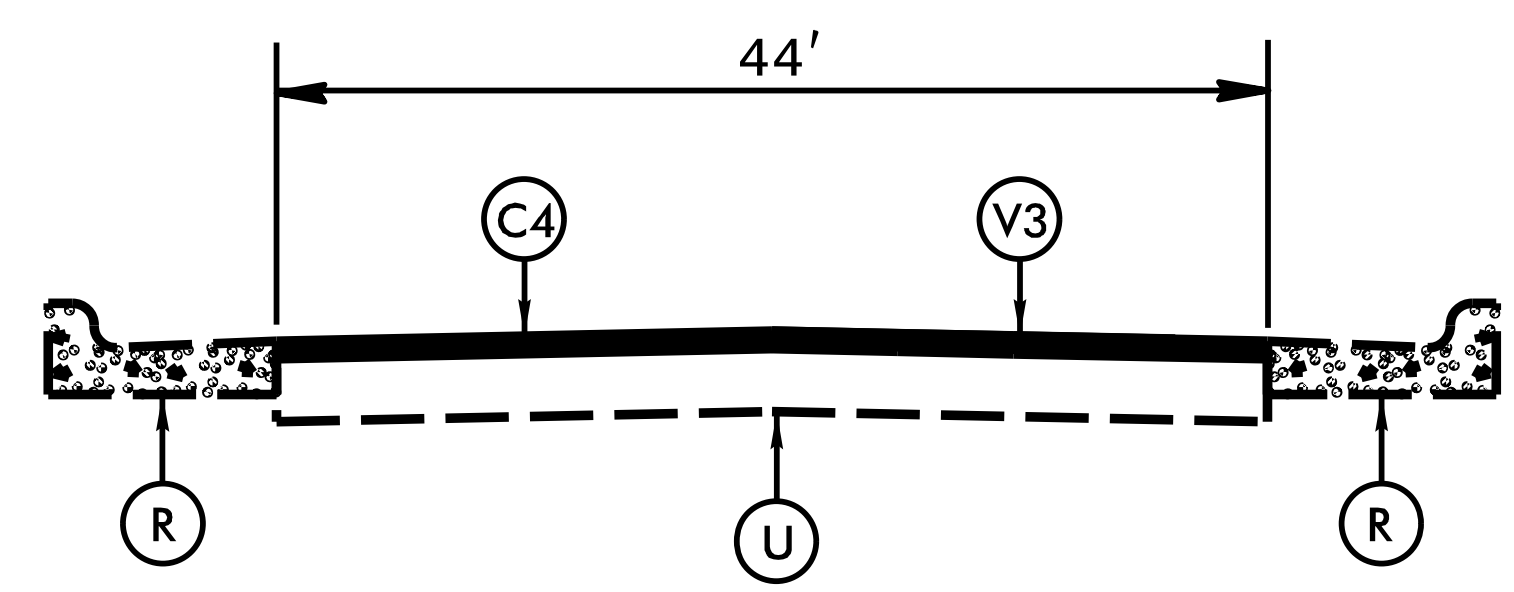

TYPICAL SECTION NO. 18

TO BE USED ON MAP 21
STA. 17+60 TO STA. 21+25

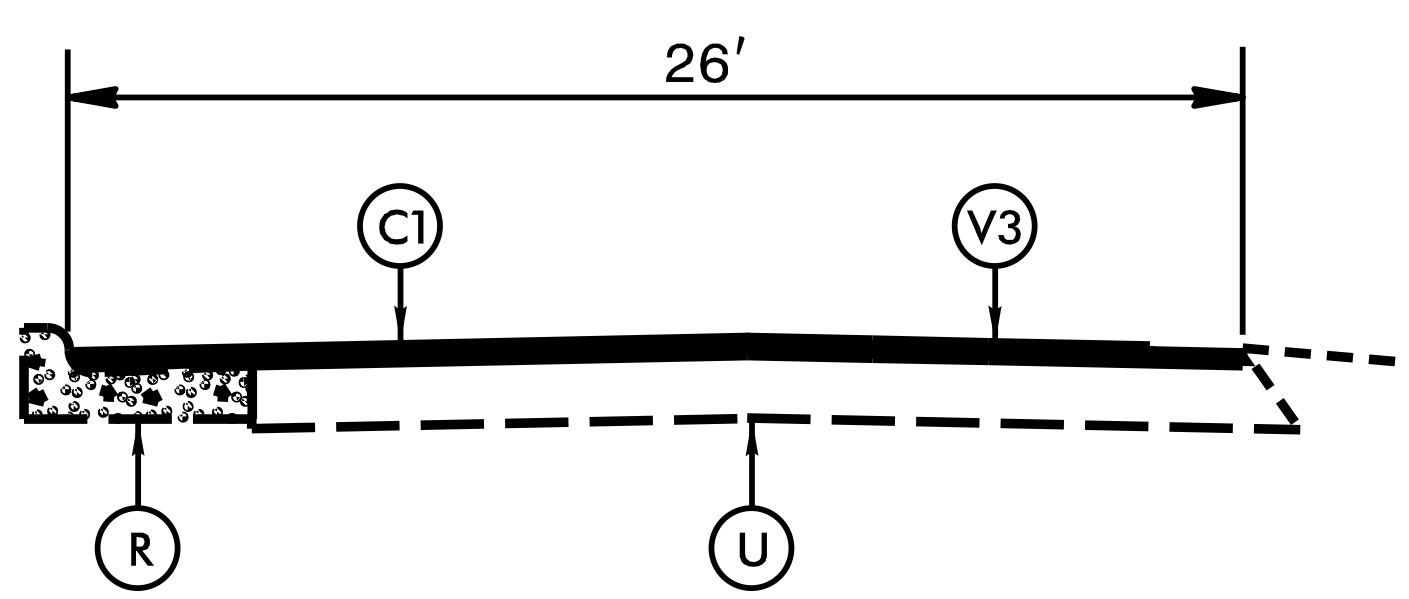

TYPICAL SECTION NO. 16

TO BE USED ON MAP 20
STA. 24+35 TO STA. 30+95

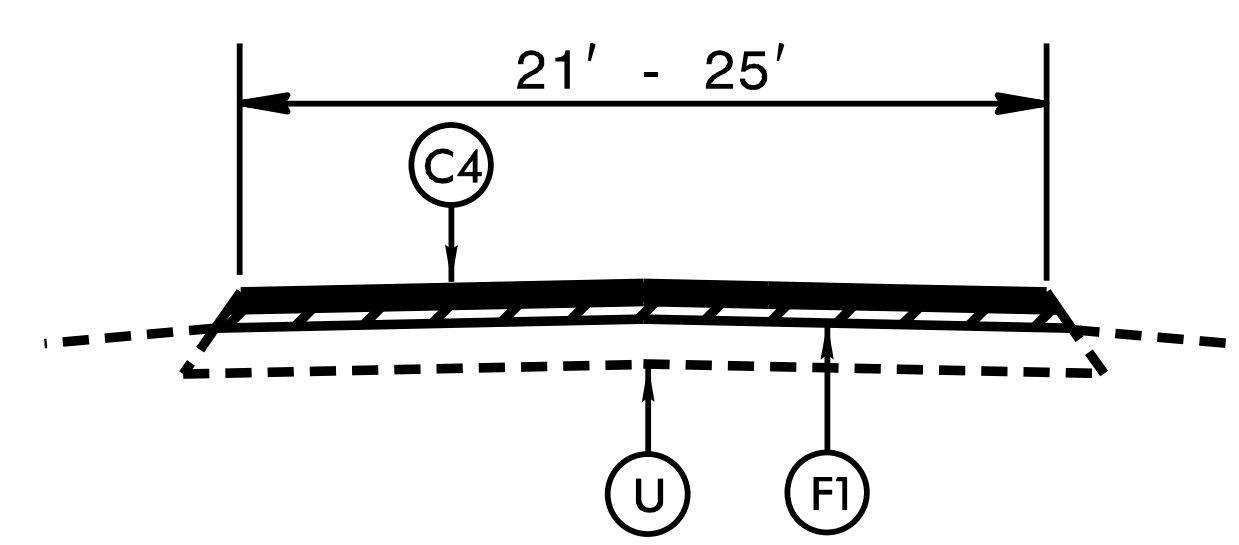

TYPICAL SECTION NO. 19

TO BE USED ON MAPS 22 AND 23

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1½″ ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.		
C2	PROP. APPROX. 1¼″ ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.		
C3	PROP. APPROX. 1″ ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.		
C4	PROP. APPROX. 1½″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.		
F1	AST MAT COAT #67 STONE		
F2	AST MAT COAT, #78M STONE		
R	CONCRETE STRUCTURE		
U	EXISTING PAVEMENT.		
V1	0 - 1½″ MILLING	V2	1¼″ MILLING
V3	1½″ MILLING		

$$$$$$SYSTIME$$$$
$$$$$$$$DGN$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$
$$$$$$USERNAME$$$$