


NCDOT TO RECONSTRUCT SHOULDERS


20'-22'  
VARIES

NCDOT TO RECONSTRUCT SHOULDERS

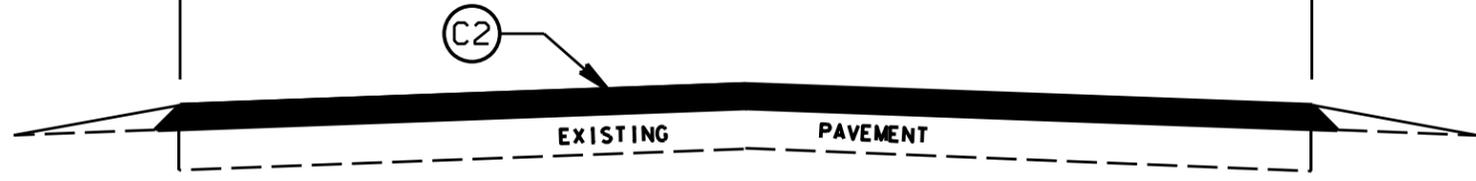


TYPICAL SECTION NO. 7

20'-33'  
VARIES

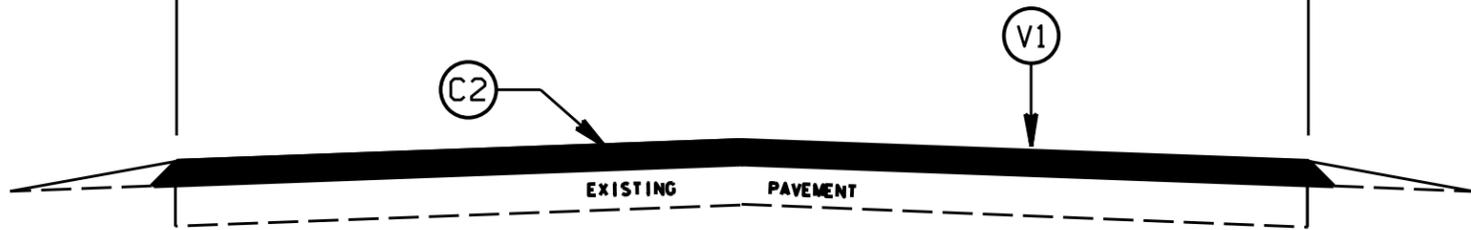


TYPICAL SECTION NO. 6


47'-50'  
VARIES

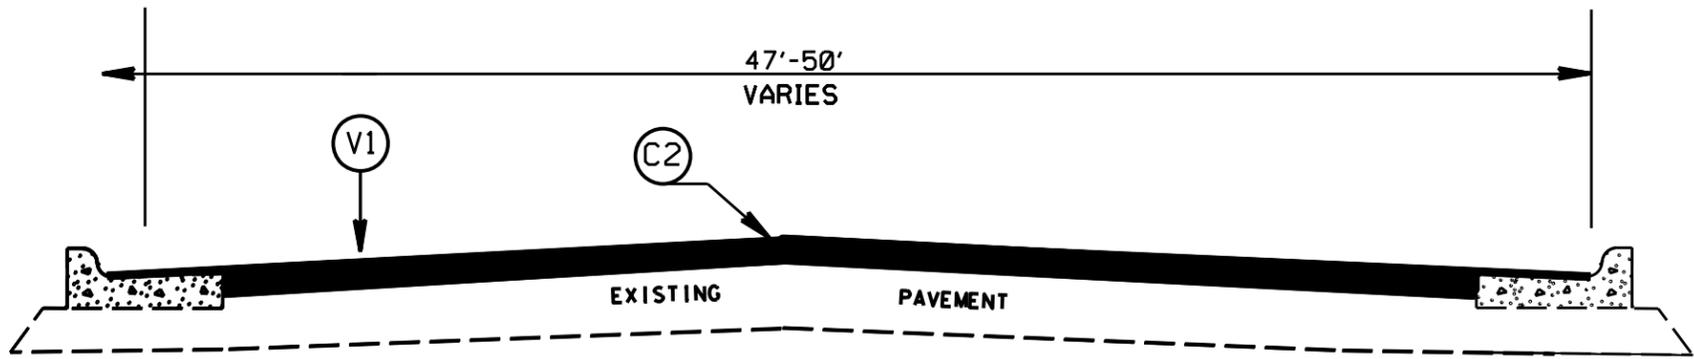

TYPICAL SECTION NO. 5  
Patching for Map # 1. Minimum depth of 6 inches  
As Directed by the Engineer

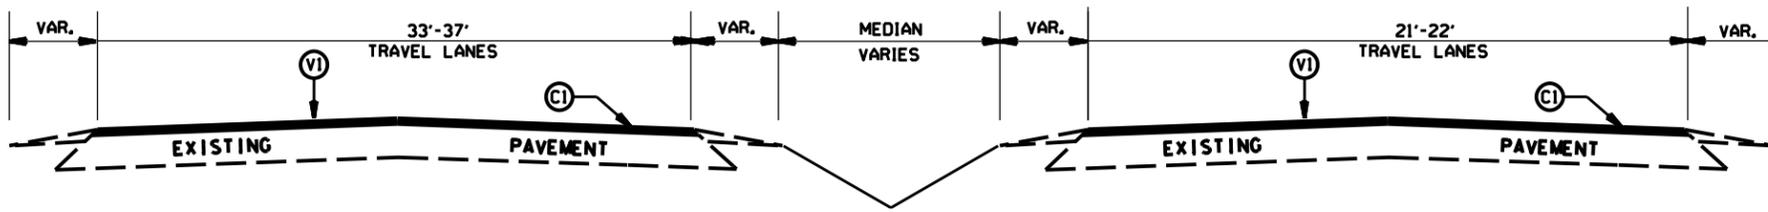


TYPICAL SECTION NO. 4

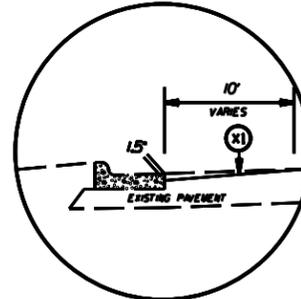

DETAIL FOR PROFILE MILLING (0" TO 1.5")

PATCHING DETAIL

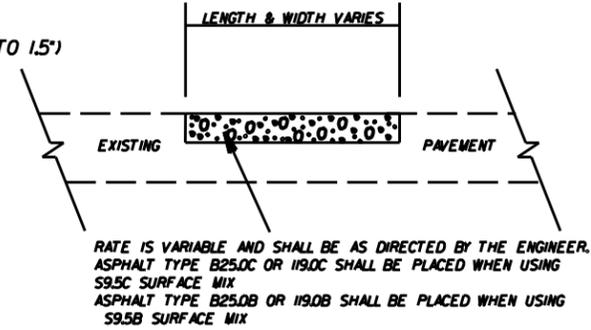

STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	10CR.10841.44, Etc.	5	
F.A. PROJECT NO.			

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D1	PROP. APPROX. 3.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
D2	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
E1	PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
E2	PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
T1	SHOULDER RECONSTRUCTION
V1	MILLING BITUMINOUS PAVEMENT 1.5" DEPTH.
V2	MILLING BITUMINOUS PAVEMENT 10.0" DEPTH.
X1	PROFILE MILLING BITUMINOUS PAVEMENT. 0" TO 1.5" DEPTH. AS DIRECTED BY THE ENGINEER

STANLY COUNTY  
RESURFACING 2015-2016

SCALE	DATE	DESIGNED BY	DESIGNED BY	APPROVED	REVISIONS
-BA-	4/15	JDA	JDA	MPW	

