

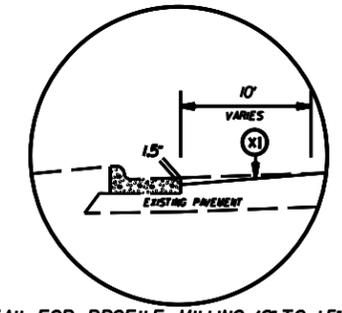


STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	IOCR.10841.44,Etc.	6	
F.A. PROJECT NO.			

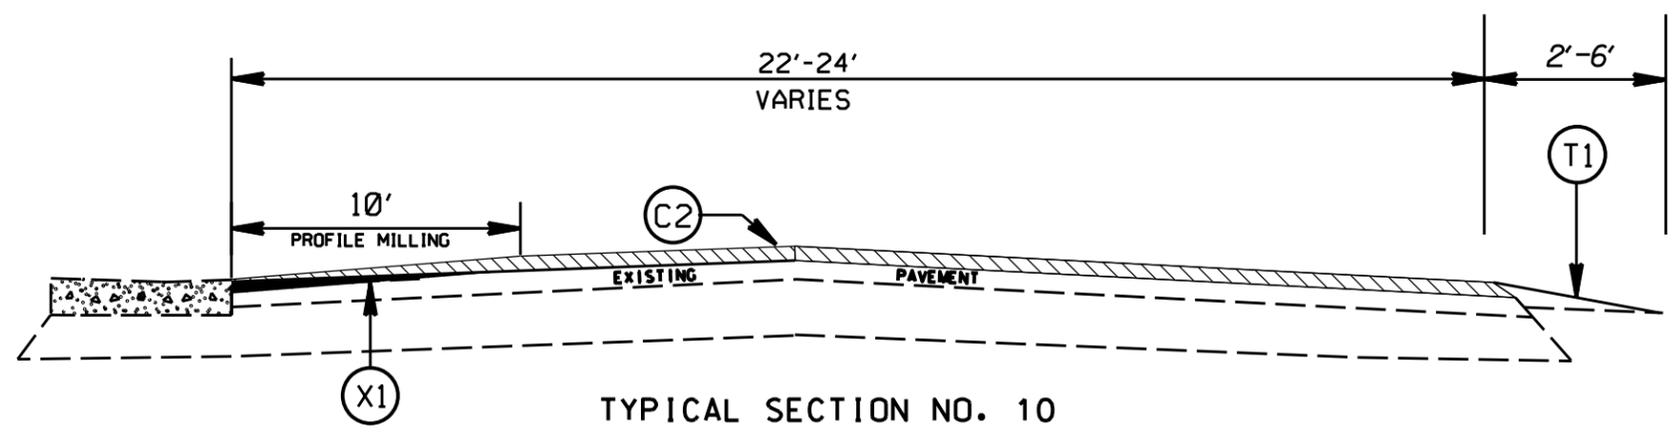


DETAIL FOR PROFILE MILLING (0' TO 1.5')

PATCHING DETAIL

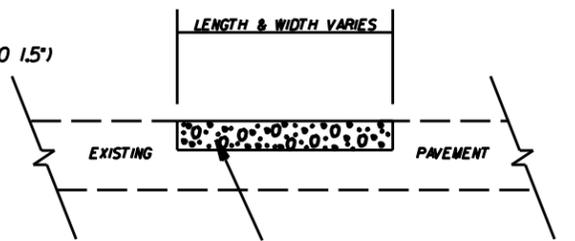


TYPICAL SECTION NO. 10

NOTE: CONTRACTOR OVERLAYS WITH 1.5" WHERE PAVEMENT WIDTH IS EXISTING 22' +/- AT BRIDGES OR AS DIRECTED BY THE ENGINEER

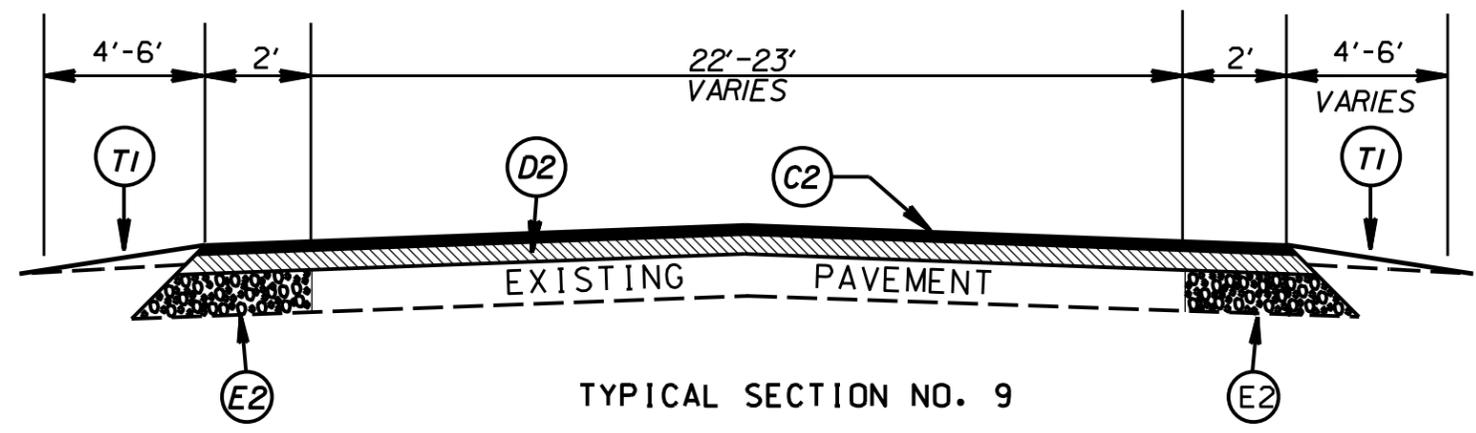

TYPICAL SECTION NO. 9

NOTE: WIDEN WHERE EXISTING ROAD IS 18 FEET+/-, CONTRACTOR DOES NOT WIDEN WHERE PAVEMENT WIDTH IS ALREADY EXISTING 22' AT PAVEMENT CHANGES OR AS DIRECTED BY THE ENGINEER

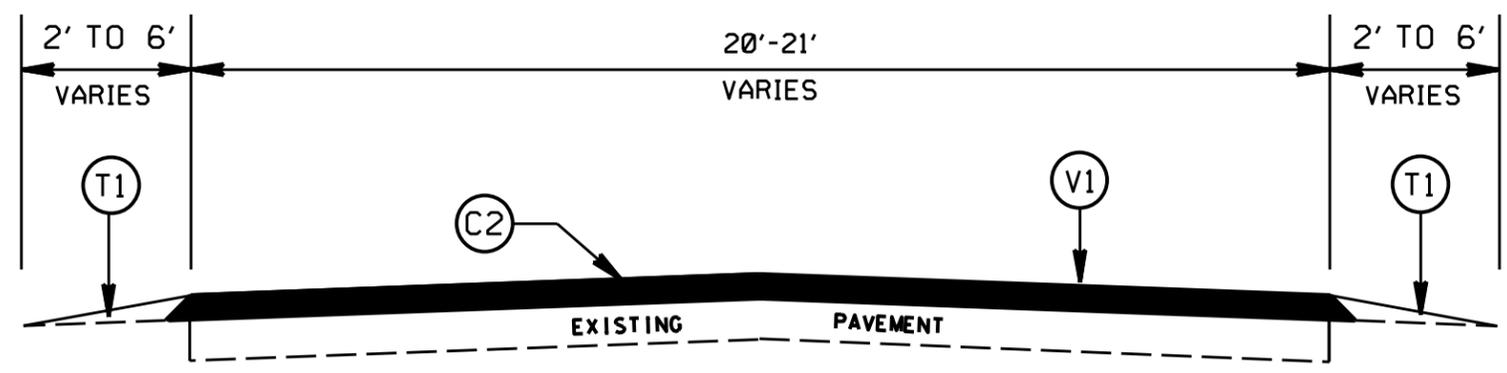

TYPICAL SECTION NO. 8

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D1	PROP. APPROX. 3.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
D2	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
E1	PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
E2	PROP. APPROX. 5.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
T1	SHOULDER RECONSTRUCTION
V1	MILLING BITUMINOUS PAVEMENT 1.5" DEPTH.
V2	MILLING BITUMINOUS PAVEMENT 10.0" DEPTH.
X1	PROFILE MILLING BITUMINOUS PAVEMENT. 0" TO 1.5" DEPTH. AS DIRECTED BY THE ENGINEER

STANLY COUNTY
RESURFACING 2015-2016

SCALE	-NA-		REVISIONS
DATE	4/15		
DRG. BY	JDA		
DESIGN BY	JDA		
APPROVED	MPW		