


High Speed Detection [≥40 mph (64 km/hr)]

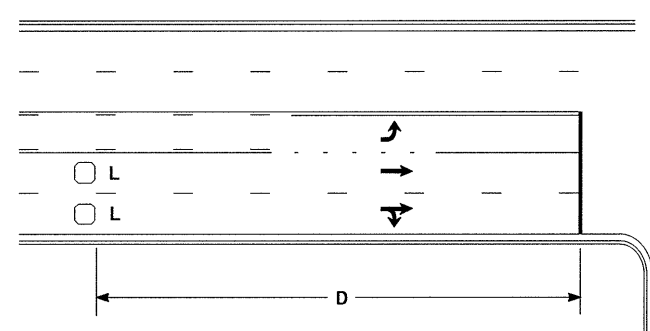


| Speed Limit mph (km/hr) | D ft (m) |
|----------------------------|-------------|
| 40 (64) | 250 (75) |
| 45 (72) | 300 (90) |
| 50 (80) | 355 (110) |
| 55 (88) | 420 (130) |

L = 6ft X 6ft (1.8m X 1.8m)
Wired in series for TS1
Controllers
Wired separately for TS2,
170, and 2070L Controllers

Volume Density Operation

OR

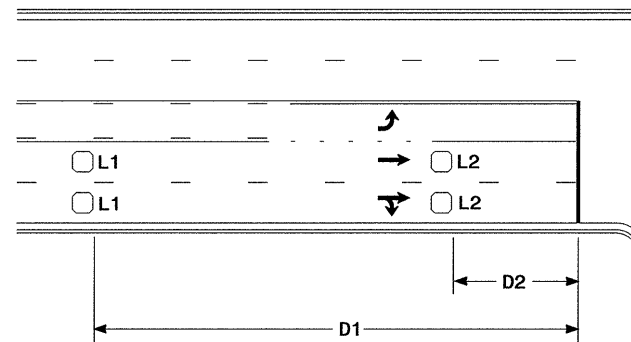


| Speed Limit mph (km/hr) | D1 ft (m) | D2 ft (m) |
|----------------------------|--------------|--------------|
| 40 (64) | 250 (75) | 80 (25) |
| 45 (72) | 300 (90) | 90 (27) |
| 50 (80) | 355 (110) | 100 (30) |
| 55 (88) | 420 (130) | 110 (35) |

L1 = 6ft X 6ft
(1.8m X 1.8m)
Wired in series
L2 = 6ft X 6ft
(1.8m X 1.8m)
Wired in series


"Stretch" Operation

Low Speed Detection [≤35 mph (56 km/hr)]

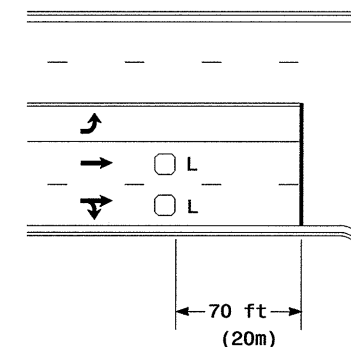


L = 6ft X 6ft (1.8m X 1.8m)
Wired in series

OR



L = 6ft X 40ft (1.8m X 12.0m)
Quadrupole loop, wired separately


Left Turn Lane Detection

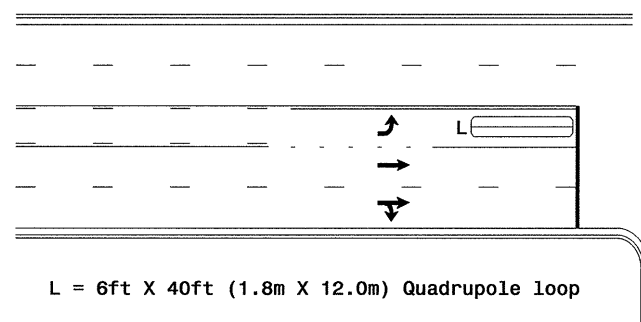

L = 6ft X 40ft (1.8m X 12.0m) Quadrupole loop

Presence Loop Detection


OR

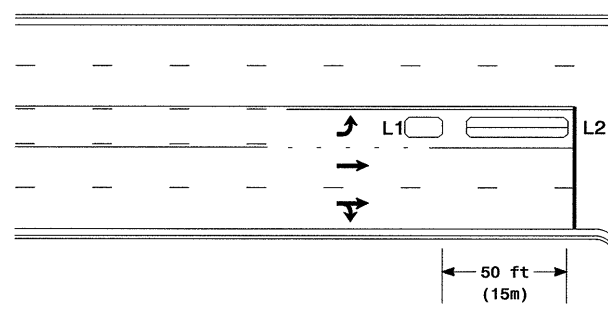

L1 = 6ft X 15ft (1.8m X 4.6m) Queue detector
L2 = 6ft X 40ft (1.8m X 12.0m) Quadrupole loop


Queue Loop Detection

Right Turn Lane Detection




Standard Turn

L1 = 6ft X 40ft (1.8m X 12.0m) Quadrupole loop
L2 = 6ft X 6ft (1.8m X 1.8m) [Minimum] Presence loop
Wired separately
L3 = 6ft X 20ft (1.8m X 6.0m) Quadrupole loop
Wired in series

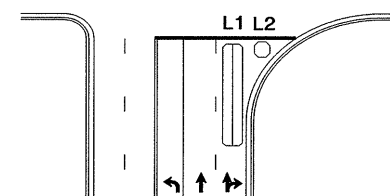


Wide Radius Turn

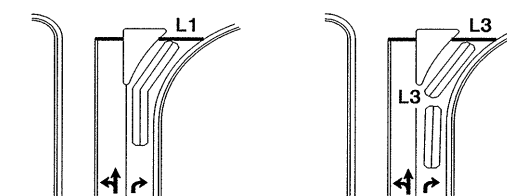

Channelized Turn


Side Street Detection



L = 6ft X 40ft (1.8m X 12.0m)
Quadrupole loop
Wired to separate
detectors/channels

Presence Loop Placement at Stop Lines

Locate loop slightly
behind leading
edge of stop line



Note:
Loop may be located in advance
of stop line when stop line is
greater than 15' (4.5m) from edge
of intersecting roadway; or, when
loop detects a permissive or
protected/permissive left turn.

Recommended Number of Turns

Single 6' X 6' (1.8m X 1.8m)
loop (wired separately):

| Length of Lead-in ft (m) | Number of Turns |
|--------------------------------|--------------------|
| < 250 (75) | 3 |
| 250-375 (75-115) | 4 |
| 375-525 (115-160) | 5 |
| > 525 (160) | 6 |

Quadrupole loops: Use 2-4-2 turns
6' X 15' (1.8m X 4.6m) Loops:
Lead-in < 150' (45 m), use 2 turns
Lead-in > 150' (45 m), use 3 turns

19-BEC-2006 14:29 s:\p1\sig\mot\sig1b_turn_inmill\sig1loop\typical\2006.dgn palexander

Typical Loop Locations

| | |
|--|-----------------------|
| PLAN DATE: June 2006 | REVIEWED BY: |
| PREPARED BY: P. L. Alexander | REVIEWED BY: |
| SCALE: N/A | INITIALS: [Signature] |
| REVISIONS: <i>Revise pavement markings</i> | DATE: 12/1/06 |

SIG. INVENTORY NO.