


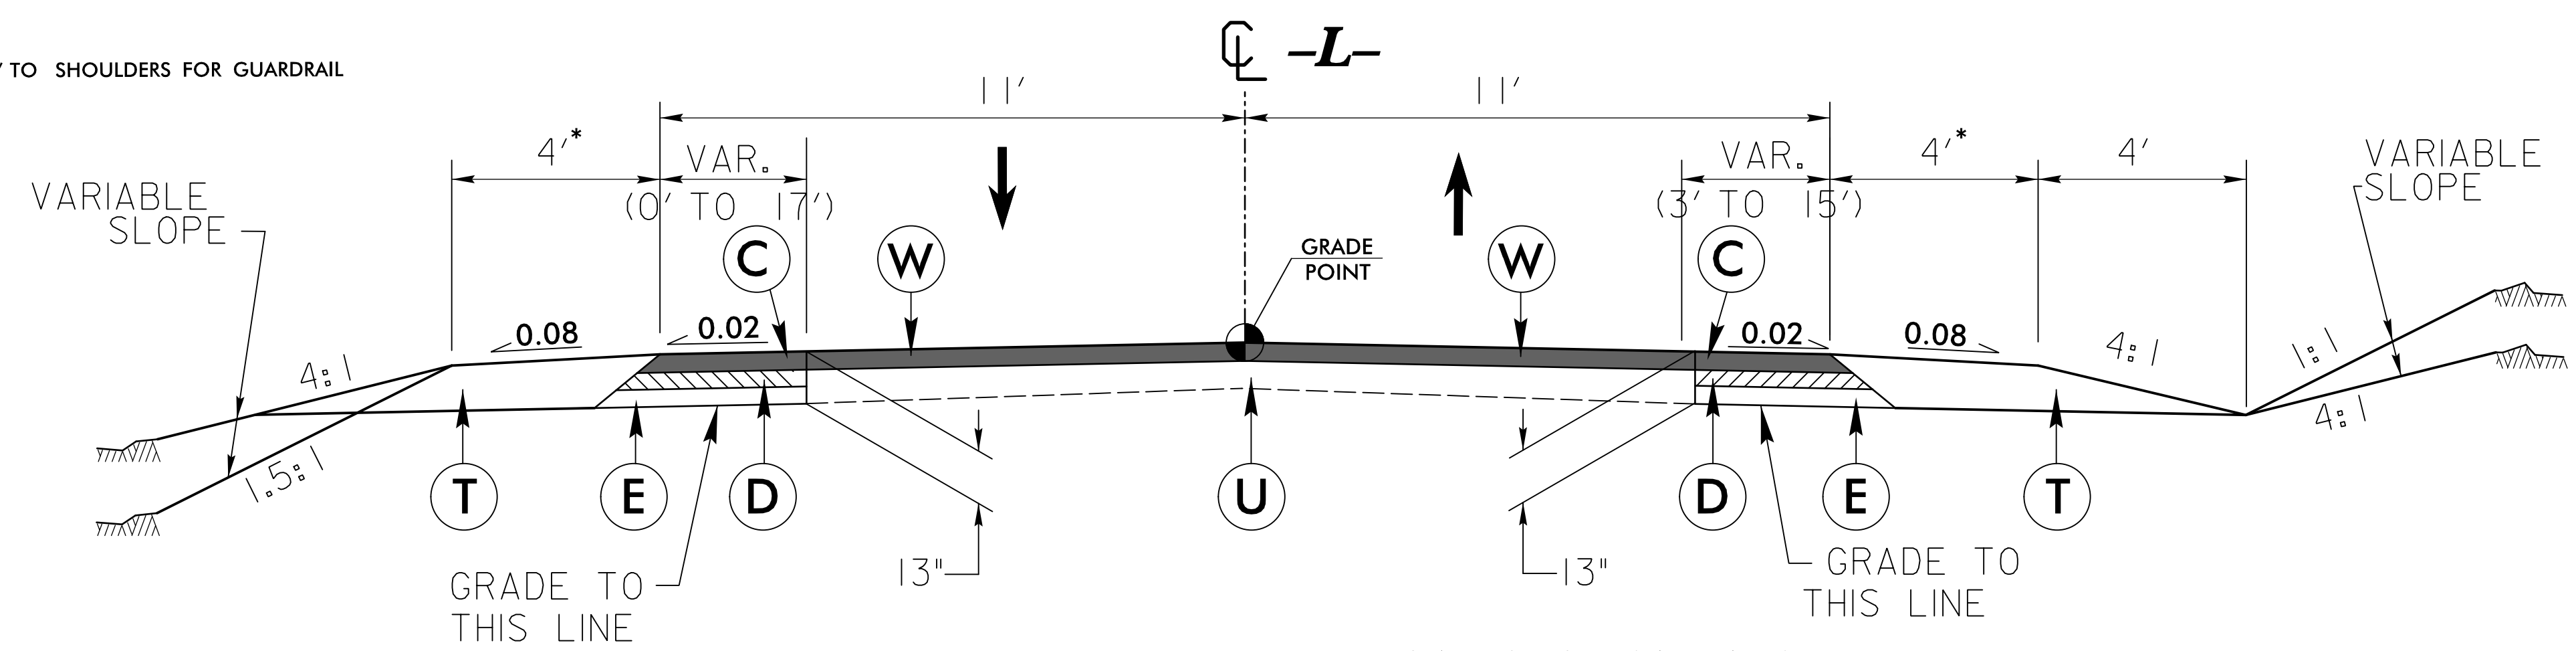



PROJECT REFERENCE NO. <b>R-5206</b>	SHEET NO. <b>2A-1</b>
RW SHEET NO.	
ROADWAY DESIGN ENGINEER 6/10/2015 	PAVEMENT DESIGN ENGINEER 6/12/2015 
	

\* ADD 3' TO SHOULDERS FOR GUARDRAIL

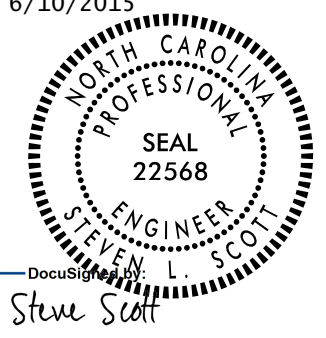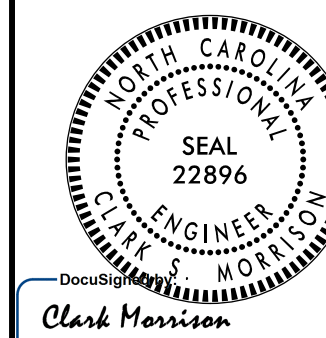

**TYPICAL SECTION NO. 1**


- L- STA. 15 + 34.38 TO 21 + 30.00
- L- STA. 23 + 00.00 TO 28 + 20.00
- L- STA. 30 + 70.00 TO 32 + 20.00
- L- STA. 35 + 25.00 TO 40 + 80.00
- L- STA. 48 + 25.00 TO 69 + 10.00
- L- STA. 71 + 15.19 TO 75 + 08.00

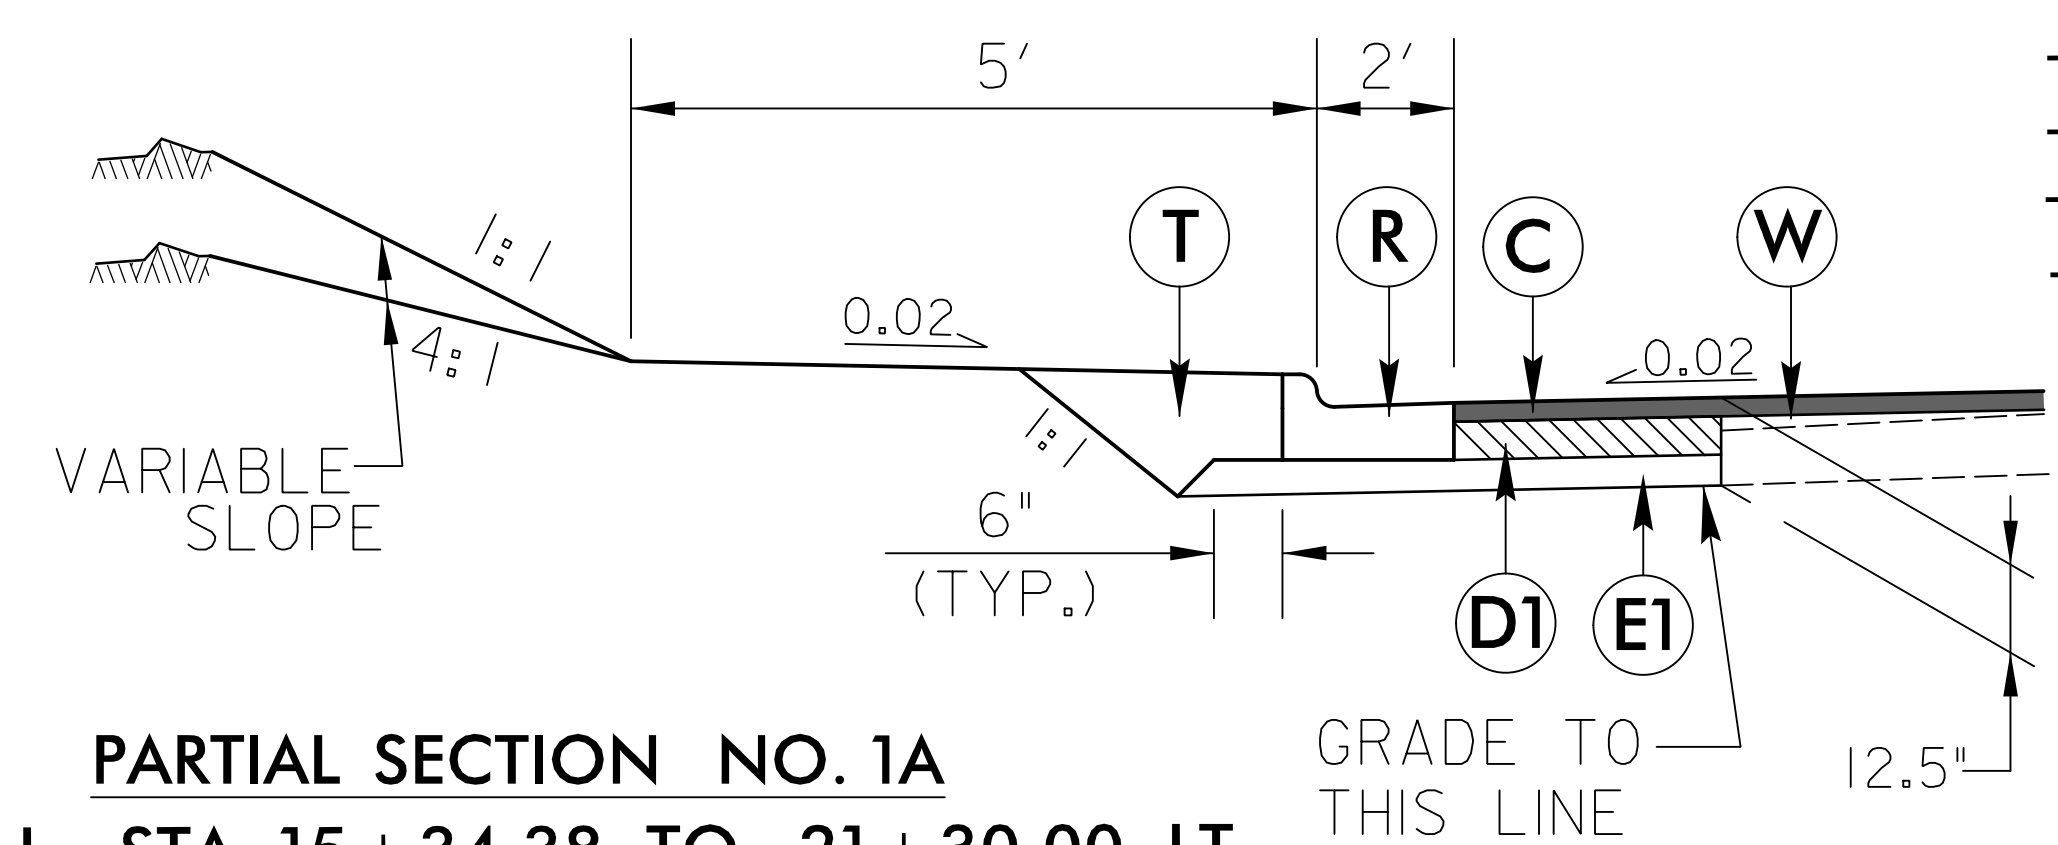

**PARTIAL SECTION NO. 1A**

- L- STA. 15 + 34.38 TO 21 + 30.00 LT.
- L- STA. 23 + 00.00 TO 27 + 62.59 LT.
- L- STA. 67 + 50.35 TO 68 + 59.96 LT.
- L- STA. 64 + 29.31 TO 64 + 80.00 LT.
- L- STA. 66 + 10.00 TO 66 + 24.23 LT.


**PROPOSED RETAINING WALL**

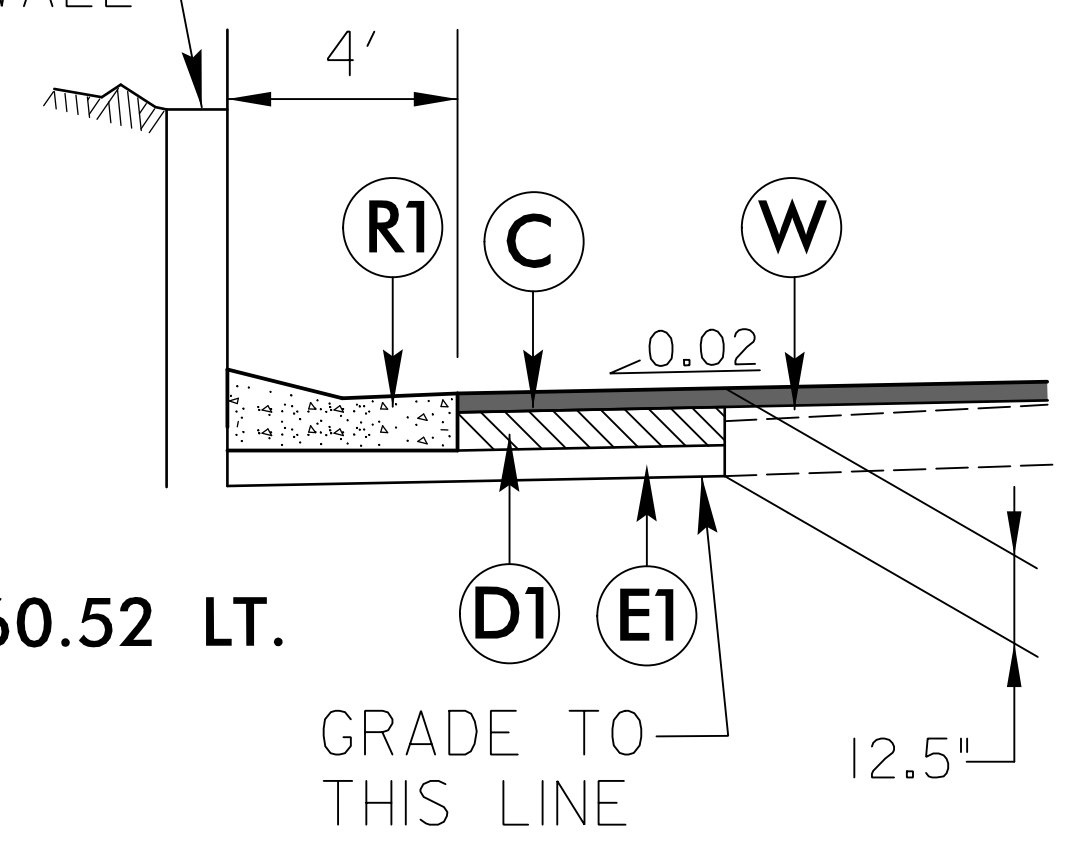

**PARTIAL SECTION NO. 1C**

- L- STA. 52 + 92.52 TO 56 + 60.52 LT.


**PROPOSED RETAINING WALL**

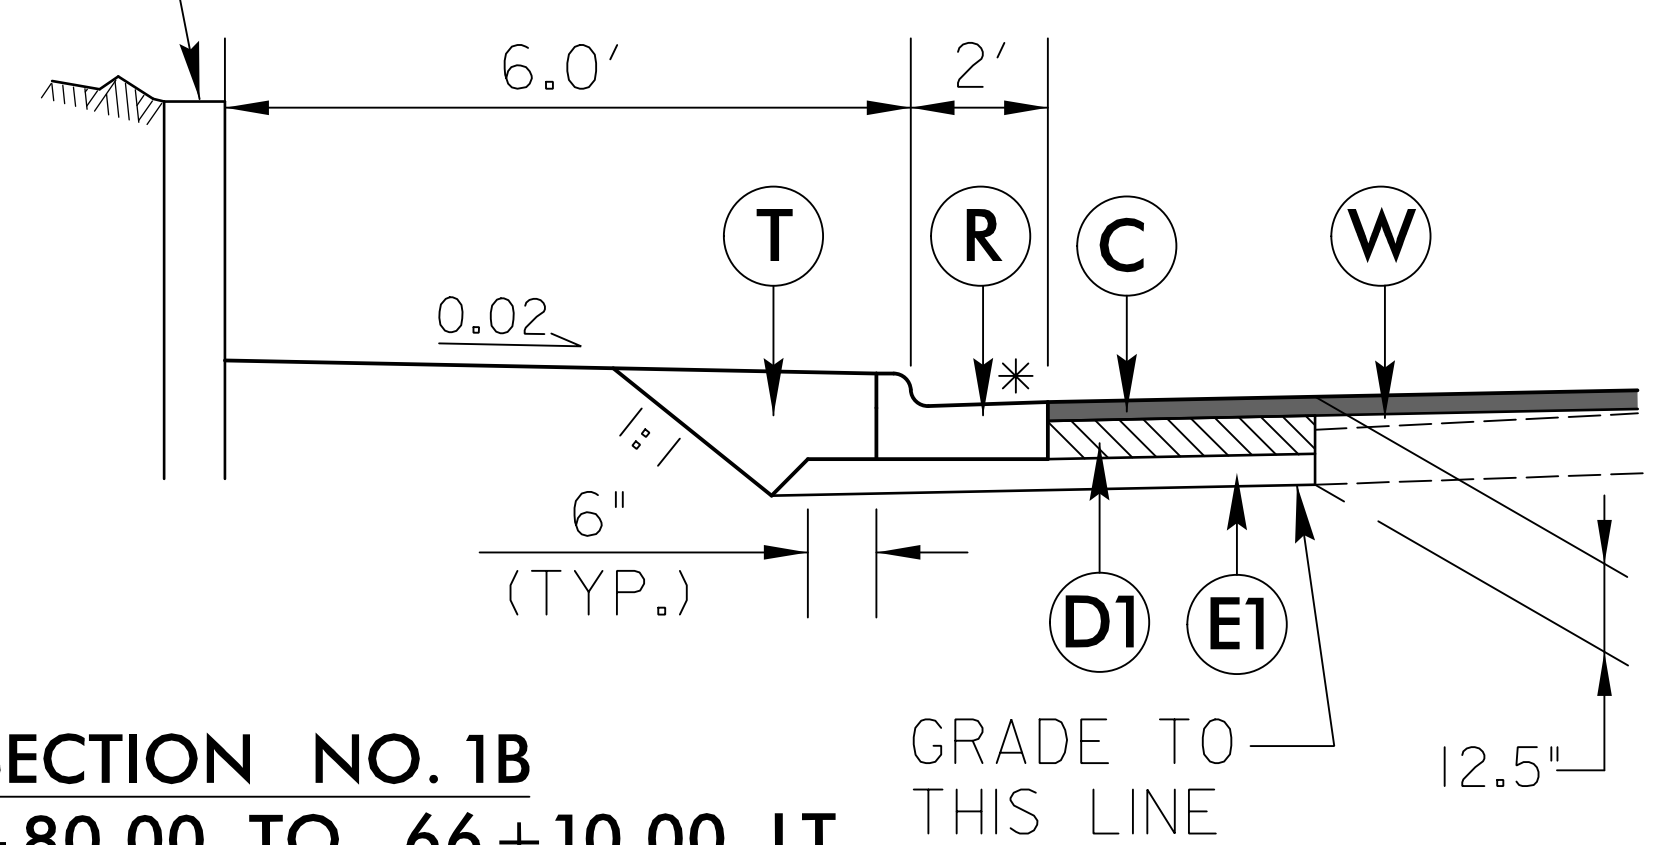

**PARTIAL SECTION NO. 1B**

- L- STA. 64 + 80.00 TO 66 + 10.00 LT.
- \*USE 2% IN THE GUTTER PAN FROM STA. 64 + 80.00 STA. 65 + 56 + .29

**SHOULDER WIDENING VAR. 2' TO 4.8'**

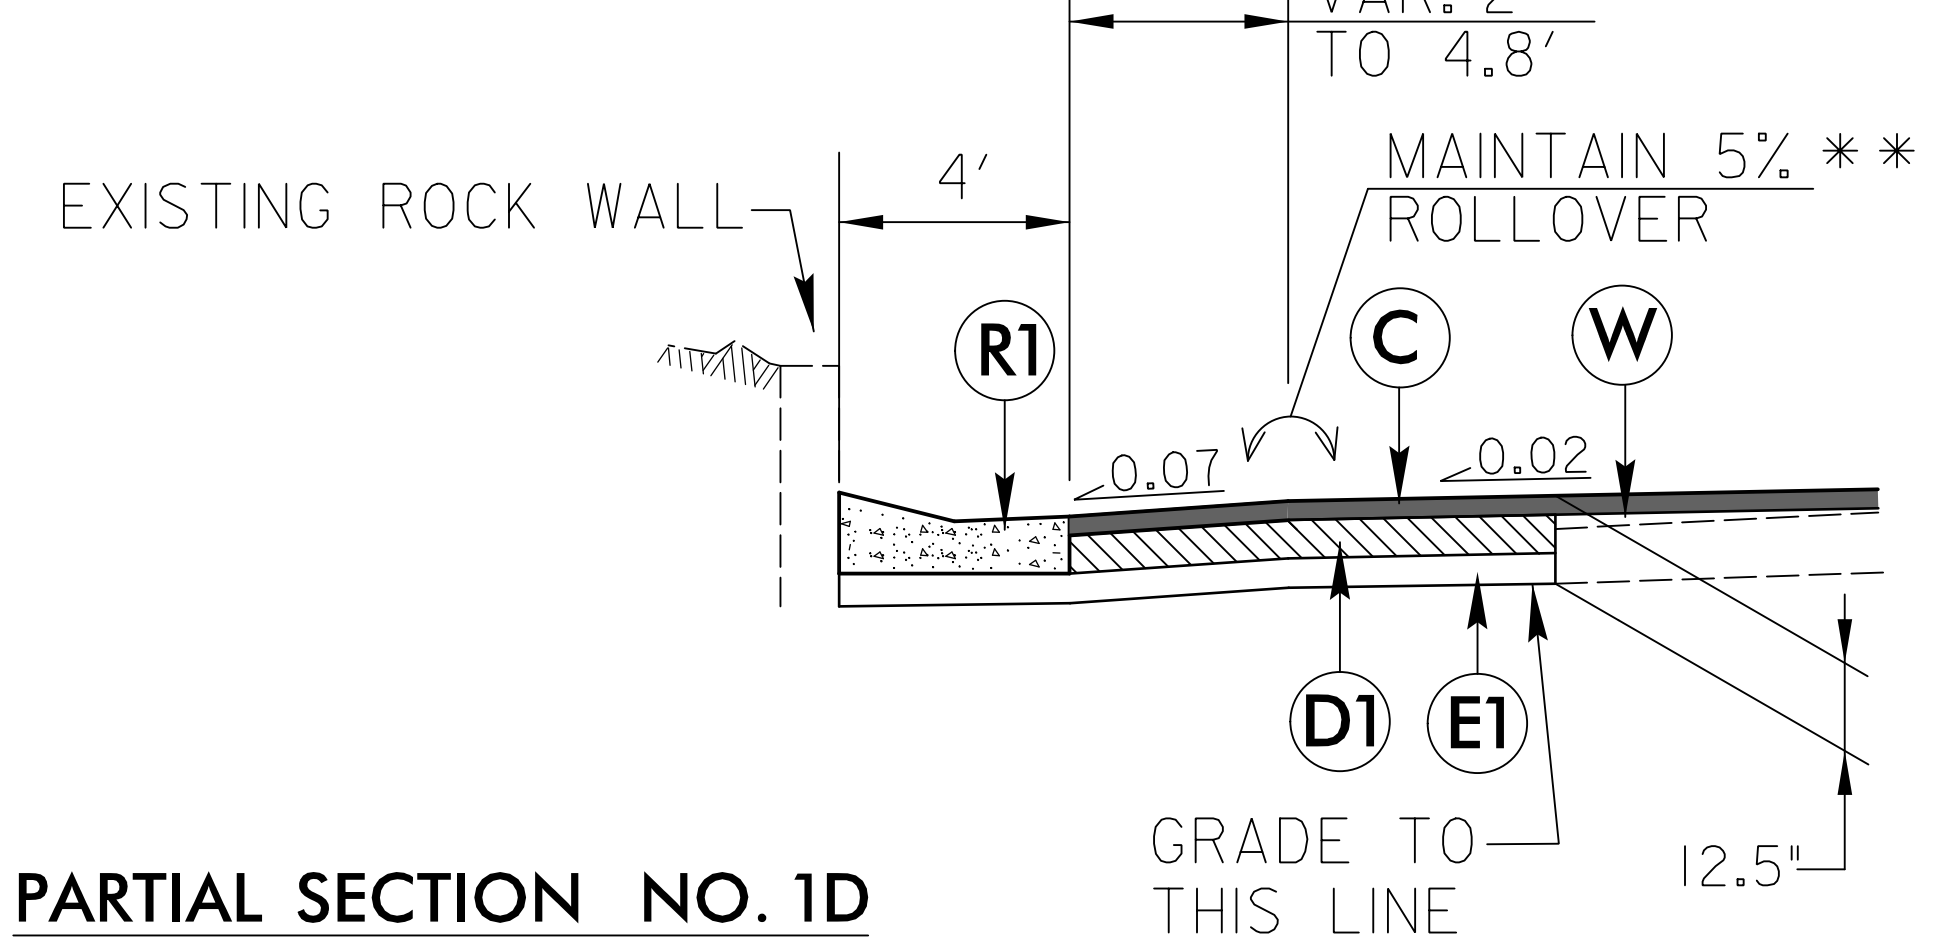

**PARTIAL SECTION NO. 1D**

- L- STA. 62 + 50.00 TO 64 + 00.00 LT.
- \*\* -L- STA. 33 + 50.00 TO 34 + 17.43 RT.

PAVEMENT SCHEDULE	
C	PROP. APP. 2 IN. ASPH. CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS/SY IN
C1	PROP. VAR. DEPTH ASPH. CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS/SY/IN. DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 2.0 IN. IN DEPTH
D	PROP. APP. 3 IN. ASPH. CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 342 LBS/SY
D1	PROP. APP. 5 IN. ASPH. CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS/SY IN EACH OF TWO LAYERS
D2	PROP. VAR. DEPTH ASPH. CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS/SY/IN. DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 2.5 IN. OR GREATER THAN 4 IN. DEPTH
E	PROP. APP. 8 IN. ASPH. CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS/SY IN EACH OF TWO LAYERS
E1	PROP. APP. 5.5 IN. ASPH. CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS/SY
E2	PROP. VAR. DEPTH ASPH. CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS/SY/IN. DEPTH TO BE PLACED IN LAYERS NOT GREATER THAN 5.5 IN. OR LESS THAN 3 IN. DEPTH
J	PROP. 6 IN. AGGREGATE BASE COURSE
J1	PROP. 8 IN. AGGREGATE BASE COURSE
J2	VARIABLE ABC
P	PRIME COAT AT A RATE OF 0.35 GAL/SY
R	2'-6" CURB AND GUTTER
R1	CONC. EXPRESSWAY GUTTER
R2	SHOULDER BERM GUTTER
T	EARTH MATERIAL
U	EXISTING PAVEMENT
W	WEDGING

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

NOT TO SCALE

5/14/09