


1 QUANTITY = 850.0 SQ FT
 TEMPORARY SHORING
 FROM -L- STA. 161+10+/-, 0.5' LT
 TO -L- STA. 162+10+/-, 0.5' LT

UTILIZE A TRENCHLESS INSTALLATION METHOD TO INSTALL THE PROPOSED CROSS PIPE UNDER EXISTING -L-. THE REMAINDER OF THE PROPOSED PIPE CAN BE INSTALLED BY OPEN CUT METHOD.

MATCHLINE SEE SHEET TMP-05
 -L- STA. 168+50

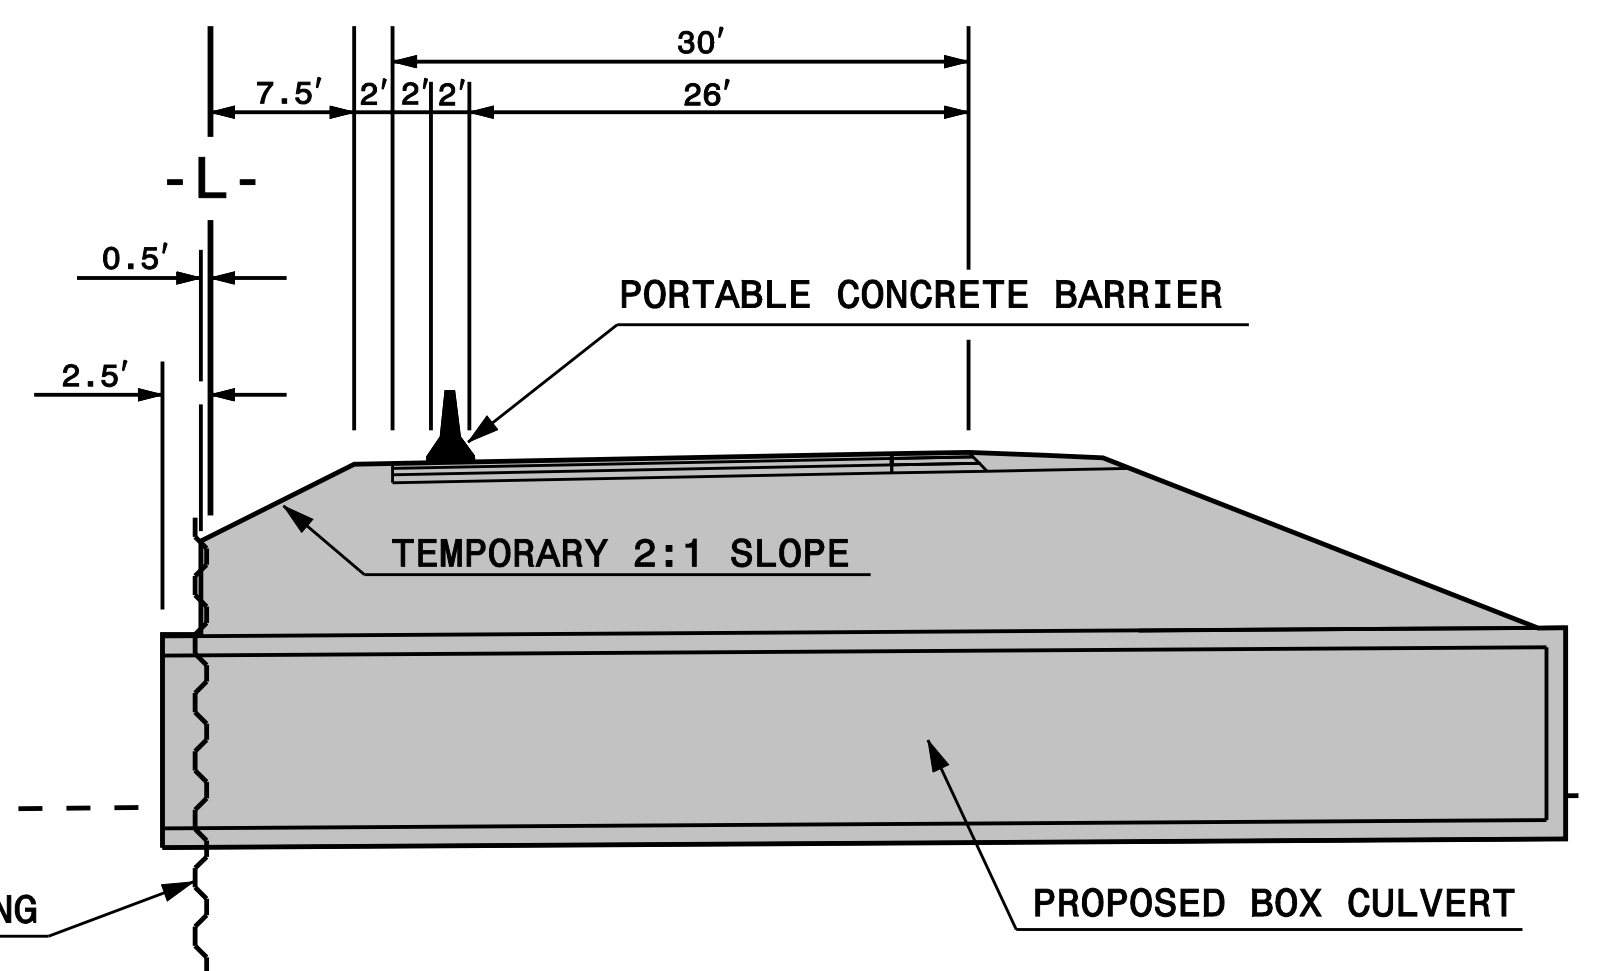

SECTION A-A
 161+50 -L-

NOTE:
 ALL PAVEMENT MARKINGS ARE EXISTING MARKINGS UNLESS OTHERWISE NOTED

<p>PLAN PREPARED IN THE OFFICE OF: PROGRESSIVE DESIGN GROUP, INC. ENGINEERS • CONSULTANTS</p>	<p>APPROVED: <i>Tommy</i> DATE: 7/22/2015 SEAL</p>	 DIVISION OF HIGHWAYS STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION WORK ZONE TRAFFIC CONTROL	<p>TRANSPORTATION MANAGEMENT PLAN PHASE I DETAILS</p>
--	---	--	---