



STRUCTURE RECOMMENDATIONS

DESIGN DATA	-L-	-Y-
2015 ADT	25,000	27,000
2035 ADT	28,600	36,400
DHV (%)	10	10
D (%)	60	60
DUAL (%)	3	6
TTST (%)	2	7
V (MPH)	40	60
FUNC CLASS	ARTERIAL	FREEWAY

MINIMUM VERTICAL CLEARANCE = 16'-6"
 SKEW ANGLE = 89° 37' 49.98"
 * SINGLE FACED PRECAST CONCRETE BARRIER (SEE STD. 857.01)
 ** TO ACCOMMODATE FUTURE LANE
 [X] RETAINING WALL DETERMINED BY GEOTECHNICAL ENGINEERING UNIT

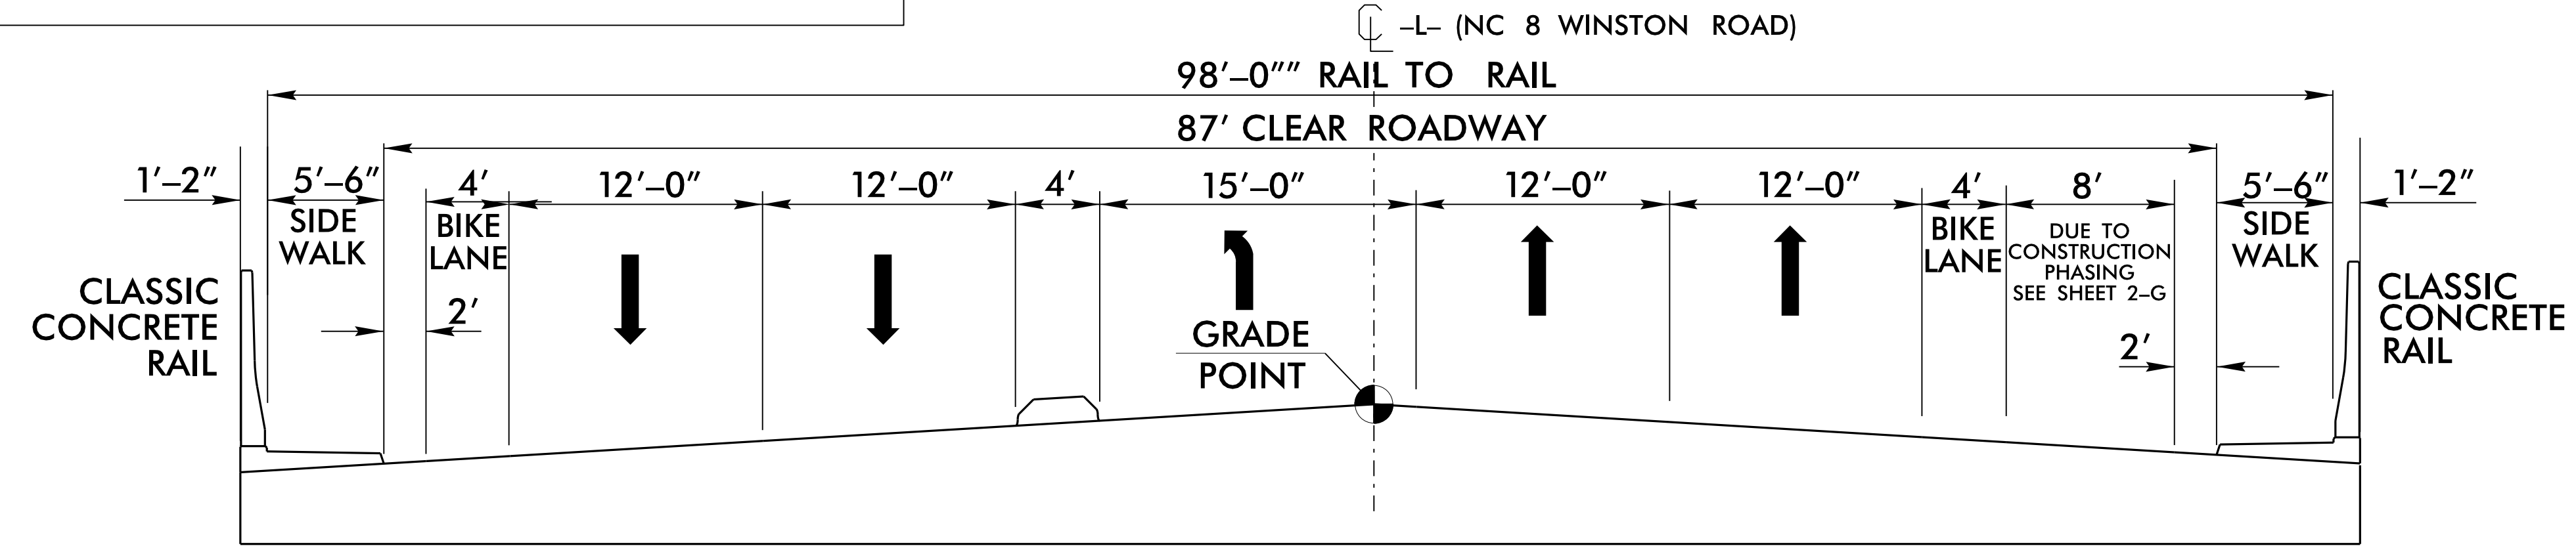

-L- (NC 8) STRUCTURE OVER -Y- (US 29-64-70 /I-85 BUS)
 -L- STA. 12+66.97 TO -L- STA. 14+16.47

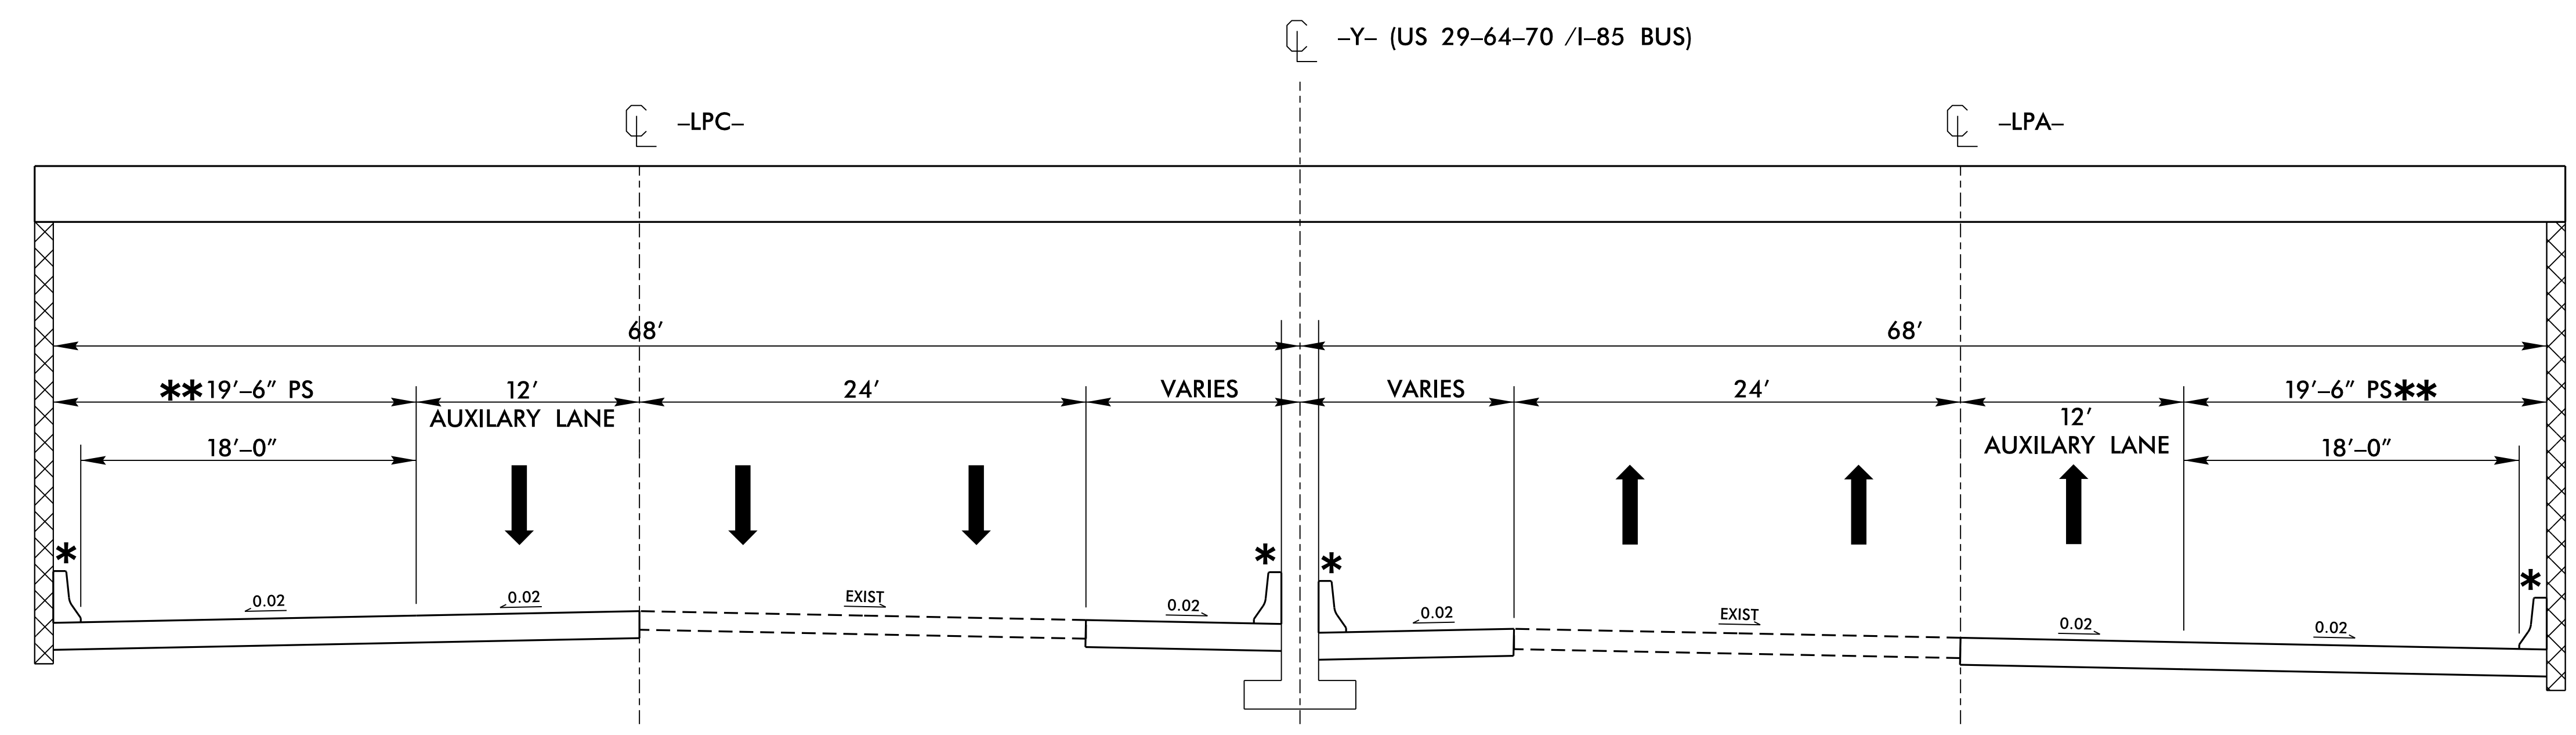

DETAIL OF ROADWAY UNDER PROPOSED STRUCTURE

NOTES:
 SEE SHEET 4 FOR PLAN VIEW
 SEE SHEET 2A-3 FOR -L- TYPICAL SECTION
 SEE SHEET 2A-4 FOR -Y- TYPICAL SECTION

8/17/99
 23 JUL 2015 07:48 P3159_Rdy_psh_tup_02A-7.dgn
 34850512015071707