

PHASING DIAGRAM



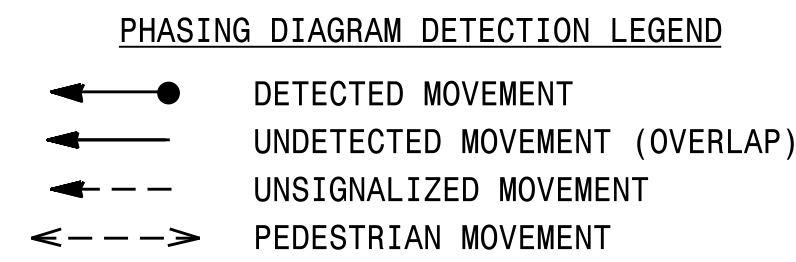


TABLE OF OPERATION

SIGNAL FACE	PHASE			
	01+6	02+6	04+8	01+6
11	F	F	R	Y
21	F	F	R	Y
22, 23	R	G	R	Y
41, 42	R	R	G	R
61, 62	G	G	R	Y
81, 82	R	R	G	R

SIGNAL FACE I.D.

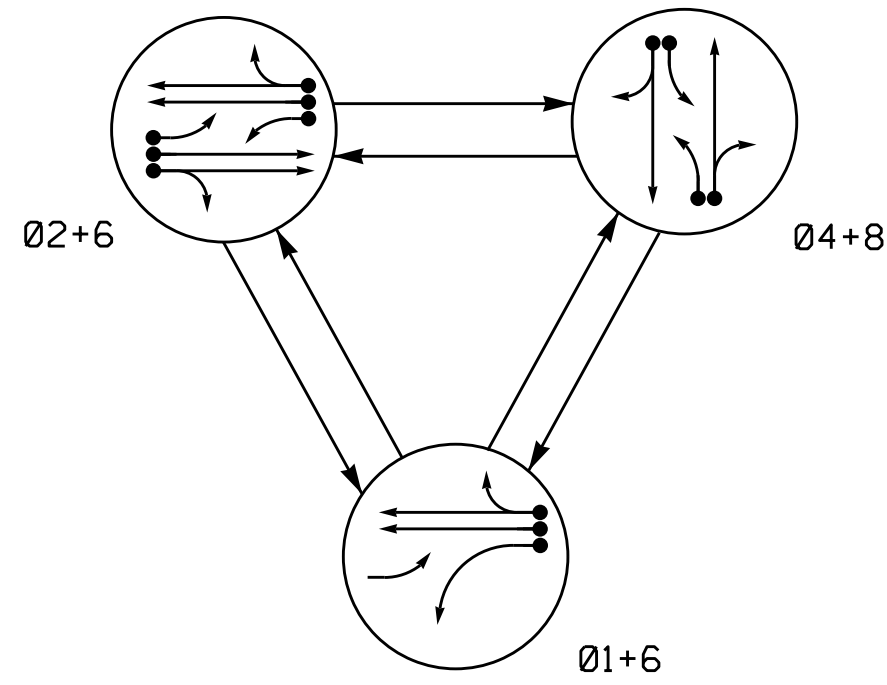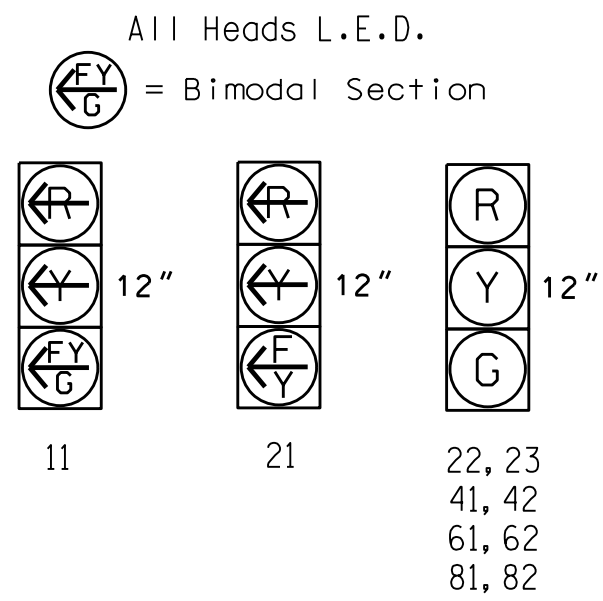


OASIS 2070 LOOP & DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	DETECTOR PROGRAMMING					SYSTEM LOOP	NEW CARD	
					PHASE	CALLING	EXTENSION	FULL TIME DELAY	STRETCH TIME			DELAY TIME
1A	6X40	0	2-4-2	-	1	Y	Y	-	-	15	-	Y
					6	Y	Y	-	-	-	-	Y
2A, 2B	6X6	70	EXIST	-	2	Y	Y	-	-	-	-	Y
2C	6X40	0	2-4-2	-	2	Y	Y	-	-	-	-	Y
4A	6X40	+5	2-4-2	-	4	Y	Y	-	-	3	-	Y
4B	6X40	0	2-4-2	-	4	Y	Y	-	-	-	-	Y
6A, 6B	6X6	70	EXIST	-	6	Y	Y	-	-	-	-	Y
8A, 8B	6X40	0	2-4-2	-	8	Y	Y	-	-	5	-	Y
S1	6X6	+345	EXIST	-	-	-	-	-	-	-	-	Y

3 Phase Fully Actuated (High Point Signal System)

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2012 and "Standard Specifications for Roads and Structures" dated January 2012.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 may be lagged.
- Set all detector units to presence mode.
- In the event of loop replacement, refer to the current ITS and Signals Design Manual and submit a Plan of Record to the Signal Design Section.
- Locate new cabinet so as not to obstruct sight distance of vehicles turning right on red.
- Existing Left Arrow "ONLY" signs (R3-5L) may be removed at the direction of the Engineer.
- Pavement markings are existing.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

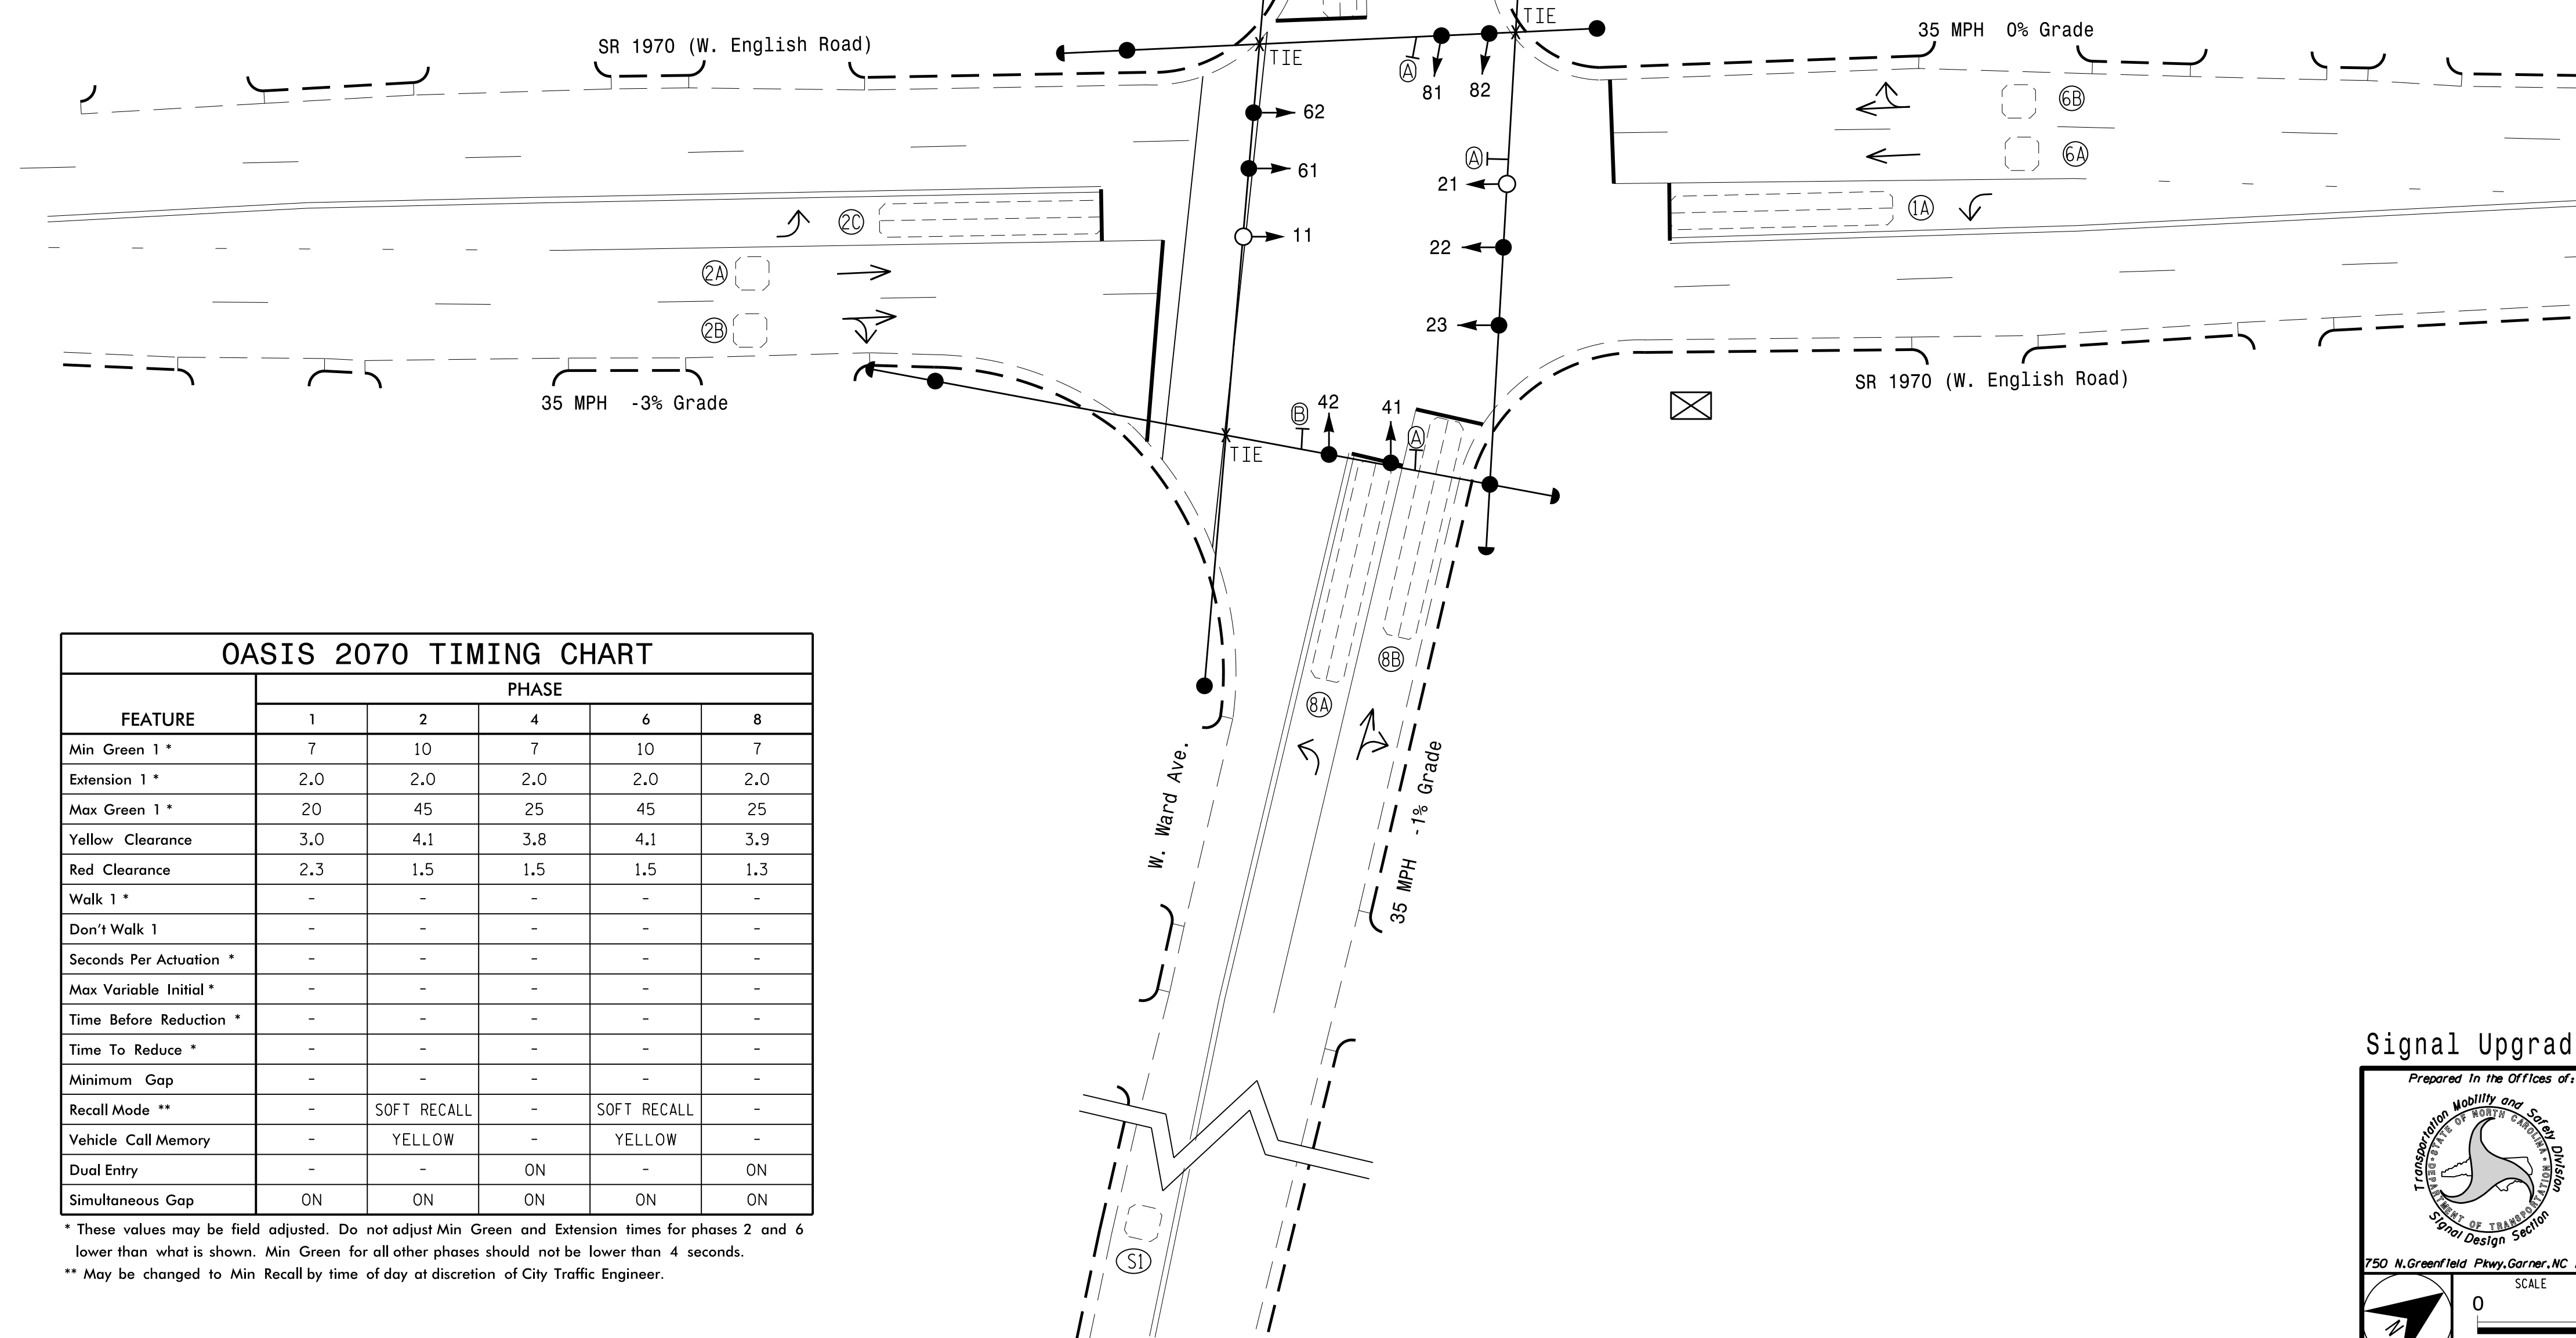


OASIS 2070 TIMING CHART

FEATURE	PHASE				
	1	2	4	6	8
Min Green 1 *	7	10	7	10	7
Extension 1 *	2.0	2.0	2.0	2.0	2.0
Max Green 1 *	20	45	25	45	25
Yellow Clearance	3.0	4.1	3.8	4.1	3.9
Red Clearance	2.3	1.5	1.5	1.5	1.3
Walk 1 *	-	-	-	-	-
Don't Walk 1	-	-	-	-	-
Seconds Per Actuation *	-	-	-	-	-
Max Variable Initial *	-	-	-	-	-
Time Before Reduction *	-	-	-	-	-
Time To Reduce *	-	-	-	-	-
Minimum Gap	-	-	-	-	-
Recall Mode **	-	SOFT RECALL	-	SOFT RECALL	-
Vehicle Call Memory	-	YELLOW	-	YELLOW	-
Dual Entry	-	-	ON	-	ON
Simultaneous Gap	ON	ON	ON	ON	ON

\* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.  
 \*\* May be changed to Min Recall by time of day at discretion of City Traffic Engineer.

LEGEND

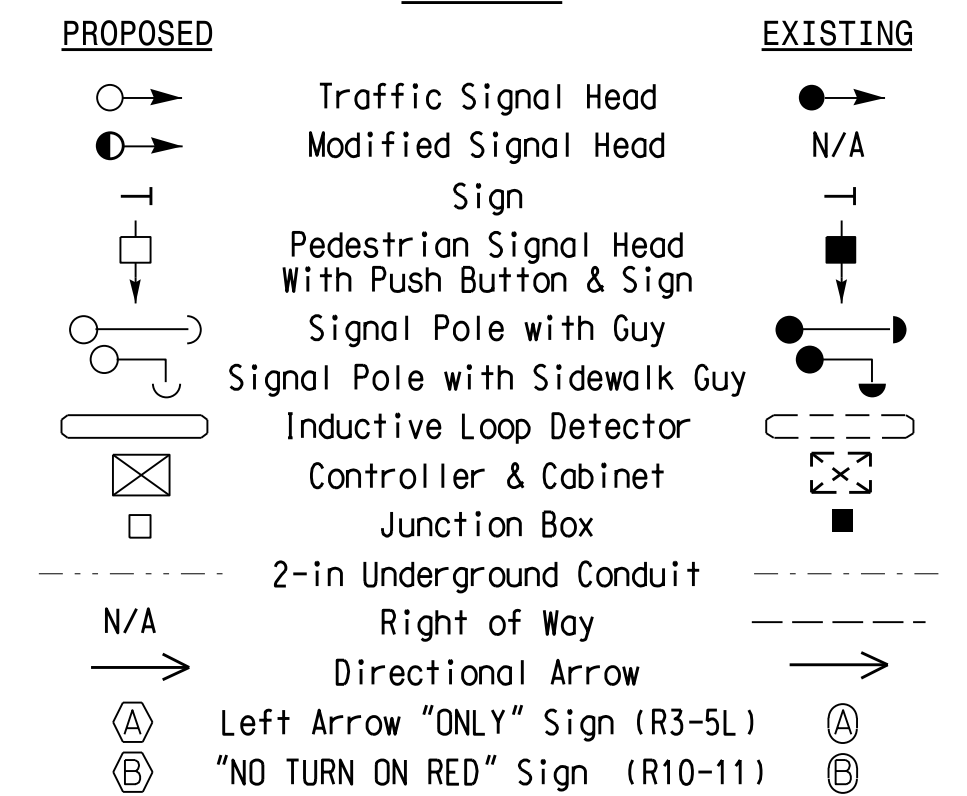

Signal Upgrade

SR 1970 (W. English Rd.) at Ward Ave.

Division 7 Guilford County High Point

PLAN DATE: August 2014 PREPARED BY: Jeff Spence

PREPARED BY: L.D. Young REVIEWED BY:

SEAL

ROBERT J. ZIEMBA

026486

4/23/2015

SIG. INVENTORY NO. 07-0777

750 N. Greenfield Pkwy, Garner, NC 27529

SCALE 0 20 1"=20'

23-APR-2015 10:23  
 S:\IT\SSU\ITS\Signal\Central\Region04\iv 74c-5558 High Point\Signal Plans\07-0777\070777\_s1a.dsn\_20150423.dgn  
 rz1:beno