


PHASING DIAGRAM

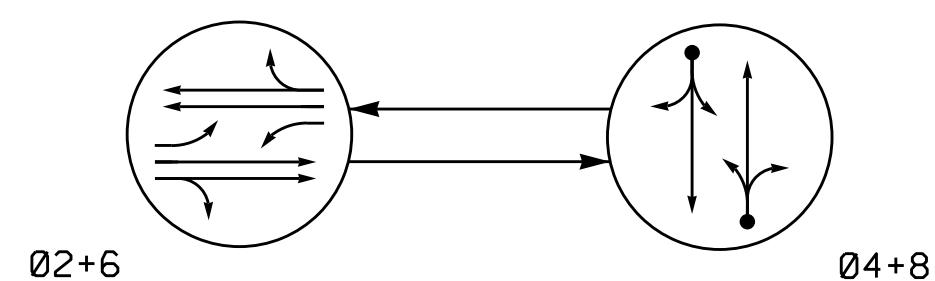

PHASING DIAGRAM DETECTION LEGEND


- ● DETECTED MOVEMENT
- UNDETECTED MOVEMENT (OVERLAP)
- - - UNSIGNALIZED MOVEMENT
- - - - PEDESTRIAN MOVEMENT

TABLE OF OPERATION

SIGNAL FACE	PHASE		
	Ø2+6	Ø4+8	FLIGHT
21, 22, 23	G	R	Y
41, 42	R	G	R
61, 62, 63	G	R	Y
81, 82	R	G	R

SIGNAL FACE I.D.

All Heads L.E.D.



21, 22, 23
41, 42
61, 62, 63
81, 82


OASIS 2070 LOOP & DETECTOR INSTALLATION CHART

LOOP	INDUCTIVE LOOPS			DETECTOR PROGRAMMING					SYSTEM LOOP	NEW CARD		
	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	PHASE	CALLING	EXTENSION	FULL TIME DELAY	STRETCH TIME			DELAY TIME	
4A	6X40	0	2-4-2	-	4	Y	Y	-	-	3	-	Y
8A	6X40	0	2-4-2	-	8	Y	Y	-	-	10	-	Y

**2 Phase
Semi-Actuated
(High Point Signal System)**

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2012 and "Standard Specifications for Roads and Structures" dated January 2012.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Set all detector units to presence mode.
- In the event of loop replacement, refer to the current ITS and Signals Design Manual and submit a Plan of Record to the Signal Design Section.
- Locate new cabinet so as not to obstruct sight distance of vehicles turning right on red.
- Pavement markings are existing.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

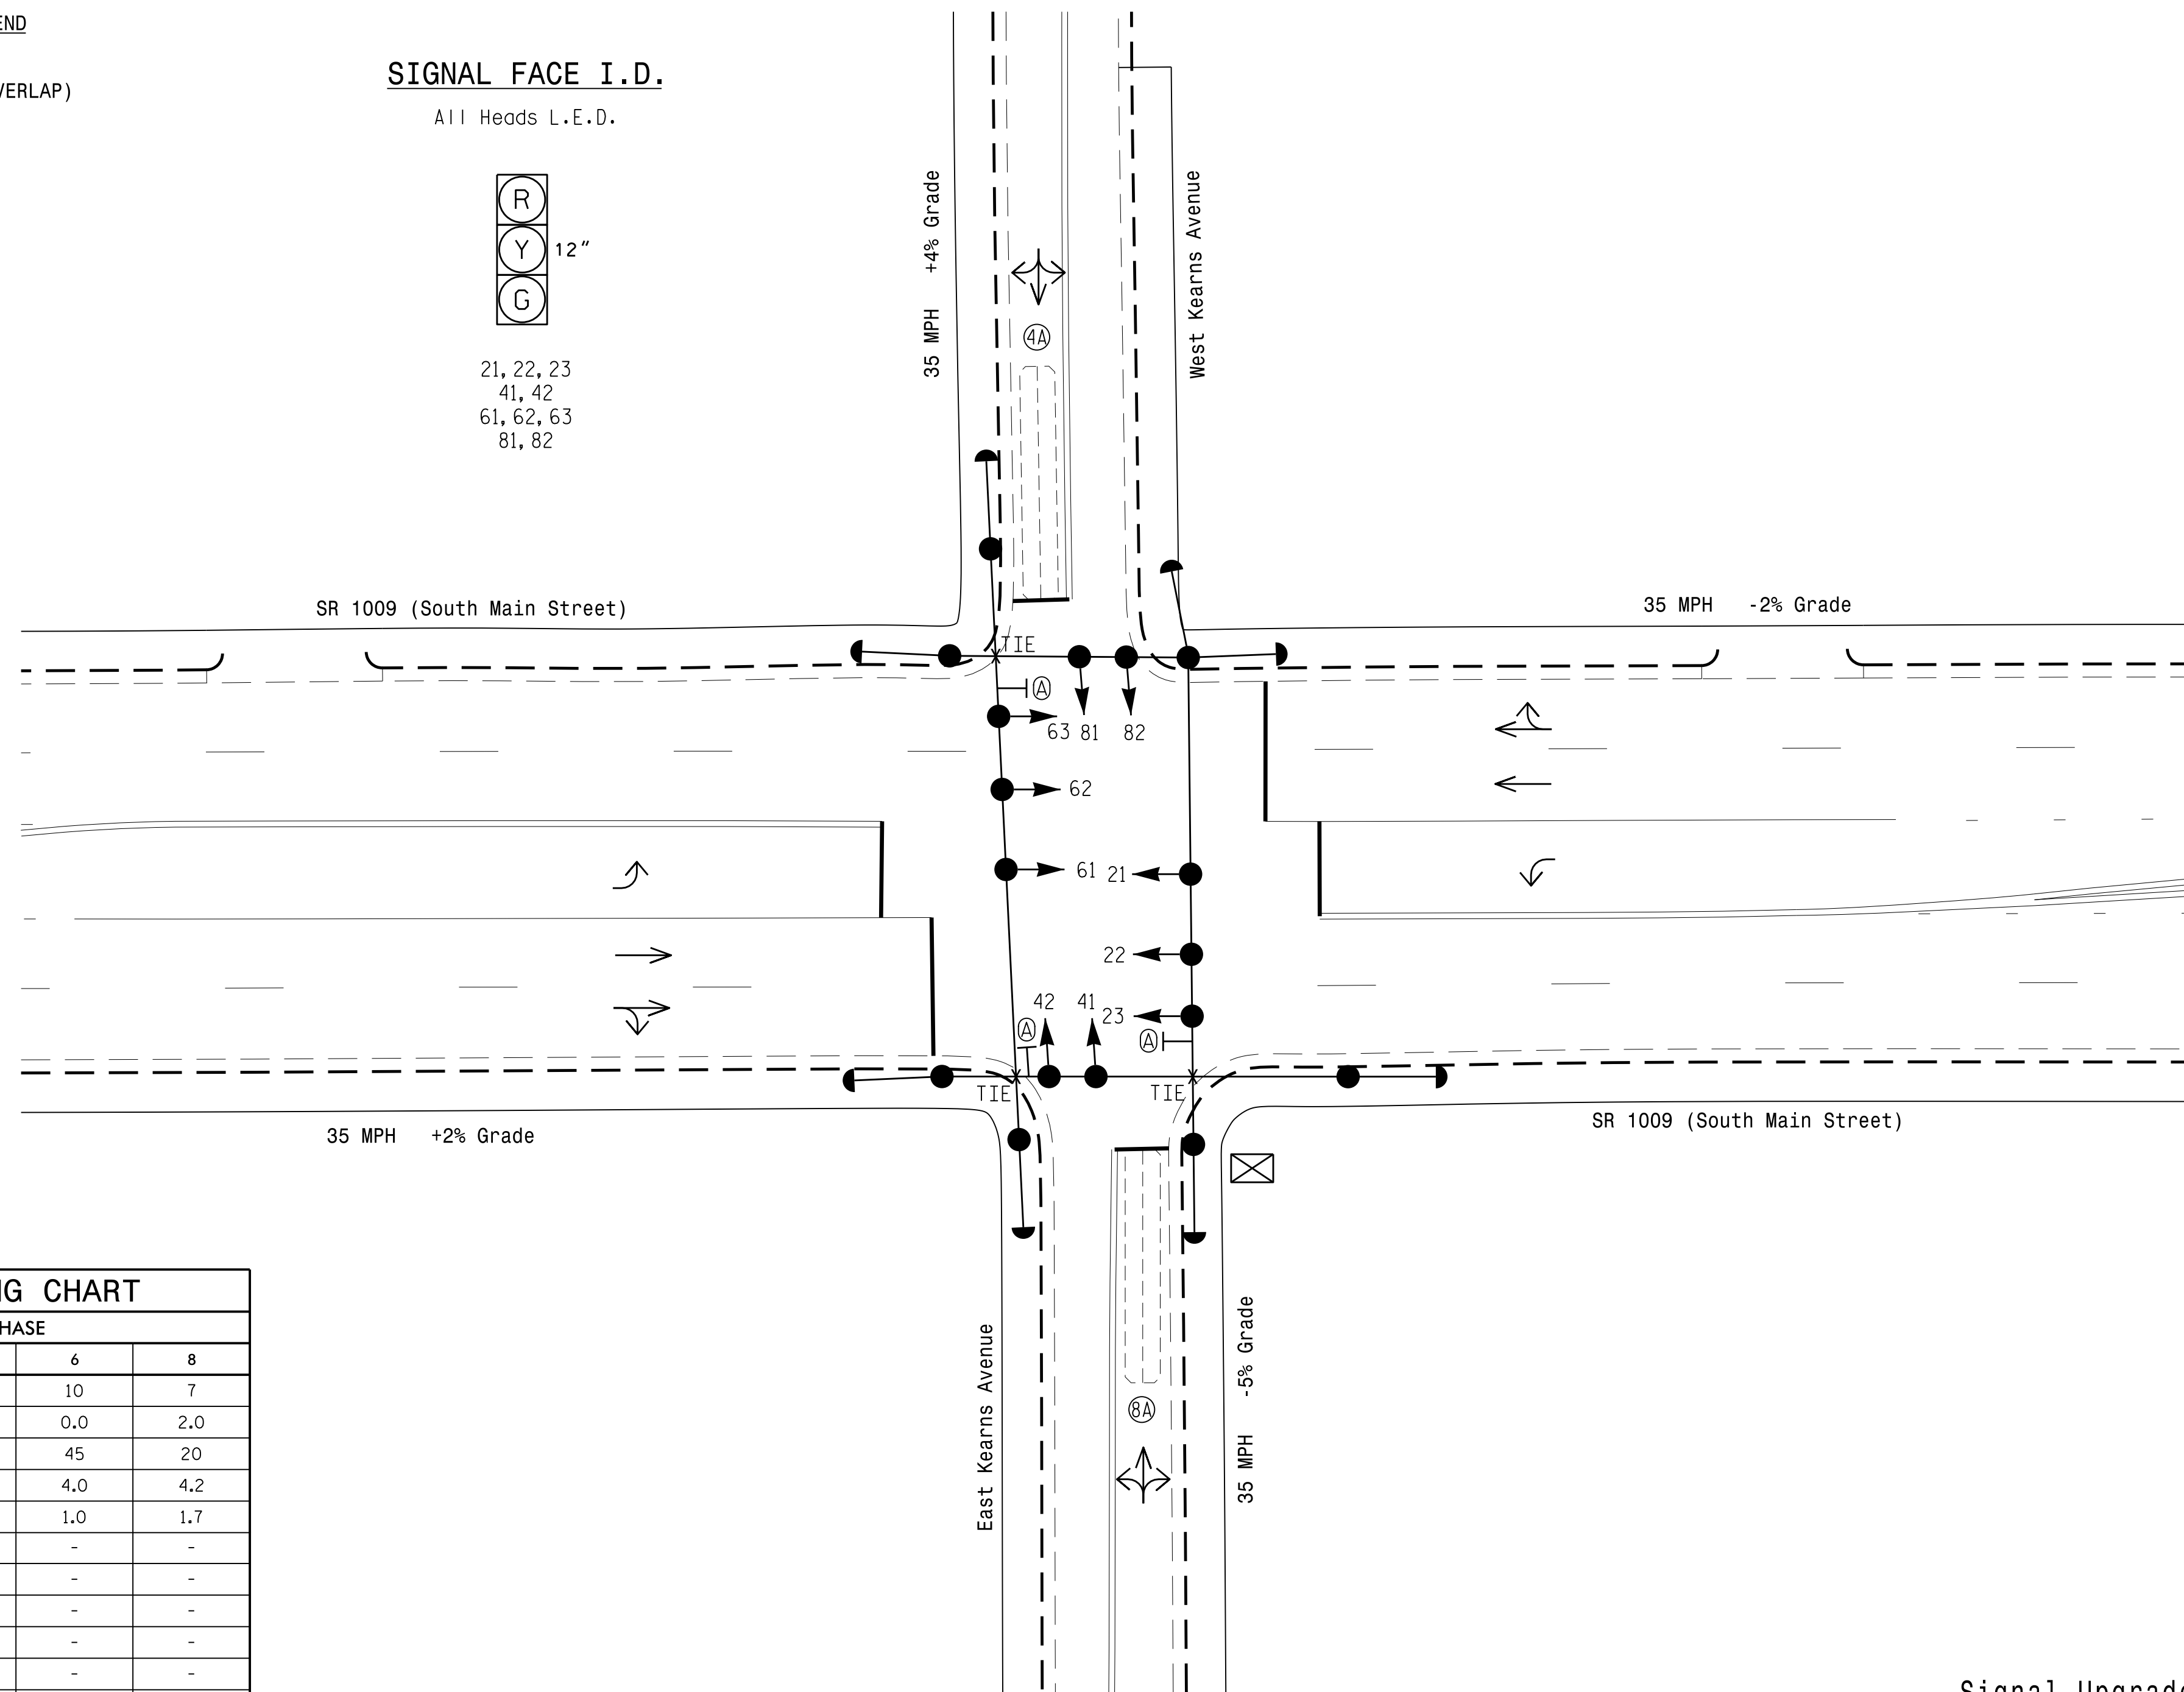

OASIS 2070 TIMING CHART

FEATURE	PHASE			
	2	4	6	8
Min Green 1 *	10	7	10	7
Extension 1 *	0.0	2.0	0.0	2.0
Max Green 1 *	45	20	45	20
Yellow Clearance	3.7	3.6	4.0	4.2
Red Clearance	1.2	1.6	1.0	1.7
Walk 1 *	-	-	-	-
Don't Walk 1	-	-	-	-
Seconds Per Actuation *	-	-	-	-
Max Variable Initial *	-	-	-	-
Time Before Reduction *	-	-	-	-
Time To Reduce *	-	-	-	-
Minimum Gap	-	-	-	-
Recall Mode	MAX RECALL	-	MAX RECALL	-
Vehicle Call Memory	-	-	-	-
Dual Entry	-	ON	-	ON
Simultaneous Gap	ON	ON	ON	ON

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

- | | | | | | |
|---|----------|--|-----|----------|--|
| ○ | PROPOSED | Traffic Signal Head | ● | EXISTING | Traffic Signal Head |
| ○ | PROPOSED | Modified Signal Head | N/A | EXISTING | N/A |
| ○ | PROPOSED | Sign | T | EXISTING | Sign |
| ○ | PROPOSED | Pedestrian Signal Head With Push Button & Sign | ○ | EXISTING | Pedestrian Signal Head With Push Button & Sign |
| ○ | PROPOSED | Signal Pole with Guy | ○ | EXISTING | Signal Pole with Guy |
| ○ | PROPOSED | Signal Pole with Sidewalk Guy | ○ | EXISTING | Signal Pole with Sidewalk Guy |
| ○ | PROPOSED | Inductive Loop Detector | ○ | EXISTING | Inductive Loop Detector |
| ○ | PROPOSED | Controller & Cabinet | ○ | EXISTING | Controller & Cabinet |
| ○ | PROPOSED | Junction Box | ○ | EXISTING | Junction Box |
| ○ | PROPOSED | 2-in Underground Conduit | ○ | EXISTING | 2-in Underground Conduit |
| ○ | PROPOSED | Right of Way | ○ | EXISTING | Right of Way |
| ○ | PROPOSED | Directional Arrow | ○ | EXISTING | Directional Arrow |
| ○ | PROPOSED | "NO TURN ON RED" Sign (R10-11) | ○ | EXISTING | "NO TURN ON RED" Sign (R10-11) |

Signal Upgrade

750 N. Greenfield Pkwy, Garner, NC 27529

**SR 1009 (South Main Street)
at
Kearns Avenue**

Division 7 Guilford County High Point

PLAN DATE: September 2014 PREPARED BY: Jeff Spence

PREPARED BY: R.N. Zinser REVIEWED BY:

SEAL

ROBERT J. ZIEMBA
ENGINEER

3/27/2015

SIG. INVENTORY NO. 07-0801

SCALE 0 20

1"=20'