


**EDI MODEL 2018ECLip-NC CONFLICT MONITOR
PROGRAMMING DETAIL**

(remove jumpers and set switches as shown)



REMOVE DIODE JUMPERS 1-5, 1-6, 2-5, 2-6, 3-7, 3-8, 3-10, 3-12, 4-7, 4-8, 4-10, 4-12, 7-10, 7-12, 8-10, 8-12 and 10-12.

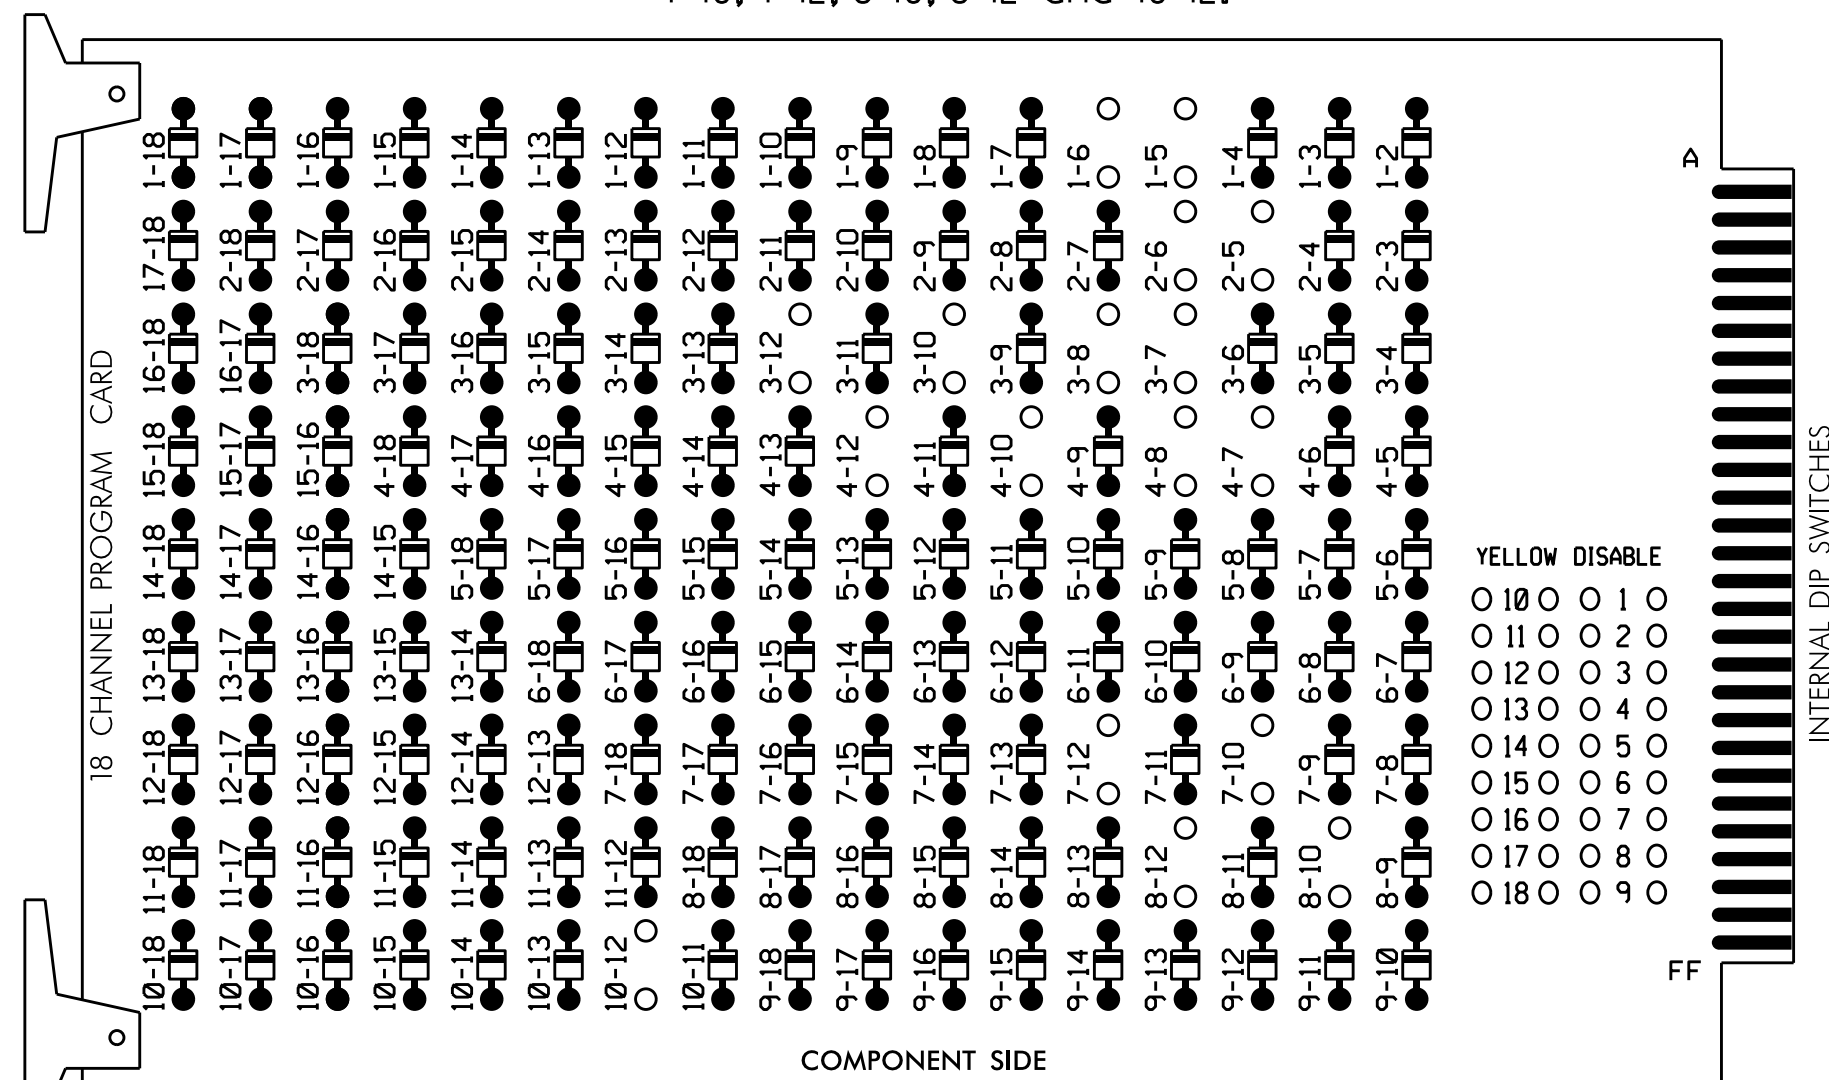

REMOVE JUMPERS AS SHOWN

NOTES:

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
- Ensure that Red Enable is active at all times during normal operation.
- Integrate monitor with Ethernet network in cabinet.

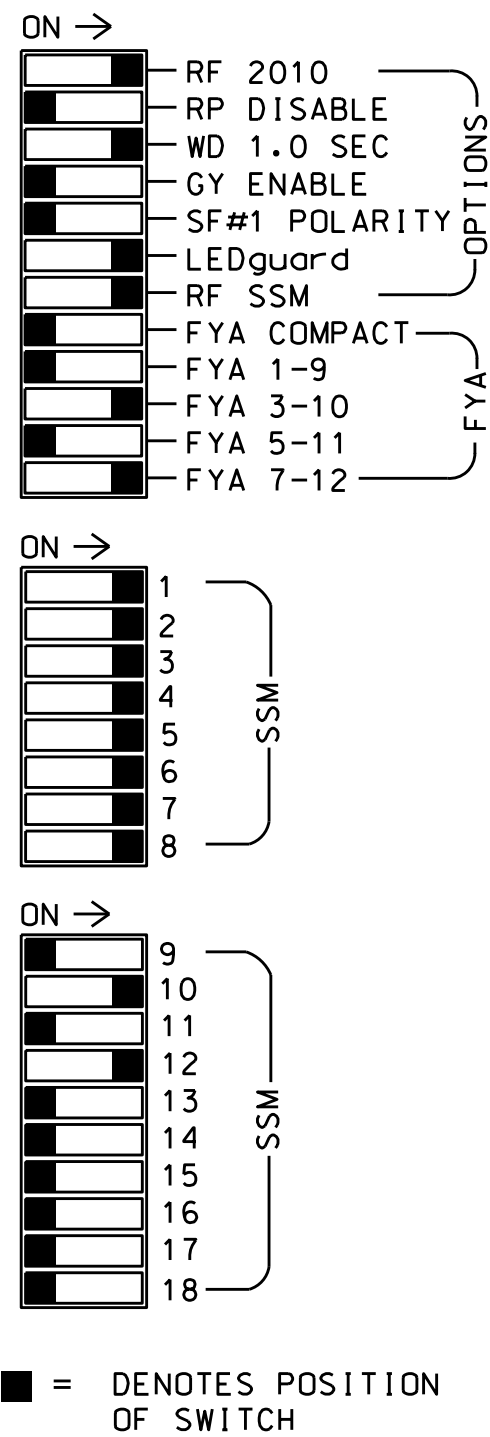

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program phases 4 and 8 for Dual Entry.
- Enable Simultaneous Gap-Out for all phases.
- Program phases 2 and 6 for Variable Initial and Gap Reduction.
- Program phases 2 and 6 for Start Up In Green.
- Program phases 2 and 6 for Yellow Flash, and overlap 2 as Wag Overlaps.
- The cabinet and controller are part of the High Point Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070L
 CABINET.....332 /W/ AUX
 SOFTWARE.....ECONOLITE OASIS
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S4,S5,S7,S8,S10,S11
 AUX S2,AUX S5
 PHASES USED.....1,2,3,4,5,6,7,8
 OVERLAP "A".....NOT USED
 OVERLAP "B".....3+4
 OVERLAP "C".....NOT USED
 OVERLAP "D".....7+8

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6	
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18	
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE	
SIGNAL HEAD NO.	11	21,22 23,24	NU	31*	24	41,42 43	NU	51	61,62 63	NU	71*	63	81,82 83	NU	NU	31*	NU	71*	NU
RED		128		*	101			134		*	107								
YELLOW		129			102			135			108								
GREEN		130			103			136			109								
RED ARROW	125							131								A124		A101	
YELLOW ARROW	126				117			132			123					A125		A102	
FLASHING YELLOW ARROW																A126		A103	
GREEN ARROW	127			118	118			133			124	124							


NU = Not Used

* Denotes install load resistor. See load resistor installation detail this sheet.

* See pictorial of head wiring in detail below.

4 SECTION FYA PPLT SIGNAL WIRING DETAIL

(wire signal heads as shown)

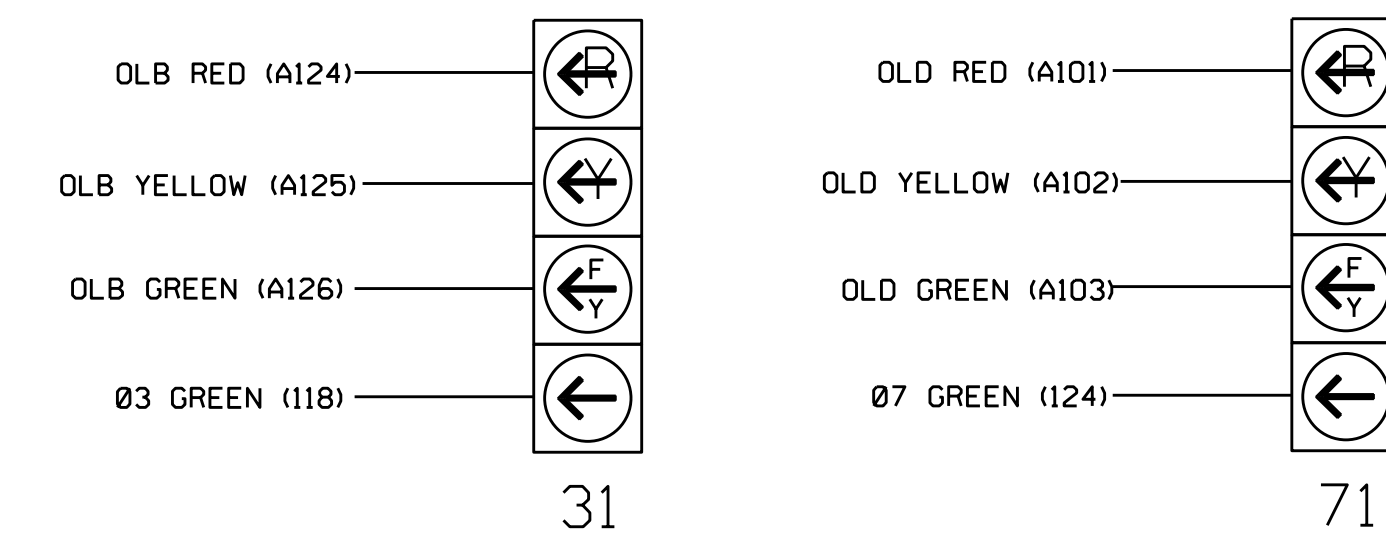

NOTE

- The sequence display for these signals require special logic programming. See sheet 2 for programming instructions.

INPUT FILE POSITION LAYOUT

(front view)

FILE "I"	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Ø 1	Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 7	Ø 8	Ø 9	Ø 10	Ø 11	Ø 12	Ø 13	Ø 14	FS
1A	2A,2B		3A	4A										DC ISOLATOR
NOT USED	NOT USED		NOT USED	NOT USED										ST
														DC ISOLATOR

EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
 ST = STOP TIME

⊗ Wired Input - Do not populate slot with detector card


INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
1A	TB2-1,2	I1U	56	18	1	1	Y	Y			
2A,2B	TB2-5,6	I2U	39	1	2	2	Y	Y			
3A ¹	TB4-5,6	I5U	58	20	3	3	Y	Y			10
	-	J8U	50	12	28	8	Y	Y			3
4A	TB4-9,10	I6U	41	3	4	4	Y	Y			
5A	TB3-1,2	J1U	55	17	5	5	Y	Y			
6A,6B,6C	TB3-5,6	J2U	40	2	6	6	Y	Y			
7A ²	TB5-5,6	J5U	57	19	7	7	Y	Y			10
	-	I8U	49	11	24	4	Y	Y			3
8A	TB5-9,10	J6U	42	4	8	8	Y	Y			
* S1	TB6-9,10	I9U	60	22	11	SYS					
* S2	TB6-11,12	I9L	62	24	13	SYS					

* System detector only. Remove the vehicle phase assigned to this detector in the default programming.

- Add jumper from I5-W to J8-W, on rear of input file.
- Add jumper from J5-W to I8-W, on rear of input file.


INPUT FILE POSITION LEGEND: J2L



LOAD RESISTOR INSTALLATION DETAIL

(install resistors as shown below)

VALUE (ohms)	WATTAGE
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

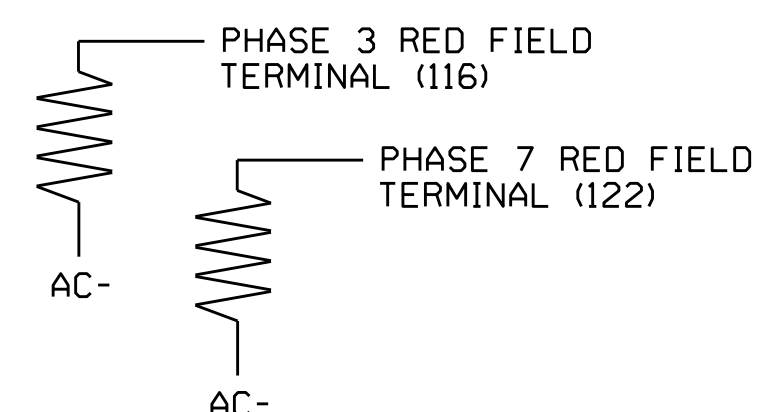

Electrical Detail - Sheet 1 of 2

Electrical and Programming Details for: NC 68 (Eastchester Dr.) at SR 1556 (Gallimore Dairy Rd.)

Prepared in the Offices of: **TRANSPO-MOBILITY AND SAFETY SOLUTIONS** (A Division of NORTH CAROLINA SIGNAL MANAGEMENT SYSTEMS)

750 N. Greenfield Pkwy, Garner, NC 27529

Division 7 Guilford County High Point

PLAN DATE: July 2014 REVIEWED BY: T. Joyce

PREPARED BY: B. SIMMONS REVIEWED BY:

REVISIONS INIT. DATE

DocuSigned by: **George C. Brown** 4/20/2015

SEAL: PROFESSIONAL ENGINEER, GEORGE C. BROWN, SEAL 022013

SIG. INVENTORY NO. 07-1438